Sultanate of Oman

Ministry of Agriculture, Fisheries & Water Resources

Consultancy Services for Feasibility Study and Design of Flood Protection Scheme in North and South Al Batinah Governorates



Channels Feasibility & Hydrological Report

Block No. 4

October 2026

RENARDET S.A. & Partners CONSULTING ENGINEERS L.L.C.

ARTELIA

Document Control

Item	Detail
Project	Consultancy Services for Feasibility Study and Design of Flood Protection Scheme in North and South Al Batinah Governorates
Client	Ministry of Agriculture, Fisheries Wealth and Water Resources, Sultanate of Oman
Consultant	Renardet S.A. & Partners Consulting Engineers L.L.C., in joint venture with Artelia Muscat
Document	Channels Feasibility & Hydrological Report, Block No. 4
Revision	00
Date	October 2026
Status	Issued for review

	Name	Signature	Date
Prepared by			
Checked by			
Approved by			

Revision	Date	Description
00	October 2026	First issue

Table of Contents

1. Introduction 1
2. Hydrology 3
3. Channel alignments 8
4. Channel condition and conflicts 12
5. Rainfall-runoff simulation 16
5.1. Dams' information 23
5.2. Dams' elevation-volume-area curves 26
5.3. Reservoir routing 28
5.4. Dams' peak flows 28
5.5. Reservoir levels 30
5.6. Hydrographs 30
5.7. Flood protection performance 31
6. Sediment yield and reservoir sedimentation 33
6.1. Soil loss of the catchments 33
6.2. Sediment delivery and yield 36
6.3. Reservoir volume reduction 39
6.3.1. Reservoir sediment trap efficiency 39
6.3.2. Density of deposited sediment 39
6.3.3. Sediment distribution: Empirical Area-Reduction Method 40
6.3.4. Input data and results 42
7. Climate at the dam sites 44
7.1. Record used 44
7.2. Temperature and rainfall 44
7.3. Wind 46
7.4. Climate change 47
8. Hydraulic design criteria 49
8.1. Main issues in channel design 51
8.2. Channel depth 52
8.3. Channel sections for the 200-year flow 54
9. Outfalls 64
10. Culverts and bridges 67
11. Dykes 70

12. Quantities and cost estimate 72
13. Conclusion 75
Appendix A – Inflow hydrographs of the dams 76
Appendix B – Reservoir curves after sedimentation 81
Appendix C – Reach characteristics at the 200-year flow 86
Appendix D – Plan and profile drawings 91
Appendix E – Costs dashboard 92

List of Tables

Table 1 – Channel design process – Block 04 1
Table 2 – Design rainfalls 3
Table 3 – Area reduction factor 5
Table 4 – Channels and dykes in Block 04 8
Table 5 – Dams' information 23
Table 6 – Dam catchments 24
Table 7 – Dams' elevation-volume-area curves 26
Table 8 – Reservoir curves at full supply level and at crest 28
Table 9 – Dams' peak flow (m^3/s) for the return periods 29
Table 10 – Dams' inflow and outflow volume (Mm^3) for the return periods 30
Table 11 – Peak reservoir level (m) for the return periods 30
Table 12 – Flood protection performance of the dams 32
Table 13 – RUSLE factors and soil loss, catchment means 34
Table 14 – Sediment delivery and yield of the dam catchments 37
Table 15 – Sediment-supply and soil-texture inputs 42
Table 16 – Reservoir volume reduction after 50 and 100 years 42
Table 17 – Temperature and rainfall at the dam sites, 2001–2023 44
Table 18 – Rain gauges nearest to the dams and their records 46

Table 19 – Wind roses at the dam sites, all hours 2015–2024: the direction the wind blows from and the share of hours in each speed class 46

Table 20 – Channel design criteria 49

Table 21 – Mean tidal levels in North and South Al Batinah (m), Oman Maritime Book 2024 49

Table 22 – Challenges in the design of the channels 52

Table 23 – Channel sections for the 200-year flow 54

Table 24 – Channel sizes inventory: depth x bed width (m) and the length of reaches of that size (m) 59

Table 25 – Outfalls: 200-year flow, bed width, levels and tidal margin 66

Table 26 – Existing culverts at the crossings 67

Table 27 – Proposed box culverts at the road crossings (200-year flow) 68

Table 28 – Dykes: 200-year depth along the line, adopted height and cost 70

Table 29 – Unit rates of the estimate 72

Table 30 – Channels: earthworks, protection, land and cost 72

Table 31 – Land take of the channel corridors by land use of the cadastre and its cost 73

Table 32 – Cost estimate of the channel scheme of Block 04 (million OMR) 74

List of Figures

Figure 1 – Channel design process 2

Figure 2 – Temporal distribution of the 24-hour design storm: cumulative share of the depth (left) and the share falling in each 10-minute interval (right), for the five patterns 4

Figure 3 – Area reduction factor against catchment area 6

Figure 4 – SCS curve number grid of Block 04 7

Figure 5 – Global catchments of Block 04: Al Hawasinah, Shafan, Sarami and Sakhin 9

Figure 6 – Channel alignments to control the 200-year flood, on the 200-year flood depth without the scheme 10

Figure 7 – Channel and dyke routes by category, with the channel and dyke names 11

Figure 8 – Roads and utilities 13

Figure 9 – Land use 15

Figure 10 – HEC-HMS model for Block 04 17

Figure 11 – (a) Q200 (m³/s) at the junctions of the HEC-HMS model, dams in place 19

Figure 12 – (b) Q200 (m³/s) at the dams and the junctions downstream of them, dams in place 20

Figure 13 – Intermediate catchments with no dam in their upstream network 22

Figure 14 – The nine dams of Block 04, their catchments and reservoirs, and the channel and dyke alignments of the plain 25

Figure 15 – Dams' peak inflow and outflow for the 100-, 200- and 500-year events 29

Figure 16 – Inflow and outflow hydrographs of the nine dams for the 200-year event 31

Figure 17 – RUSLE factors and soil loss over the dam catchments, and the sediment yield delivered to each dam 35

Figure 18 – From soil loss to sediment yield: the catchment mean soil loss, the delivery ratio used and the yield delivered to each dam 37

Figure 19 – Sediment delivered to each dam in 50 years (Mcm) and the storage lost at full supply level 38

Figure 20 – Sediment distribution design curves (reproduction of USBR Figure 2.25): percentage of the reservoir depth against the percentage of the sediment deposited, for types I to IV and the area-increment line 41

Figure 21 – Relative sediment-area functions $a(p) = C \cdot p^{A} \cdot (1-p)^{B}$ for reservoir types I to IV 41

Figure 22 – Storage lost at full supply level after 50 and 100 years, per dam 43

Figure 23 – Hawasinah 02: elevation-area-volume curves before and after sedimentation, capacity on the lower axis and area on the upper axis. The curves of the other dams are in Appendix B 43

Figure 24 – Monthly air temperature and rainfall of Block 04, 2001–2023, averaged over the nine dam sites 45

Figure 25 – Annual rainfall of Block 04, 2001–2023, averaged over the nine dam sites, and its mean 45

Figure 26 – Typical channel section in fill 50

Figure 27 – Typical channel section in cut 50

Figure 28 – Channel depth: 2.5 m, or 3 m where the wadi is deeper 53

Figure 29 – Designed bed width of the channels for the 200-year flow (m) 56

Figure 30 – 200-year design flow along the channels (m³/s) 57

Figure 31 – Channels and dykes of Block 04 by class 58

Figure 32 – Distribution of the designed bed widths, by length of reach, in 50 m bins 58

Figure 33 – Designed bed width against the 200-year design flow of the reach 58

Figure 34 – Channels by class with their names and the reach numbers of the hydraulic model: Al Hawasinah catchment 60

Figure 35 – Channels by class with their names and the reach numbers of the hydraulic model: Shafan catchment..... 61

Figure 36 – Channels by class with their names and the reach numbers of the hydraulic model: Sarami catchment..... 62

Figure 37 – Channels by class with their names and the reach numbers of the hydraulic model: Sakhin catchment..... 63

Figure 38 – 200-year peak flow at the thirteen outfalls without and with the dams 64

Figure 39 – 200-year runoff volume at the thirteen outfalls without and with the dams 64

Figure 40 – Outfalls of the channel system: designed invert, existing terrain level and their difference (m) 65

Figure 41 – Road crossings and the proposed box culverts..... 69

Figure 42 – Dyke heights (m)..... 71

Figure 43 – Cost of the channels (construction and land), dykes and culverts by catchment..... 74

Figure 44 – Hawasinah 02: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 76

Figure 45 – Hawasinah 11: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 76

Figure 46 – Hawasinah UP: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 77

Figure 47 – Shafan 02: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 77

Figure 48 – Shafan 08: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 78

Figure 49 – Sarami 03: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 78

Figure 50 – Sarami 05: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 79

Figure 51 – Sakhin 04: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP. 79

Figure 52 – Sakhin 08 (Mehmum): inflow hydrographs for the return periods of 2 to 10 000 years and the PMP 80

Figure 53 – Hawasinah 02: reservoir curves before and after sedimentation 81

Figure 54 – Hawasinah 11: reservoir curves before and after sedimentation 81

Figure 55 – Hawasinah UP: reservoir curves before and after sedimentation 82

Figure 56 – Shafan 02: reservoir curves before and after sedimentation 82

Figure 57 – Shafan 08: reservoir curves before and after sedimentation 83

Figure 58 – Sarami 03: reservoir curves before and after sedimentation 83

Figure 59 – Sarami 05: reservoir curves before and after sedimentation 84

Figure 60 – Sakhin 04: reservoir curves before and after sedimentation 84

Figure 61 – Sakhin 08 (Mehmum): reservoir curves before and after sedimentation 85

Figure 62 – Costs dashboard: channels, dykes and culverts by catchment, and the total by infrastructure type 93

Figure 63 – Costs dashboard: every channel, dyke and culvert 94

List of Abbreviations

Term	Meaning
ARF	Area reduction factor
CN	SCS curve number
DEM	Digital elevation model
EAV	Elevation-area-volume curve of a reservoir
ECMWF	European Centre for Medium-Range Weather Forecasts
ESA	European Space Agency
FHWA	Federal Highway Administration (United States)
FP	Flood protection (channel or dyke)
FSL	Full supply level
GCA	Global catchment area
HEC-HMS	Hydrologic Engineering Center, Hydrologic Modeling System
HEC-RAS	Hydrologic Engineering Center, River Analysis System
HW	Headwater depth at a culvert inlet
IPCC	Intergovernmental Panel on Climate Change
ISRIC	International Soil Reference and Information Centre
MAFWR	Ministry of Agriculture, Fisheries Wealth and Water Resources
MCM, Mm^3	Million cubic metres
MHHW	Mean higher high water
MHLW	Mean higher low water
MLHW	Mean lower high water
MLLW	Mean lower low water
NDVI	Normalised difference vegetation index
OHDS	Oman Highway Design Standards
OMR	Omani rial
OQ	OQ, the Omani energy company (pipelines)
PMF	Probable maximum flood
PMP	Probable maximum precipitation
Q200	Peak flow of the 200-year event
RUSLE	Revised Universal Soil Loss Equation
SCS	Soil Conservation Service (United States), now NRCS
SDR	Sediment delivery ratio
SM	Stormwater main (channel or dyke)
SS	Stormwater secondary (channel or dyke)
SM2RAIN	Soil-moisture-based rainfall estimate
UTM	Universal Transverse Mercator projection
USBR	United States Bureau of Reclamation
WGS 84	World Geodetic System 1984

Executive Summary

Project context

The Ministry of Agriculture, Fisheries Wealth and Water Resources commissioned Renardet S.A. & Partners Consulting Engineers, in joint venture with Artelia Muscat, to prepare the comprehensive master plan for flood protection dams, river training schemes and stormwater drainage in North and South Al Batinah. Block 04 covers the wadis of Al Hawasinah, Shafan, Sarami and Sakhin between the Hajar foothills and the coast, from Al Khaburah to Saham. The scheme consists of nine flood-protection dams and a network of flood-protection and stormwater channels and dykes that carry the routed dam outflows and the runoff of the plain to the sea.

Scope of this report

This report presents the hydrology of Block 04 and the design information of the nine dams: catchments, inflow hydrographs for thirteen return periods up to the probable maximum precipitation, reservoir elevation-area-volume curves, reservoir routing, the sediment yield of the catchments and the storage lost to sedimentation, and the climate at the dam sites. It also sets out the channel alignments, the conditions and conflicts along them, the hydraulic design criteria of the channels, the section of every channel for the 200-year flow, the culverts at the road crossings, the dyke heights and the cost estimate of the scheme.

Key findings

- The nine dams control 1,640 km^2 of catchment and hold 276 Mm^3 at full supply level. The 200-year peak inflows range from 961 to 4,109 m^3/s.
- Four reservoirs (Shafan 02, Sarami 03, Sarami 05, Sakhin 04) store the whole 200-year flood; Hawasinah 02, whose 11 Mm^3 reservoir drains 420 km^2, attenuates the 200-year peak by 2 % only.
- At the probable maximum flood the reservoirs rise 4.7 to 5.0 m above full supply level.
- The 37 channels are sized for the 200-year flow with the dams in place: the flood-protection channels carry 373 to 1,461 m^3/s with bed widths of up to 488 m at a depth of 2.5 m, or 3 m where the wadi is deeper.
- The channels cross the Batinah Highway and the Coastal Road at 31 points; none of the structures on file has the width of its channel, and 868 box-culvert cells of 4 m are proposed. The 36 dykes stand 1.6 to 4.5 m high on the 200-year flood depth of the plain.

- The estimate of the scheme is 268.8 million OMR: 73.0 for the construction of the channels, 167.8 for the land of their corridors, 8.4 for the dykes and 19.5 for the culverts, at the unit rates and land rates of the master plan.

- The sediment yield of the catchments is 90 to 185 $m^3/km^2/yr$. Over 50 years the reservoirs lose 1.9 to 36.9 % of their storage at full supply level; Hawasinah 02 (37 % in 50 years, 74 % in 100) and Shafan 08 (20 % in 50 years) need a sediment management provision.

- The climate at the dam sites is hot and arid: a mean annual temperature of 28.4 to 29.1 °C and a mean annual rainfall of 66 to 106 mm; the nearest rain gauges recorded 135 to 263 mm a year over their short records.

1. INTRODUCTION

The study area covers the governorates of North and South Al Batinah in northern Oman. The full project title is “Consultancy Services for Study and Prepare Comprehensive Master Plan for Flood Protection Dams, River Training Schemes and Updating of Flood Maps and Stormwater Drainage System in North and South Al Batinah Governorates, Sultanate of Oman”. The master plan combines dams, dykes and stormwater channels to protect the urbanised areas, the industrial zones, the infrastructure and the planned developments of the plain from flood damage.

Block 04 lies between Al Khaburah and Saham. Its wadis rise in the Hajar foothills and run 15 to 25 km across the coastal plain before reaching the Gulf of Oman. Nine flood-protection dams sit at the foot of the hills: Hawasinah 02, Hawasinah 11 and Hawasinah UP on Wadi Al Hawasinah, Shafan 02 and Shafan 08 on Wadi Shafan, Sarami 03 and Sarami 05 on Wadi Sarami, and Sakhin 04 and Sakhin 08 (Mehmum) on Wadi Sakhin. Downstream of the dams, flood-protection channels, stormwater channels and dykes take the routed outflows and the runoff of the plain to the sea.

All channels are designed with the upstream dams in place, since the dams attenuate the peak inflows, and the design target is the 200-year flood. Attenuated and routed dam outflows are conveyed through the channel network to the sea; dyke heights follow from two-dimensional hydrodynamic simulation. The design process follows the stages of Table 1.

Table 1 – Channel design process – Block 04

Stage	Title	Key components and methods
1	Project input	Design rainfall, topography, land use, dam characteristics (height, reservoir, spillway)
2	Catchment analysis	HEC-HMS subbasin delineation, area reduction factor, SCS curve number, time of concentration, reservoir and reach routing
3	Rainfall-runoff simulation (HEC-HMS)	200-year peak flow and the other return periods, inflow and outflow hydrographs, reservoir levels, sediment yield and reservoir sedimentation
4	Channel alignment	HEC-RAS 2D results, wadi geometry, site visits, client and authority input
5	Hydraulic channel design (SewerGEMS)	Manning equation, depth, slope, velocity, freeboard, culvert sizing, constraints (OQ pipelines, bridges and culverts)
6	Performance assessment (HEC-RAS)	Dyke heights, culvert and bridge capacity, outfalls, 200-year protection check
7	Outputs	Channel dimensions, dyke heights, crossing capacities, solutions for bottlenecks

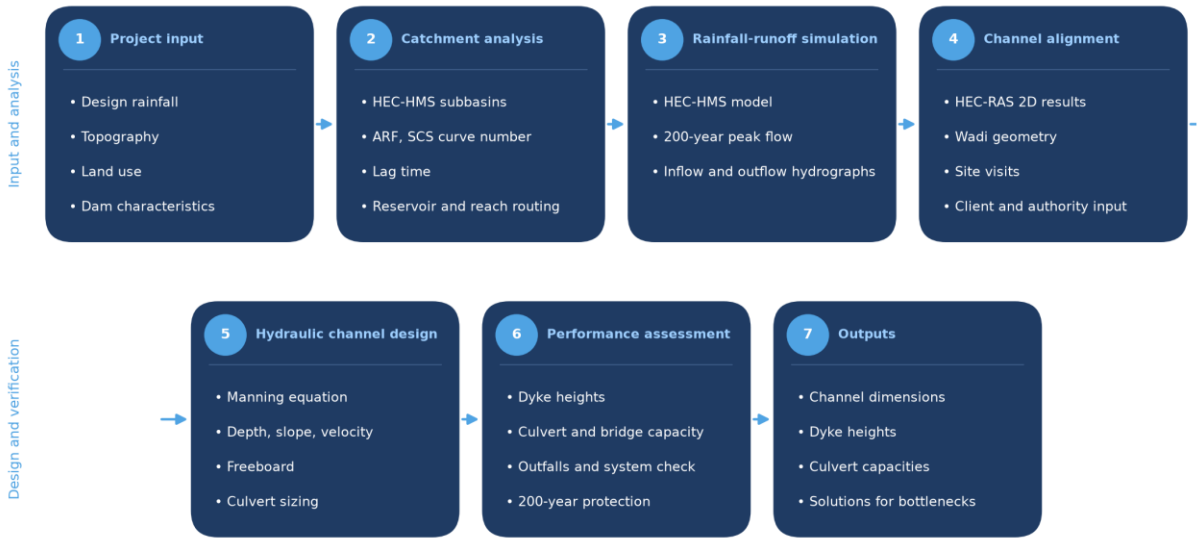


Figure 1 – Channel design process

2. HYDROLOGY

A comprehensive nationwide hydrology analysis was conducted for the Ministry. It covers all the rainfall stations: data cleaning, trend and outlier tests, gap filling, distribution fitting and a regional frequency analysis of the rainfall depth of each region. The 24-hour design precipitation depths and the temporal patterns of that study, for the return periods of 2 to 10 000 years, drive the rainfall-runoff simulation of Block 04.[1]

Table 2 – Design rainfalls

Recurrence interval (years)	Depth (mm)
2	27.6
5	55.3
10	105.5
25	137.5
50	168.1
100	205.4
200	251.0
500	327.2
1000	399.9
2000	488.7
5000	639.1
10000	685.1
PMP	PMP grid, 500 to 1 840 mm

The 24-hour depth is distributed in time with the temporal patterns of the nationwide study (Figure 2), one for the 2-year storm, one for the 5-year, one for the 10- to 1 000-year storms, one for the 2 000- to 10 000-year storms and one for the probable maximum precipitation. All five are centred: the heaviest interval falls at the twelfth hour, and the rarer the event the flatter the pattern, from a 2-year storm that drops a third of its depth in ten minutes to a probable maximum storm spread over the whole day.

[1] MAFWR, nationwide hydrology study: regional frequency analysis of the 24-hour rainfall, design patterns and the PMP grid.

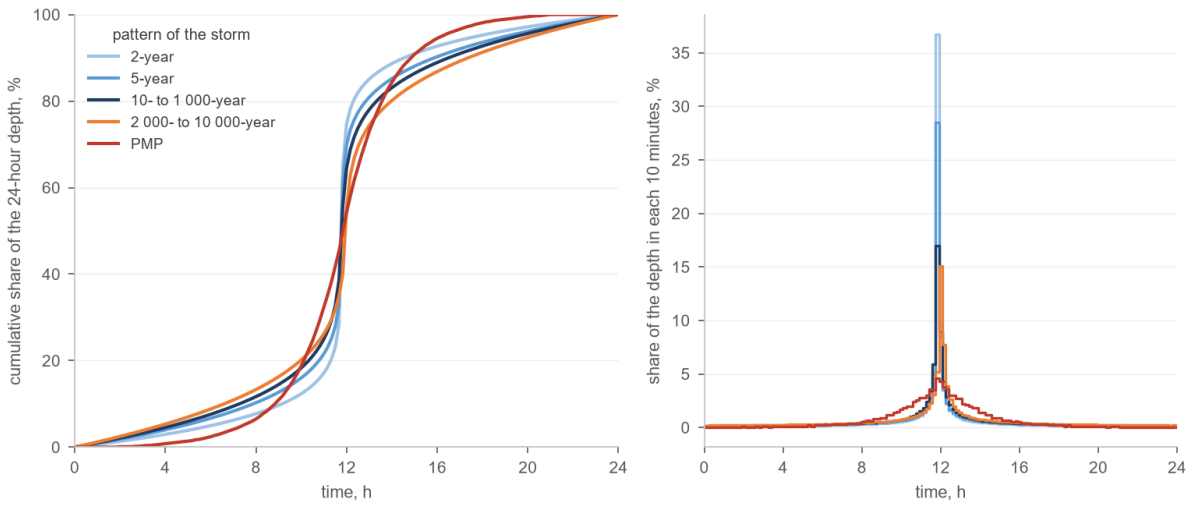


Figure 2 – Temporal distribution of the 24-hour design storm: cumulative share of the depth (left) and the share falling in each 10-minute interval (right), for the five patterns

The probable maximum precipitation is estimated with the storm transposition and moisture maximisation method recommended by the World Meteorological Organisation. The severest historical storms of the region are transposed to the catchment of interest and their precipitable water is raised to its theoretical upper limit on atmospheric thermodynamic principles. The resulting values are the greatest depth of precipitation that is physically possible for a given duration and area, and the basis for the design of critical hydraulic structures. The nationwide PMP grid supplies the 24-hour depth at each catchment; the dam spillways are sized for the probable maximum flood that results from it.

The area reduction factor accounts for the spatial variability of rainfall over a catchment. Point rainfall overstates the average depth over a large catchment, because an intense storm cell seldom covers the whole catchment at once. The factor, a dimensionless value of 1 or less, converts the design point depth to the areal depth. The values of the nationwide study (Table 3) are applied to every catchment through depth-area analyses in HEC-HMS: each element of the model is computed with the storm reduced for its own contributing area, so the peak at a dam site and the peak at a channel junction each carry the right reduction. The reduction matters for the larger catchments of Block 04, where it lowers the computed peaks appreciably.

Table 3 – Area reduction factor

Area (km^2)	ARF
1	1.000
5	0.994
10	0.987
20	0.976
30	0.965
40	0.956
50	0.948
100	0.913
200	0.864
500	0.776
1000	0.694
2000	0.606

The curve number grid combines two global datasets: the ESA WorldCover 2020 land cover at 10 m, which classifies the surface roughness and vegetation, and the ISRIC SoilGrids texture at 250 m, from which the hydrologic soil groups follow. The two are aligned and combined through the standard SCS lookup table into a spatially distributed curve number. The area-weighted curve numbers of the dam catchments lie between 87.7 (Sarami 05 and Sakhin 04) and 90.5 (Hawasinah 11), the response of bare, rocky mountain soils. The initial abstraction and the lag time of each subbasin follow the SCS and Kirpich relations:

$$I_a = 0.2\,S, \quad S = 25.4\left(\frac{1000}{CN} - 10\right) \tag{1}$$

$$t_{lag} = 0.6\,\frac{1}{52}\,L^{0.77}\,S^{-0.385} \tag{2}$$

Ia: initial abstraction, mm

S: potential maximum retention, mm

CN: SCS curve number, –

t_{lag}: lag time, min

L: length of the 10–85 flow path, m

S: slope of the 10–85 flow path, m/m

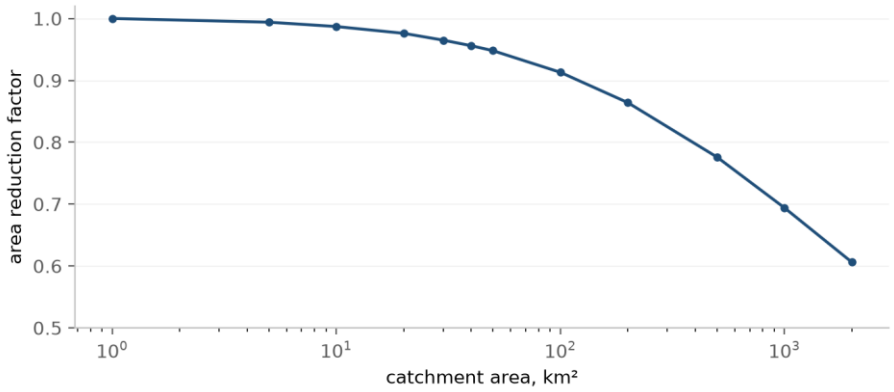


Figure 3 – Area reduction factor against catchment area

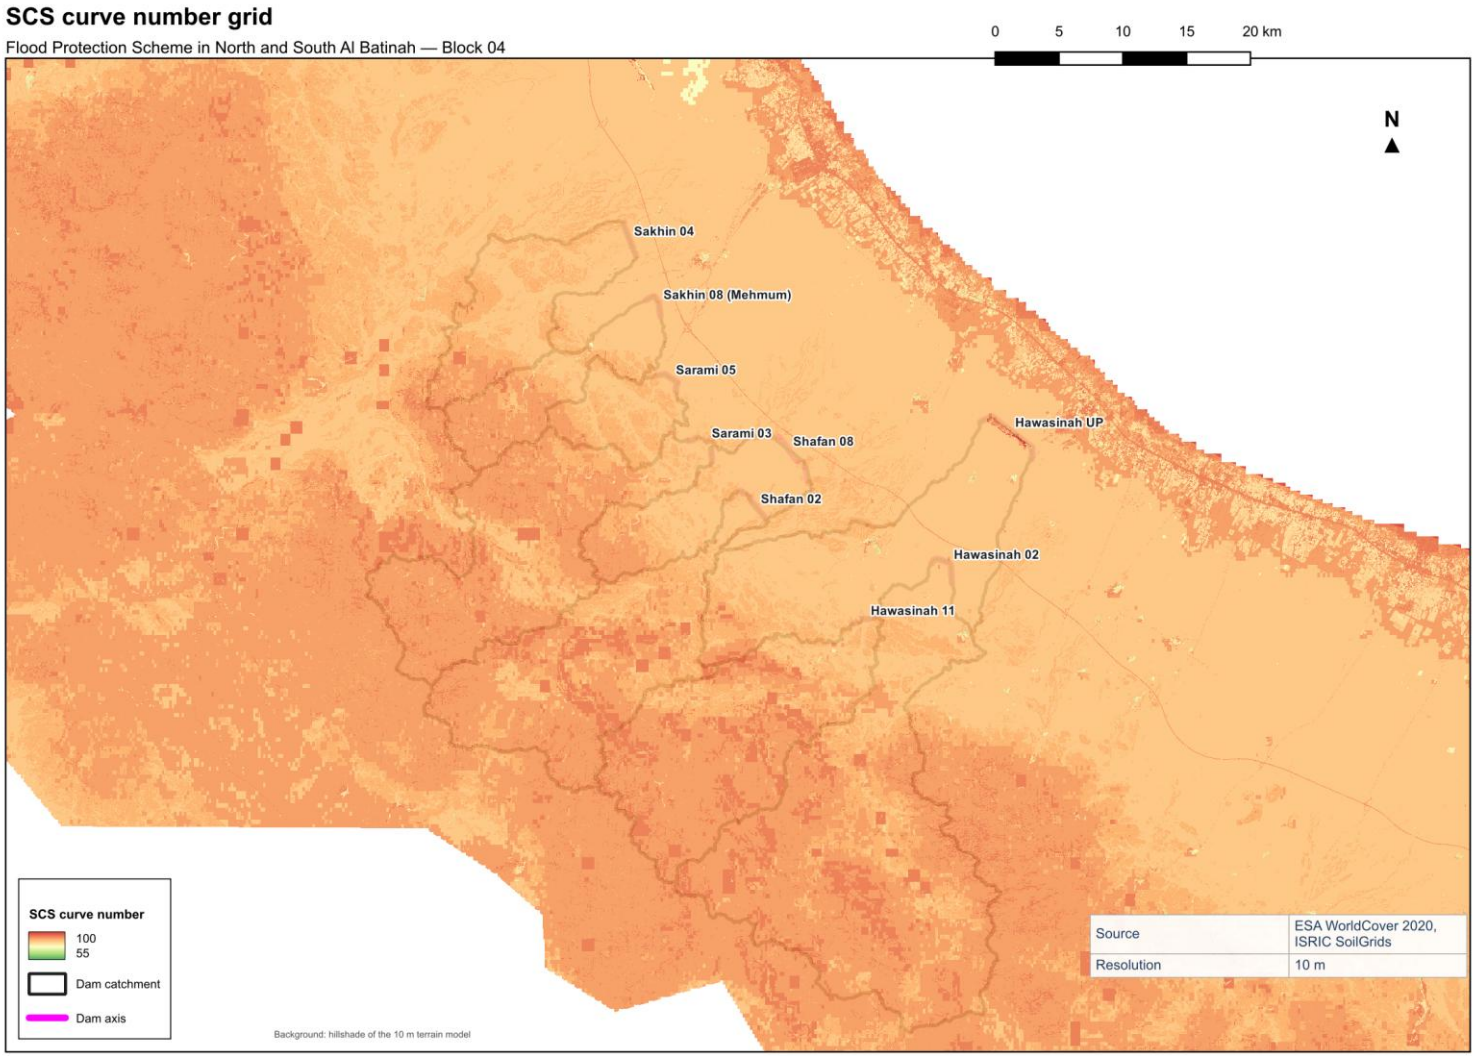


Figure 4 – SCS curve number grid of Block 04

3. CHANNEL ALIGNMENTS

Block 04 covers the four global catchments of Al Hawasinah, Shafan, Sarami and Sakhin (Figure 5), the wadis that reach the coast between Al Khaburah and Saham.

The channel routes were chosen from the two-dimensional flood simulation of the plain, the geometry of the existing wadis, and the site visits made with the client and the local authorities. The flood flow pattern depends on the terrain: where the wadis leave the foothills the flow is confined, and where the plain flattens it spreads and ponds. The channels follow the wadis wherever a defined bed exists and cross the flat ground on the shortest route to the sea.

By the flood or stormwater flow they carry, the channels are classified in three categories (Table 4 and Figure 7): flood-protection channels, which take the routed outflows of the dams and the main wadis to the sea; stormwater main channels, which collect the runoff of the larger intermediate catchments of the plain; and stormwater secondary channels, which drain the local catchments between them. Dykes of the same three classes confine the flow where the ground is too flat for a channel to hold it.

Table 4 – Channels and dykes in Block 04

Type	Length (km)
Flood protection channel	56
Stormwater main channel	69
Stormwater secondary channel	97
Flood protection dyke	49
Stormwater main dyke	7
Stormwater secondary dyke	7
Total	**284**

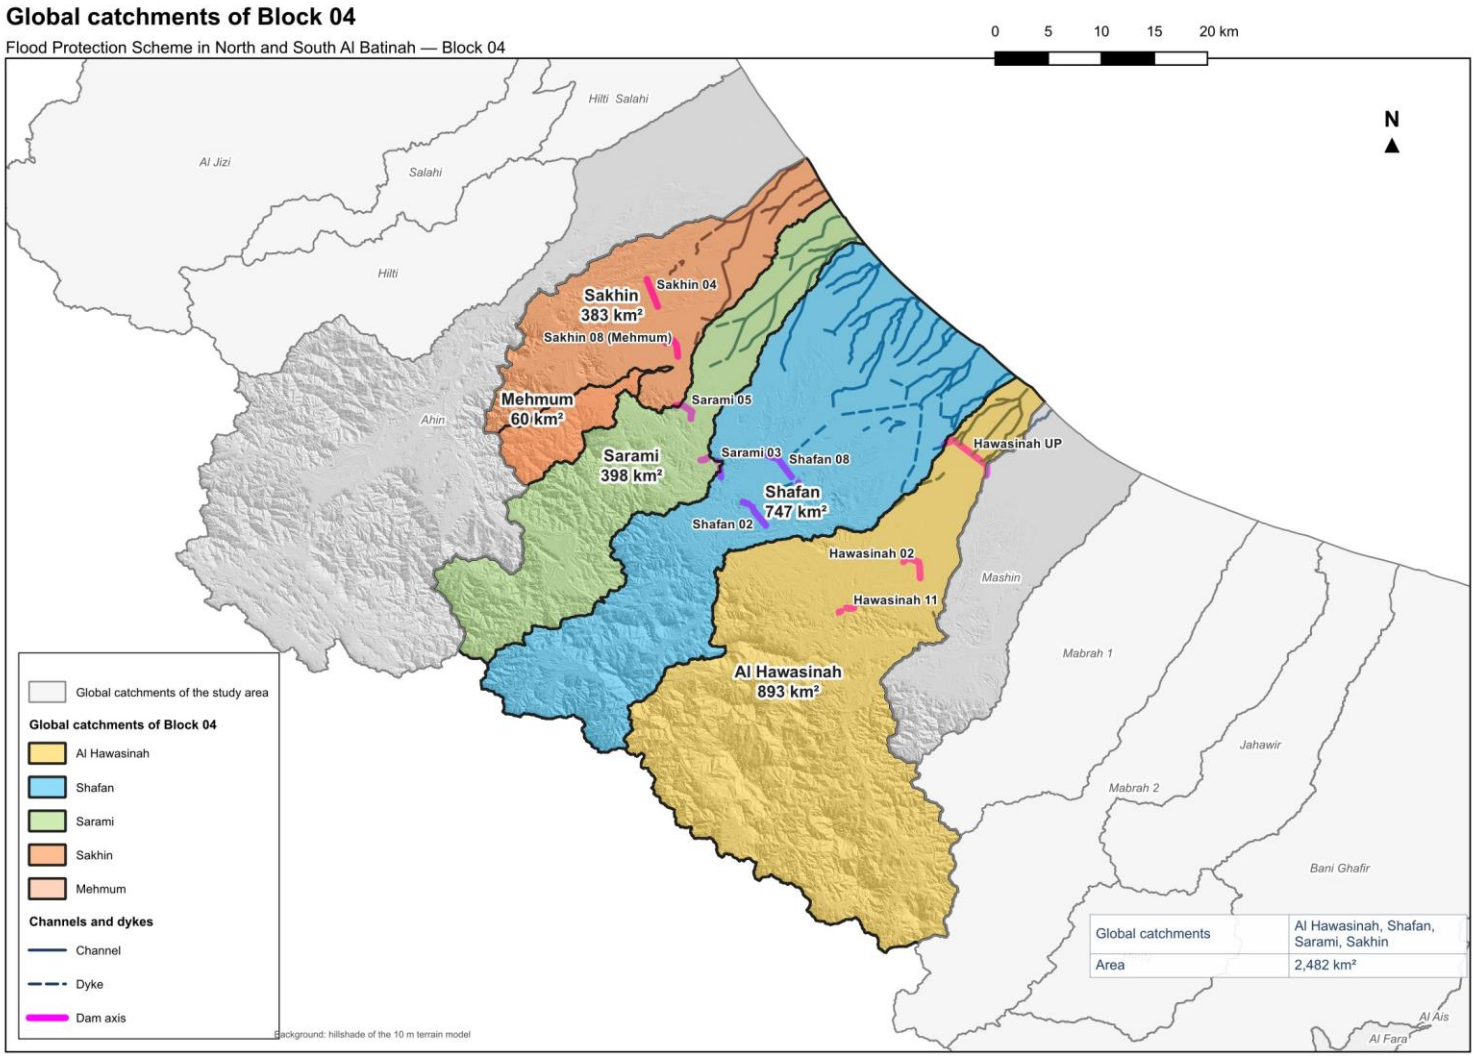


Figure 5 – Global catchments of Block 04: Al Hawasinah, Shafan, Sarami and Sakhin

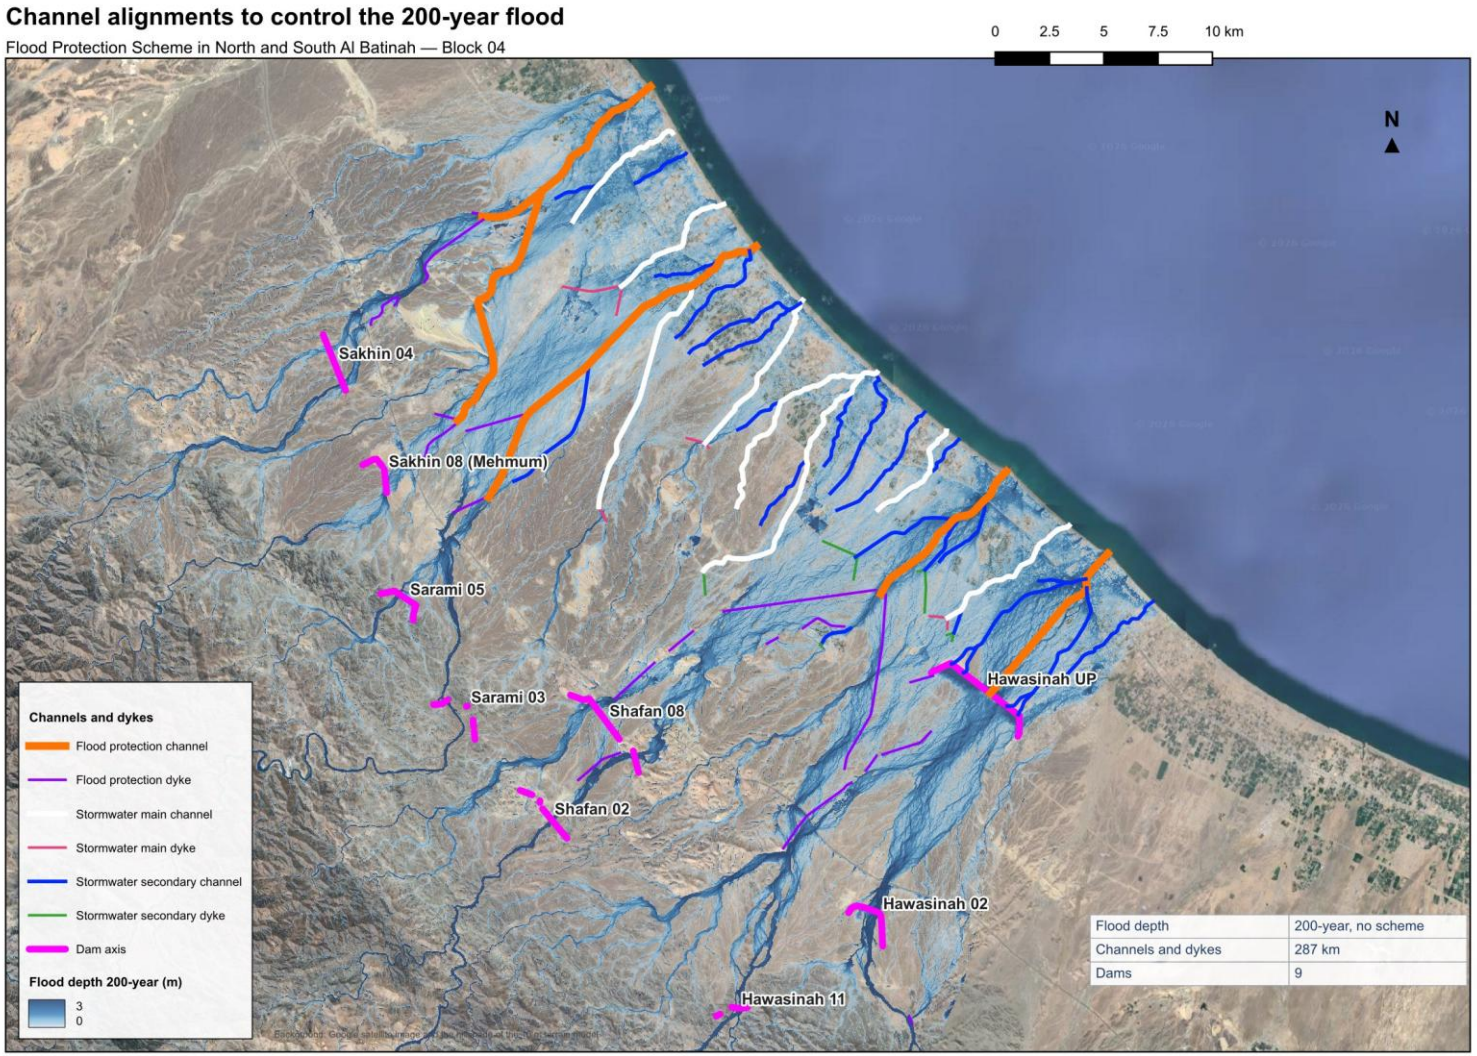


Figure 6 – Channel alignments to control the 200-year flood, on the 200-year flood depth without the scheme

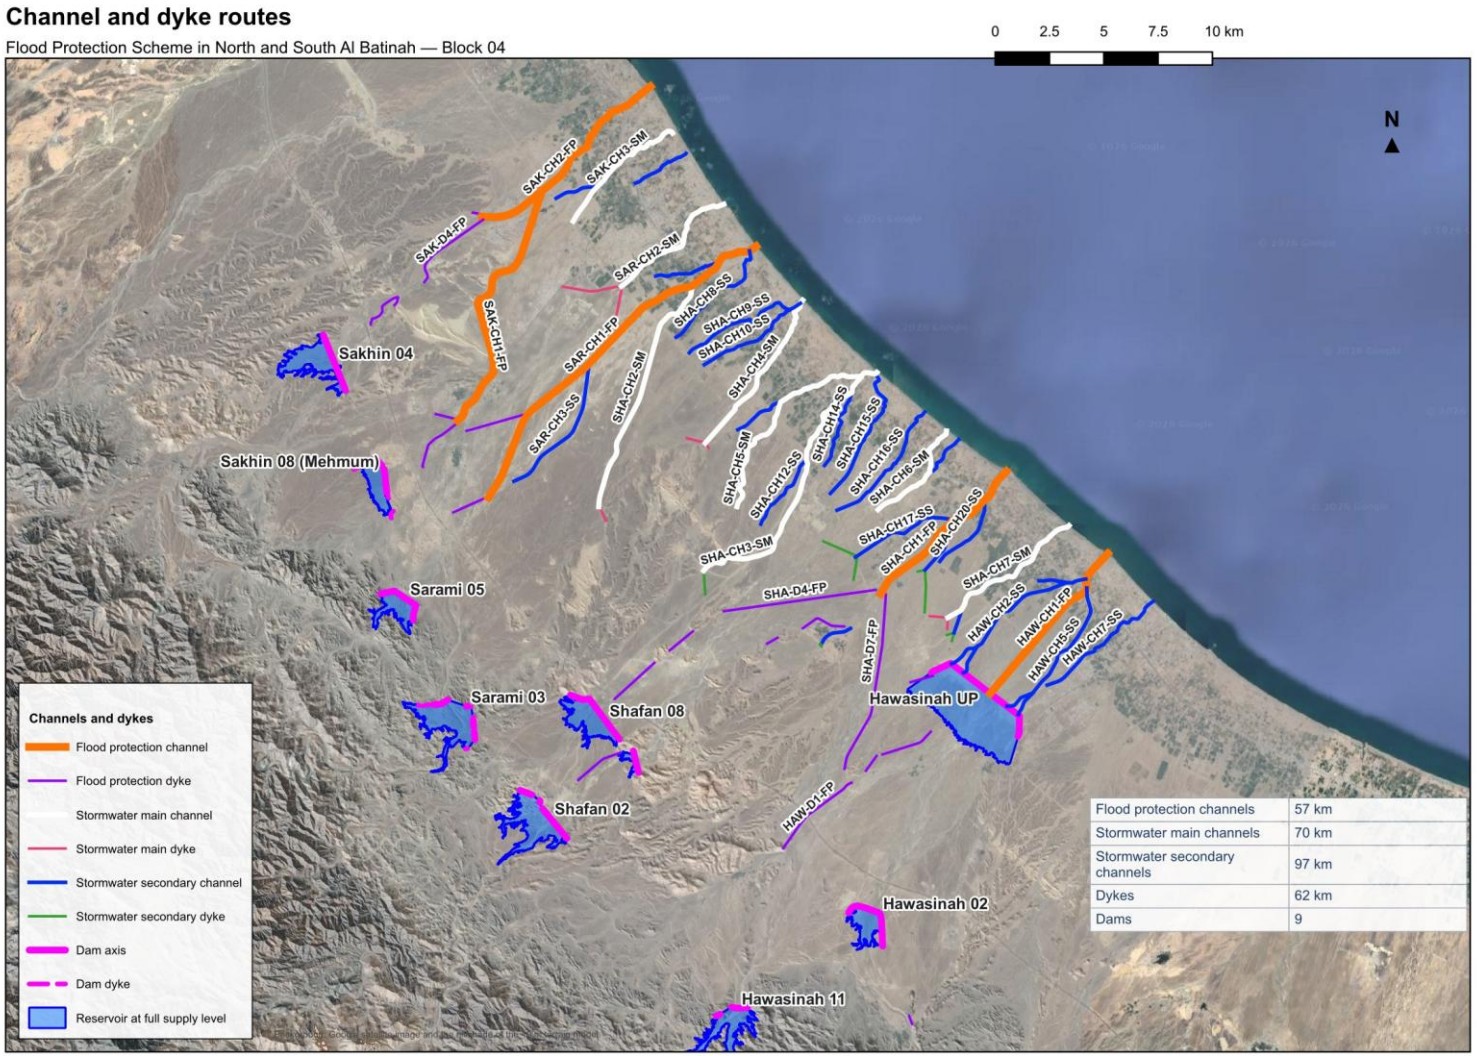


Figure 7 – Channel and dyke routes by category, with the channel and dyke names

4. CHANNEL CONDITION AND CONFLICTS

Several conditions along the routes govern how the channels can be designed: the existing flow patterns, the roads and the utilities that cross or run along the wadis, and the land use. The flood flow pattern depends strongly on the geometry of the plain; where the wadis leave the hills and spread over the flatter ground, the flow widens and loses its defined bed.

The Batinah Expressway, the Batinah Highway, the Batinah Coastal Road, the planned North Batinah bypass and the OQ pipelines are the main constraints (Figure 8). The existing crossings of the roads fix the channel levels and widths where they are kept, and the shallow pipelines limit the depth of the channels that cross them. Other utility corridors, electricity, water, wastewater and stormwater, also have to be respected and their exact position and depth are required for the detailed design.

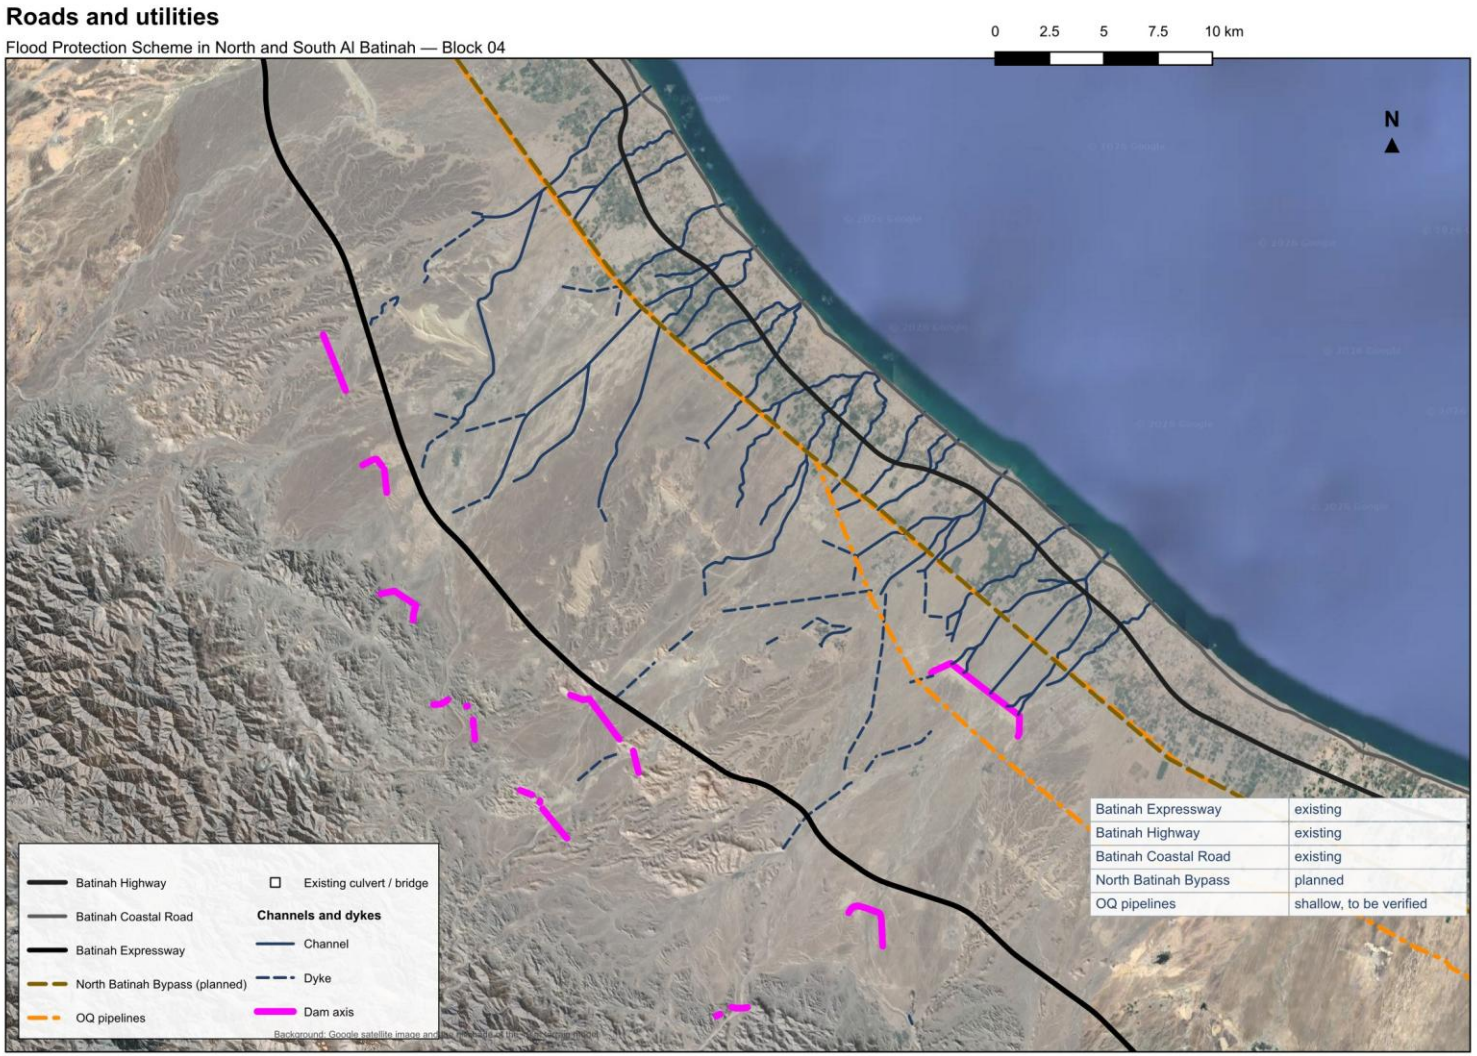


Figure 8 – Roads and utilities

The land use of the plain, managed mainly by the Ministry of Housing and Urban Planning, also shapes the alignments (Figure 9). Houses have been built inside the wadis or have encroached on them and narrowed their beds, and farms extend their boundaries into the wadi. The channels keep to the wadi corridor wherever it is free and deviate around the built plots where it is not.

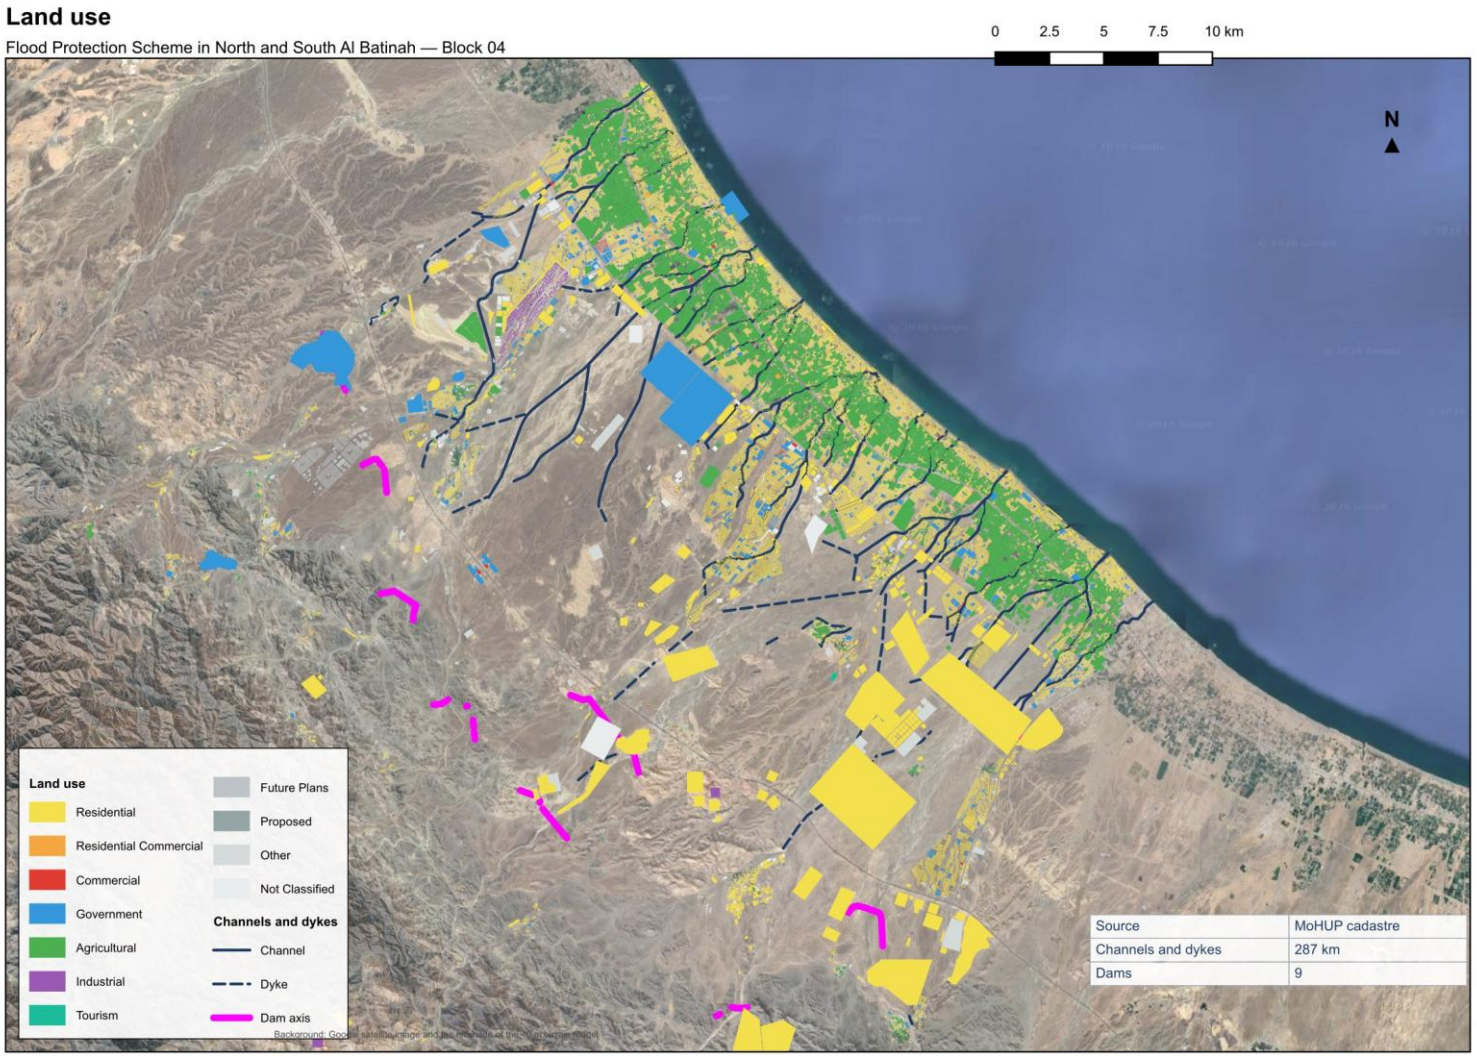


Figure 9 – Land use

5. RAINFALL-RUNOFF SIMULATION

The HEC-HMS model of Block 04 is comprehensive: it includes the subbasins of the nine dams and those of the channel network, delineated on the 10 m terrain model with the channel alignments and the dykes as breaklines, so that even the smallest channel of the design has its own catchment. Depth-area analyses are run for every return period, so that the areal reduction of the storm is applied to each element for its own catchment area. The dams are represented by reservoir elements with their elevation-area curves and spillway ratings, all nine routed in the model so that the flows on the plain carry their attenuation; the reaches are routed by Muskingum-Cunge. Figure 10 shows the model.

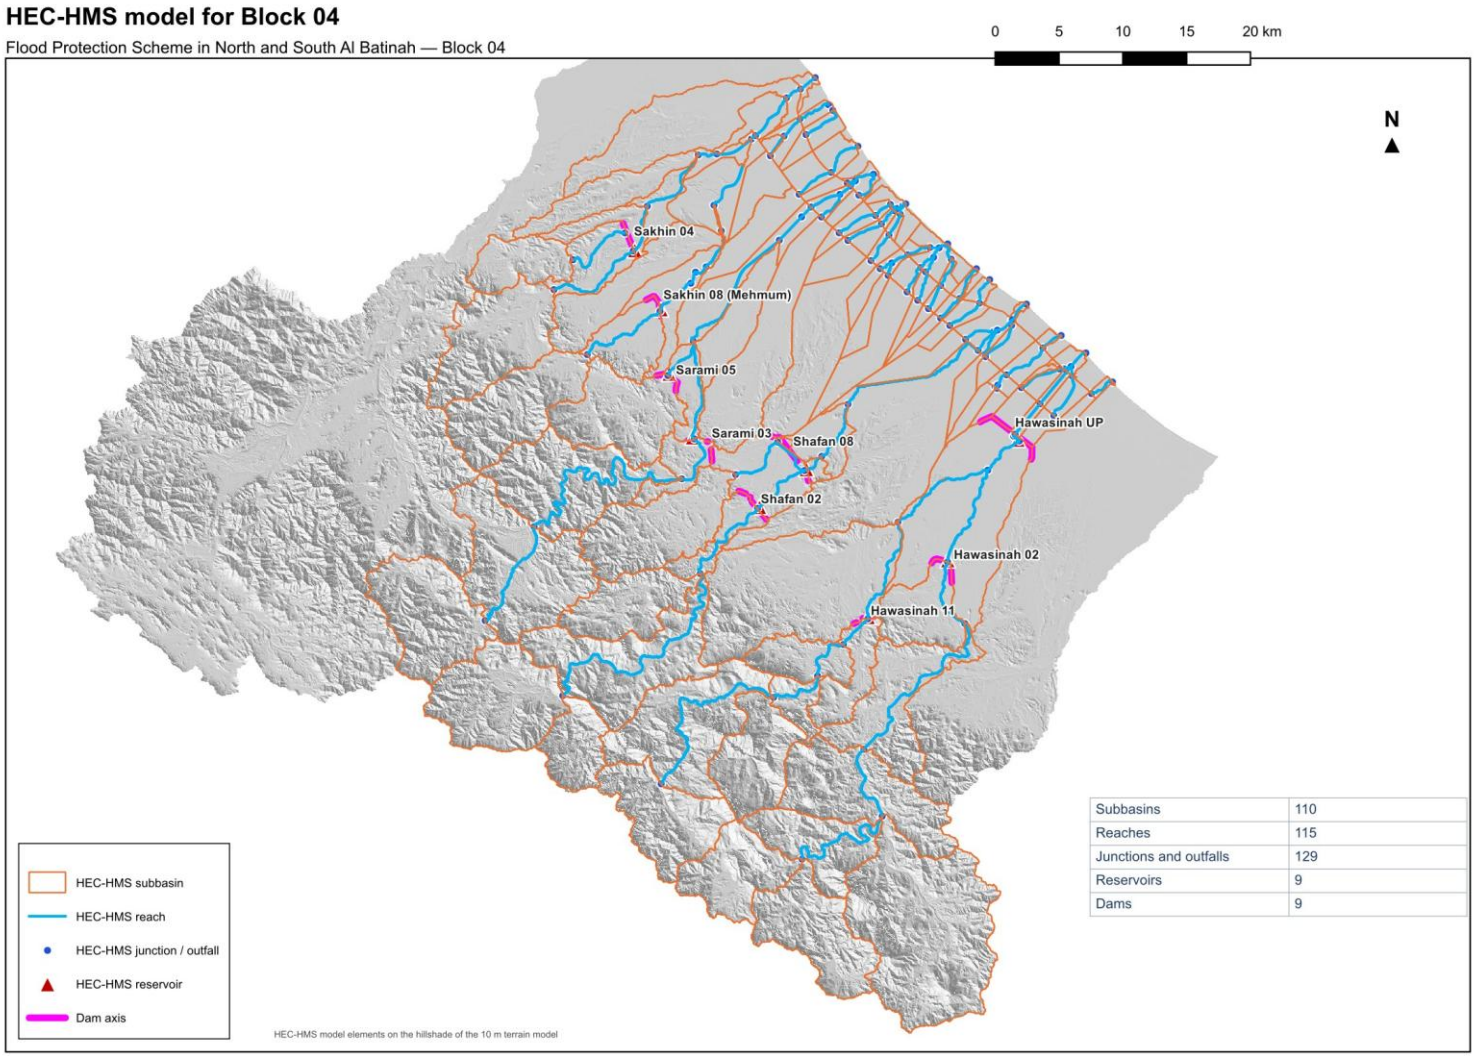


Figure 10 – HEC-HMS model for Block 04

The 200-year peak flow at every junction of the model, with the dams in place, is mapped in Figure 11 for the whole block and in Figure 12 for the dams and the plain downstream of them, where the channels are designed. The peaks at the junctions of the plain are the design flows of the channel reaches that leave them.

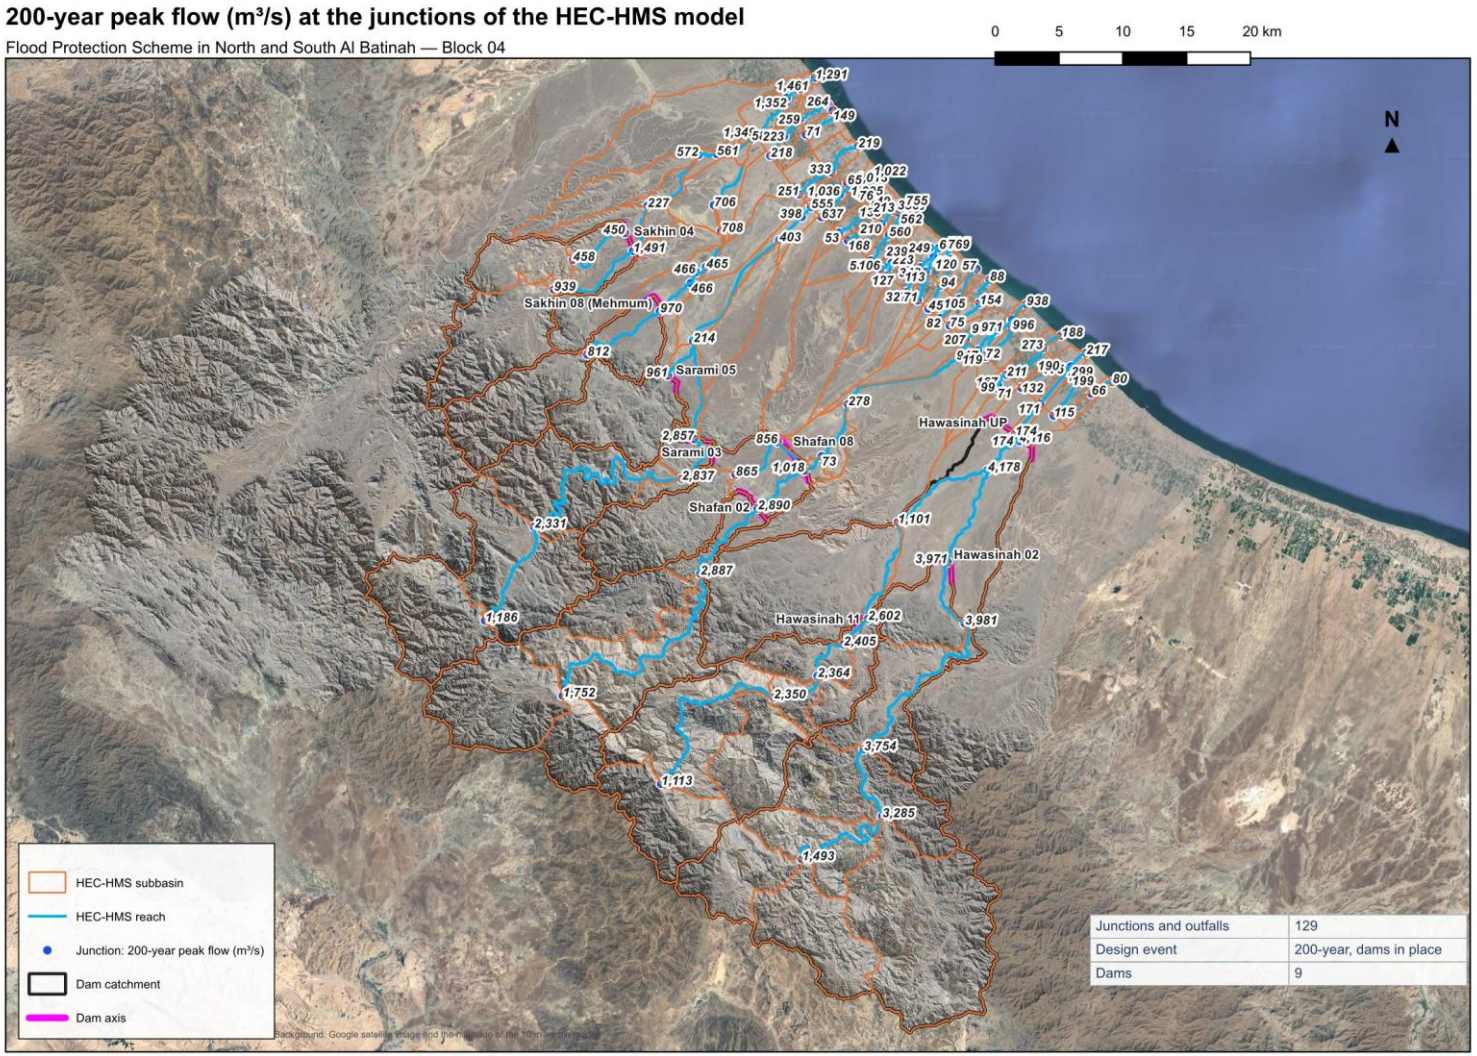


Figure 11 – (a) Q200 (m^3/s) at the junctions of the HEC-HMS model, dams in place

200-year peak flow (m³/s) at the junctions: the dams and the plain

Flood Protection Scheme in North and South Al Batinah — Block 04

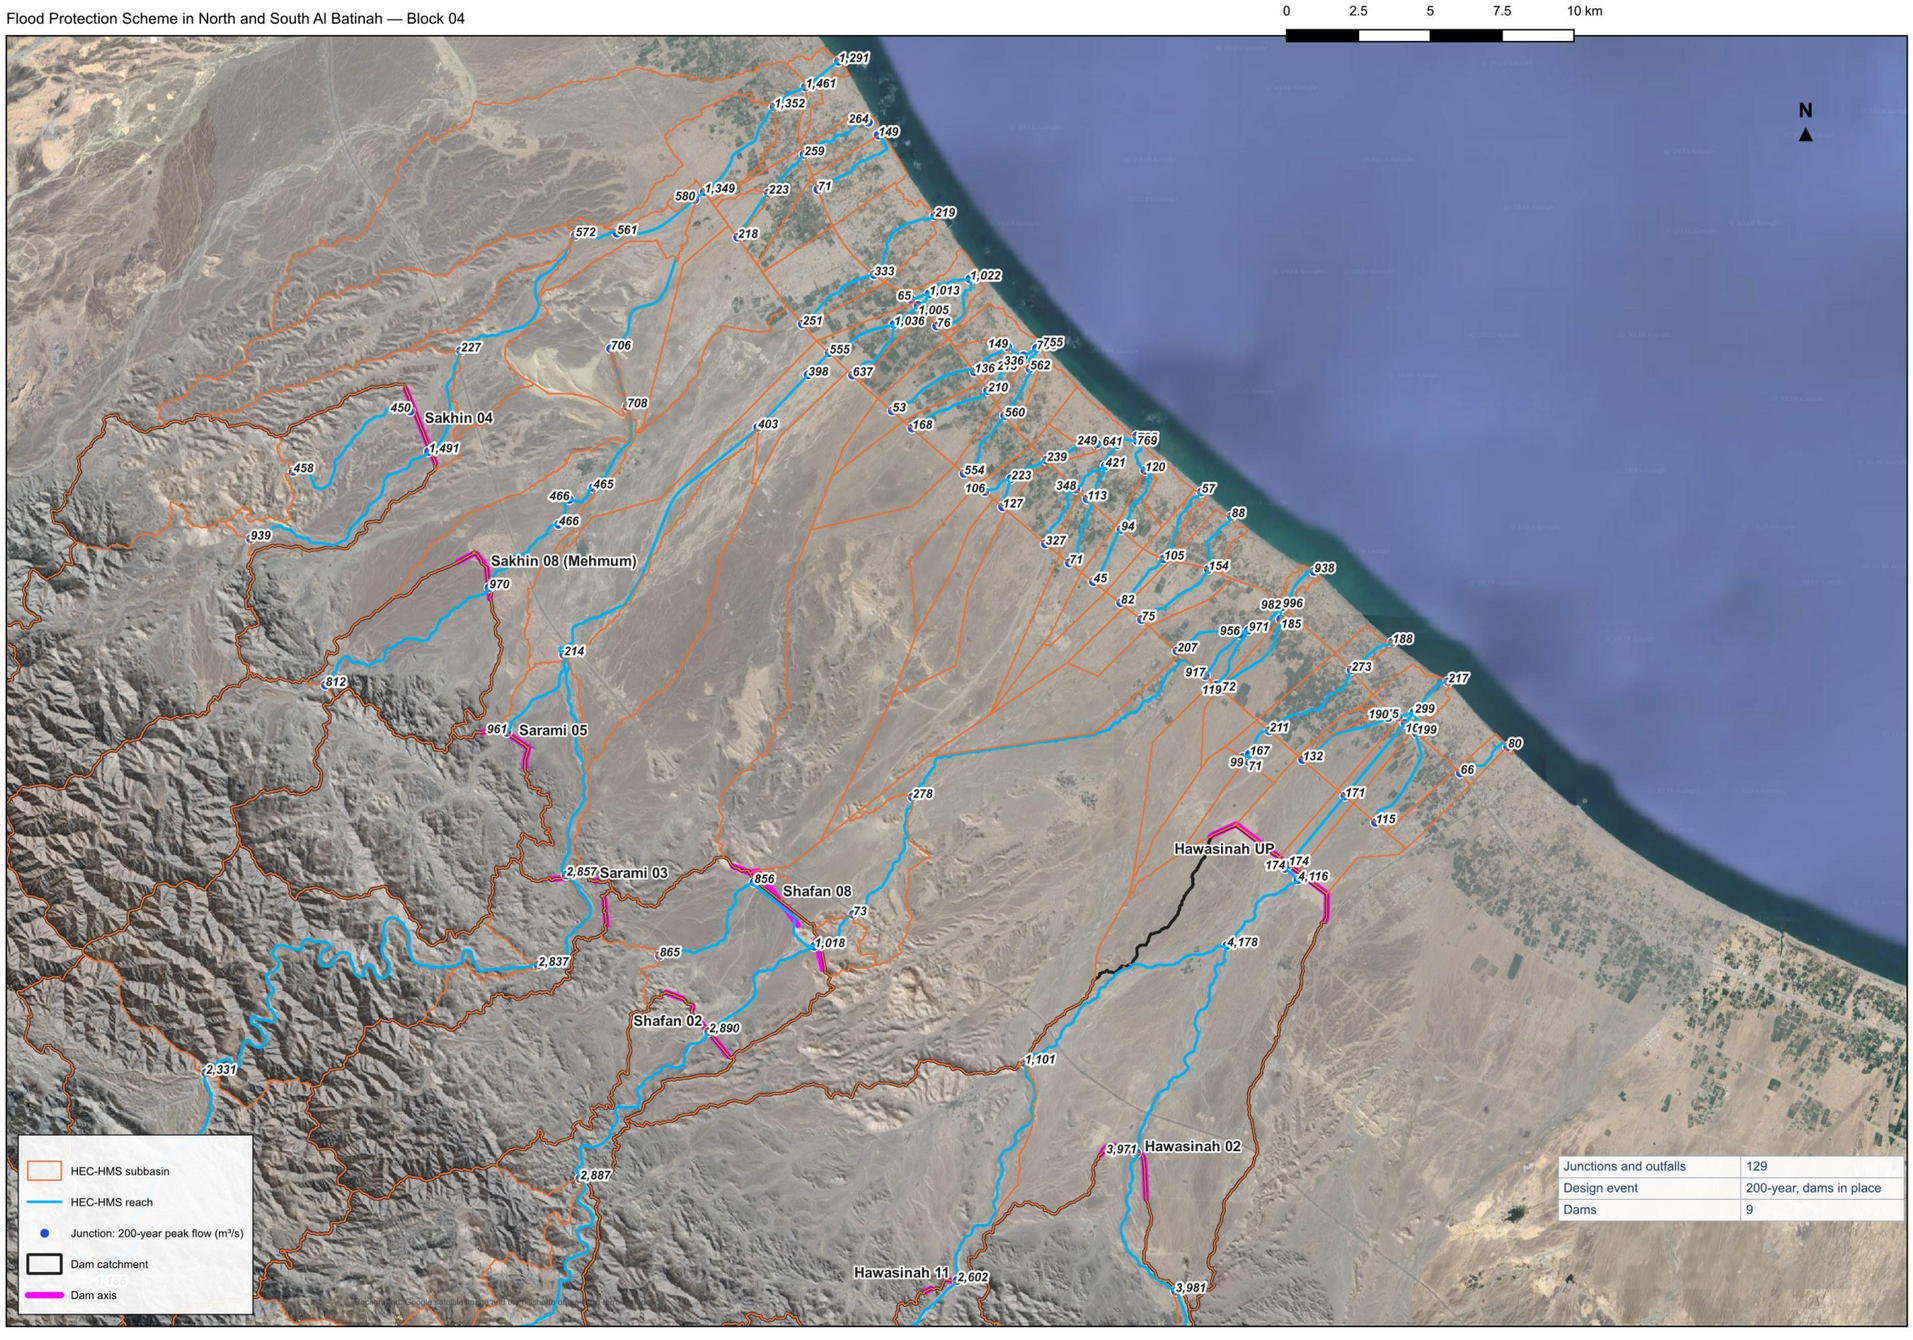


Figure 12 – (b) Q200 (m³/s) at the dams and the junctions downstream of them, dams in place

44 intermediate catchments, 258 km^2 in all, have no dam anywhere in their upstream network: their runoff reaches the channels unregulated (Figure 13). The other 66 catchments, 2,205 km^2, either drain to a dam or receive its routed outflow; their channels are sized on the runoff of the plain added to that outflow.

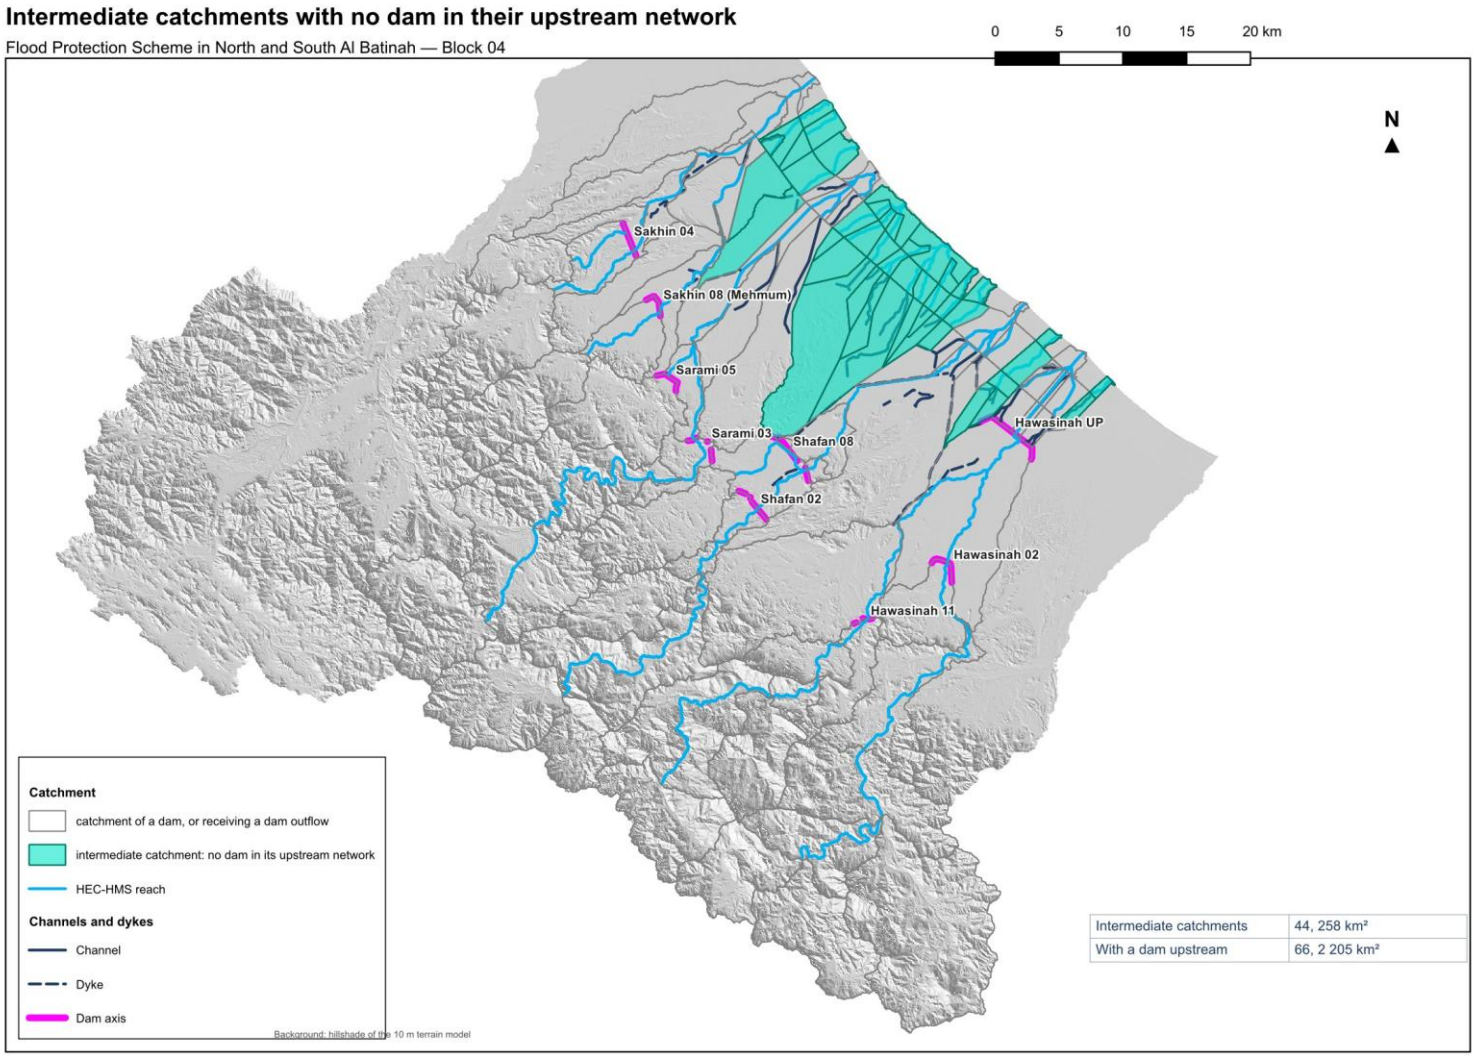


Figure 13 – Intermediate catchments with no dam in their upstream network

Some important points about the catchments of the study area are the following.

- Hawasinah UP, the existing dam on Wadi Al Hawasinah, receives the routed outflows of Hawasinah 02 and Hawasinah 11 upstream of it, and Shafan 08 receives the routed outflow of Shafan 02.
- Wadi Sarami and Wadi Sakhin each carry two dams on separate tributaries; their channels join on the plain before the sea.
- The intermediate catchments of the plain, below the dams, have no upstream storage; their flood-protection and stormwater channels are sized on their own runoff added to the routed dam outflows.

5.1. DAMS' INFORMATION

The nine dams sit at the foot of the hills where the wadis leave their gorges. Their characteristics are listed in Table 5: crest level, full supply level, height above the wadi bed, reservoir capacity at full supply level, spillway length, probable maximum flood and dam length.

Table 5 – Dams' information

Dam	Crest level (m)	FSL (m)	Height crest–bed (m)	Capacity at FSL (Mm^3)	Spillway length (m)	QPMF (m^3/s)	Dam length (m)
Hawasinah 02	149	144	19.5	11	759	17,809	3,159
Hawasinah 11	256	251	40.0	34	501	11,767	947
Hawasinah UP	65	60	21.5	81	1,481	34,783	9,771
Shafan 02	240	235	38.0	43	472	11,086	2,431
Shafan 08	173	168	20.0	15	671	15,764	4,264
Sarami 03	242	237	45.5	45	479	11,254	1,476
Sarami 05	189	184	26.0	15	166	3,888	2,540
Sakhin 04	127	122	25.0	24	315	7,393	2,768
Sakhin 08 (Mehmum)	144	139	17.5	8	209	4,912	2,048

The dam catchments are listed in Table 6 with their physiographic characteristics. Together the dams control 1,640 km^2, the nested catchments counted once. Hawasinah UP drains the largest area, 852 km^2, which includes the catchments of Hawasinah 02 and 11 upstream of it, and Shafan 08 includes that of Shafan 02. The longest flow paths run 15 to 80 km from the mountain divides to the dams, with 10–85 slopes of 0.8 to 2.8 %, and the times of concentration by Kirpich range from two to eleven hours.

Table 6 – Dam catchments

Dam	Area (km^2)	Longest flow path length (km)	Longest flow path slope (10–85)	Basin slope	Tc (min)	Lag (min)	Curve number	Relief (m)
Hawasinah 02	420	66.2	0.0108	0.570	566	340	90.2	1,681
Hawasinah 11	226	45.7	0.0185	0.579	346	208	90.5	1,596
Hawasinah UP	852	79.7	0.0100	0.472	672	404	89.4	1,766
Shafan 02	224	49.8	0.0145	0.620	406	243	90.2	1,291
Shafan 08	314	55.4	0.0137	0.538	451	270	89.4	1,334
Sarami 03	228	57.1	0.0134	0.636	465	279	90.1	1,311
Sarami 05	54	14.9	0.0284	0.390	124	74	87.7	910
Sakhin 04	110	28.7	0.0167	0.361	252	151	87.7	1,027
Sakhin 08 (Mehmum)	81	31.7	0.0188	0.502	260	156	88.8	985

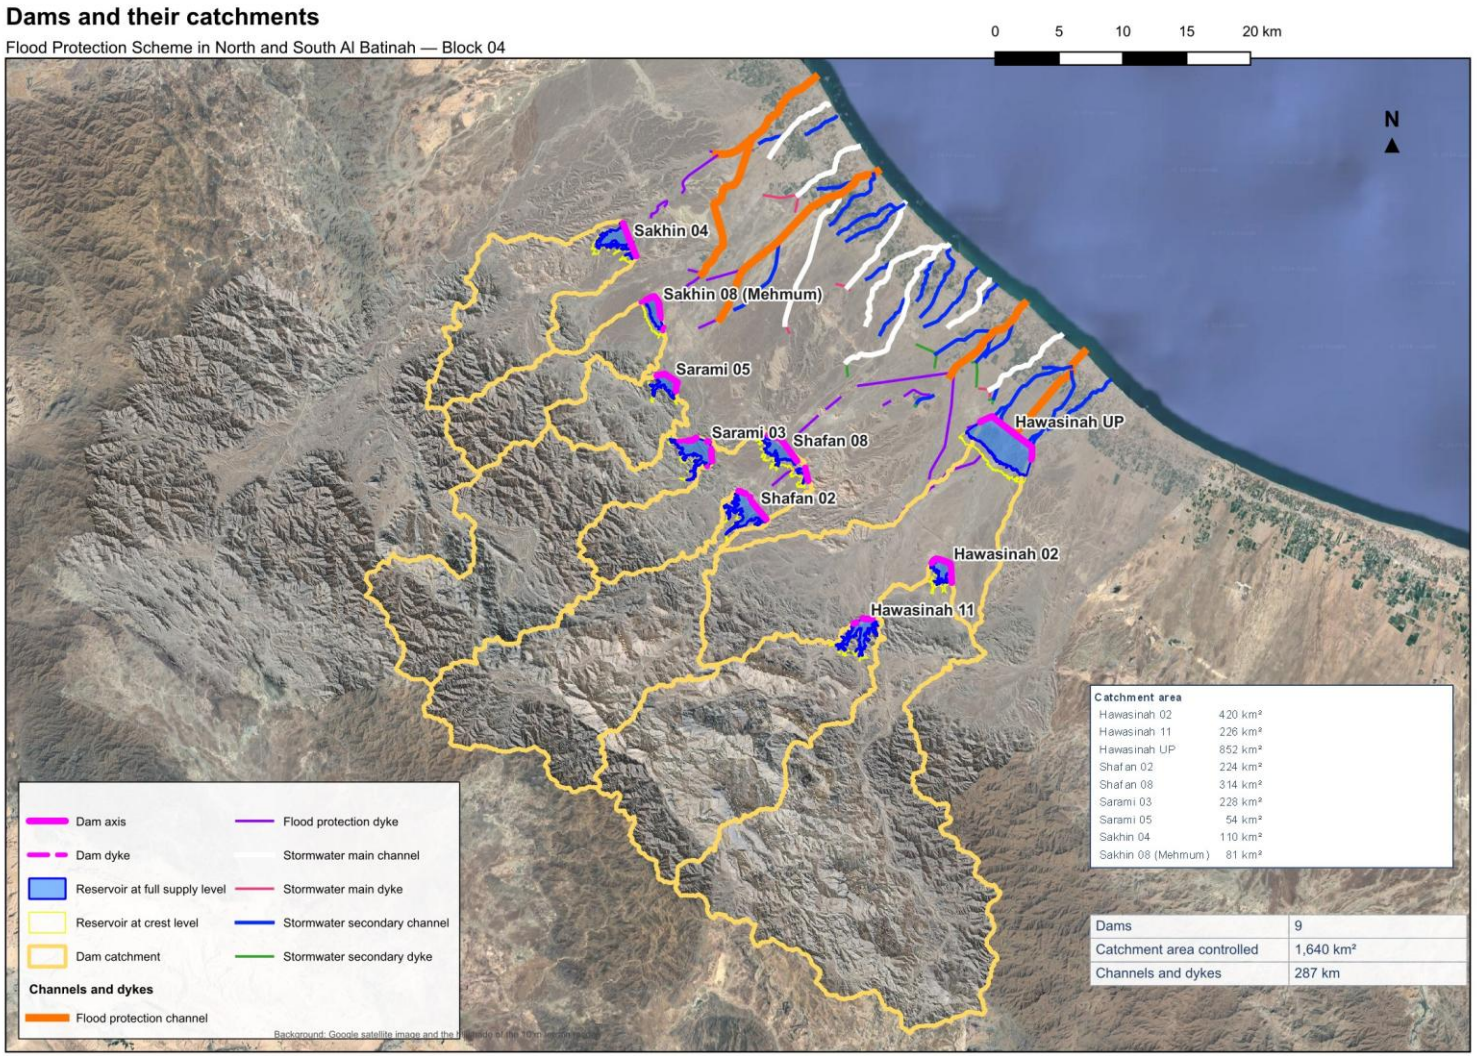



Figure 14 – The nine dams of Block 04, their catchments and reservoirs, and the channel and dyke alignments of the plain

5.2. DAMS' ELEVATION-VOLUME-AREA CURVES


The reservoir elevation-area-volume curves are derived from the 10 m terrain model inside the crest-level contour of each dam, at 0.5 m steps from the wadi bed to the crest; the volume between steps follows the conic formula. Table 7 gives the curves of the nine reservoirs with the full supply level and the capacity and area at it, and Table 8 summarises the values at full supply level and at crest.

Table 7 – Dams' elevation-volume-area curves


Hawasinah 02

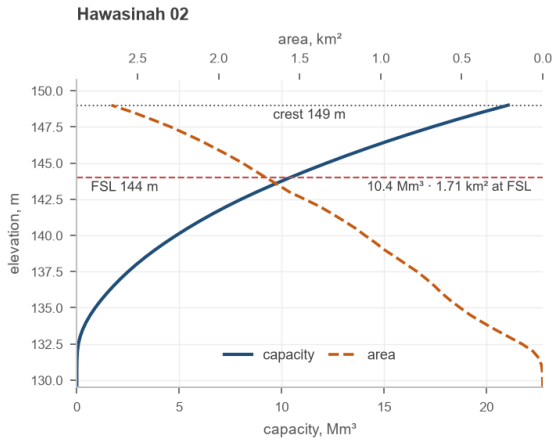


Hawasinah 11

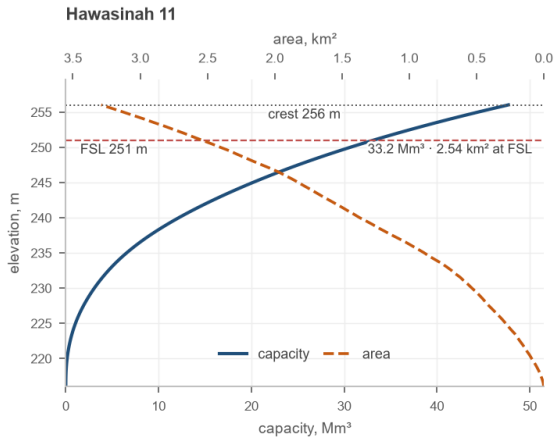


Hawasinah UP

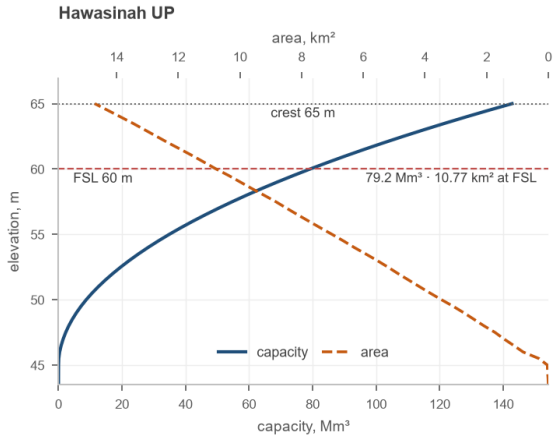


Shafan 02

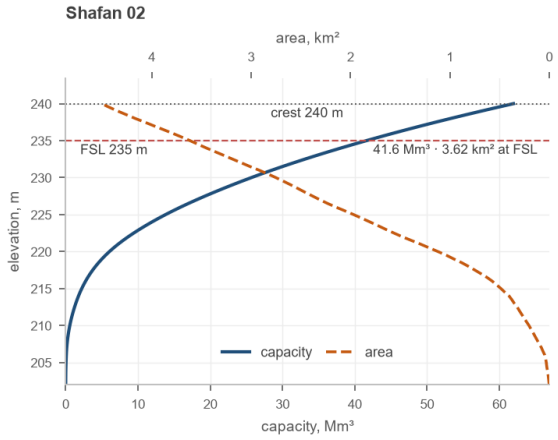


Shafan 08

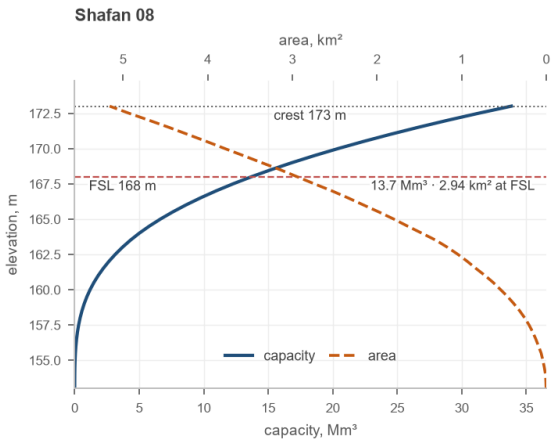


Sarami 03

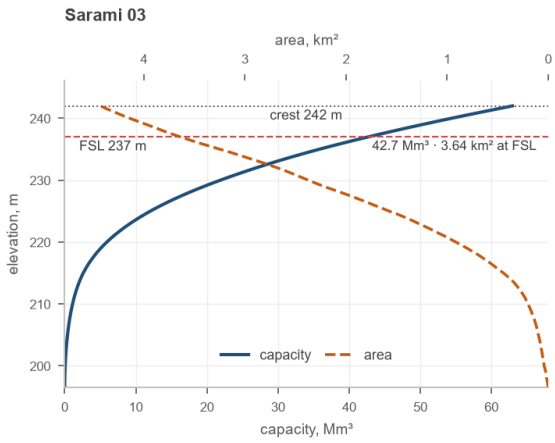

Sarami 05

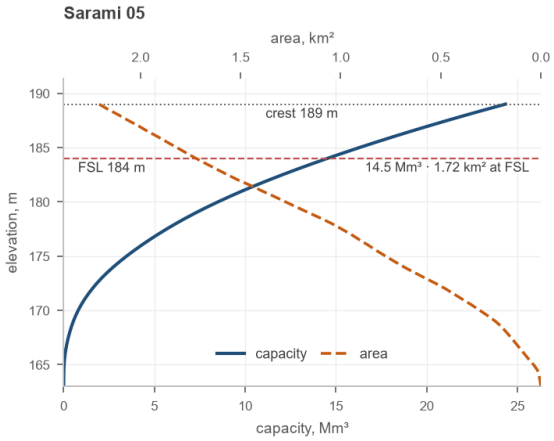

Sakhin 04

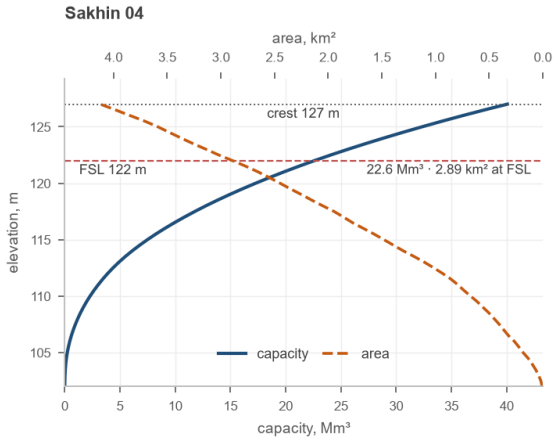

Sakhin 08 (Mehmum)

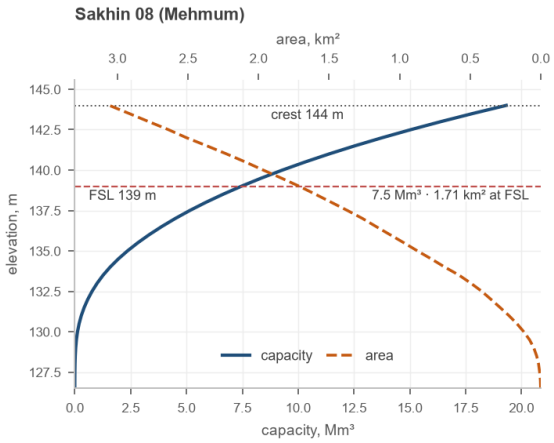


Table 8 – Reservoir curves at full supply level and at crest

Dam	Bed (m)	Area at FSL (km^2)	Volume at FSL (Mm^3)	Area at crest (km^2)	Volume at crest (Mm^3)
Hawasinah 02	129.5	1.71	10.4	2.66	21.1
Hawasinah 11	216.0	2.54	33.2	3.29	47.7
Hawasinah UP	43.5	10.77	79.2	14.71	142.8
Shafan 02	202.0	3.62	41.6	4.51	61.9
Shafan 08	153.0	2.94	13.7	5.16	33.8
Sarami 03	196.5	3.64	42.7	4.43	63.0
Sarami 05	163.0	1.72	14.5	2.21	24.3
Sakhin 04	102.0	2.89	22.6	4.12	40.1
Sakhin 08 (Mehmum)	126.5	1.71	7.5	3.06	19.3

5.3. RESERVOIR ROUTING

Each reservoir is routed by the Modified Puls method on its elevation-area curve. The outflow is the spillway discharge above full supply level, a broad-crested weir with the spillway length of Table 5 and a coefficient of 2.1, plus the flow over the dam crest once the level exceeds it:

$$Q = C\,L\,H^{1.5} + 1.7\,L_{crest}\,(z - z_{crest})^{1.5} \qquad (3)$$

Q: outflow, m^3/s

C: spillway discharge coefficient, 2.1, $m^{0.5}/s$

L: spillway length, m

H: head over the full supply level, m

L_{crest}: length of the dam crest, m

z: reservoir level, m

The reservoirs are empty at the start of every event; a low-level outlet empties them between events and does not change the flood peak.

5.4. DAMS' PEAK FLOWS

Peak inflows and outflows at the dam sites are presented in Table 9 for all the return periods; the dams are designed to hold the 200-year flood. The inflow of Hawasinah UP and of Shafan 08 includes the routed outflow of the dams upstream of them.

Table 9 – Dams' peak flow (m^3/s) for the return periods

Dam		2	5	10	25	50	100	200	500	1000	2000	5000	10000	PMP
Hawasinah 02	In	98	412	1,214	1,801	2,379	3,093	3,971	5,451	6,863	7,821	10,482	11,302	17,809
	Out	0	0	725	1,429	2,143	2,953	3,887	5,369	6,772	7,730	10,371	11,184	17,751
Hawasinah 11	In	99	370	862	1,231	1,591	2,042	2,602	3,539	4,465	5,083	6,917	7,474	11,767
	Out	0	0	0	0	0	15	325	1,404	2,757	4,087	6,400	7,039	11,608
Hawasinah UP	In	23	120	570	1,240	1,975	2,936	4,109	6,016	7,727	10,004	16,546	18,212	34,603
	Out	0	0	0	0	0	0	159	1,618	3,726	6,442	11,984	13,741	32,933
Shafan 02	In	86	319	913	1,348	1,773	2,283	2,890	3,888	4,830	5,416	7,170	7,705	11,086
	Out	0	0	0	0	0	0	0	528	1,398	2,485	4,755	5,447	10,556
Shafan 08	In	30	129	337	494	649	838	1,069	1,454	1,821	2,831	5,575	6,430	14,778
	Out	0	0	0	0	0	0	72	494	1,386	2,582	5,117	5,920	14,380
Sarami 03	In	77	347	954	1,359	1,763	2,259	2,857	3,853	4,796	5,379	7,125	7,655	11,254
	Out	0	0	0	0	0	0	0	485	1,314	2,378	4,632	5,328	10,732
Sarami 05	In	38	141	332	471	603	765	961	1,287	1,595	1,771	2,337	2,509	3,888
	Out	0	0	0	0	0	0	0	0	117	365	994	1,208	3,540
Sakhin 04	In	49	193	495	710	920	1,177	1,491	2,020	2,524	2,841	3,784	4,071	7,393
	Out	0	0	0	0	0	0	0	199	608	1,138	2,277	2,628	6,919
Sakhin 08	In	40	139	333	471	605	768	970	1,307	1,630	1,844	2,453	2,641	4,912
	Out	0	0	0	18	91	241	468	880	1,254	1,563	2,189	2,373	4,681

Four reservoirs store the whole 200-year flood: Shafan 02, Sarami 03, Sarami 05, Sakhin 04 release nothing up to 200 years. Hawasinah UP and Hawasinah 11 release 159 and 325 m^3/s against inflows of 4,109 and 2,602 m^3/s, Shafan 08 releases 72 m^3/s, and Sakhin 08 (Mehmum) halves its 200-year peak. Hawasinah 02 is different: its reservoir holds 11 Mm^3 against a 200-year inflow volume of 72 Mm^3, so the spillway runs from the 10-year event and the 200-year peak passes almost unattenuated, at 3,887 m^3/s; Hawasinah UP downstream of it holds that flood up to the 200-year event.

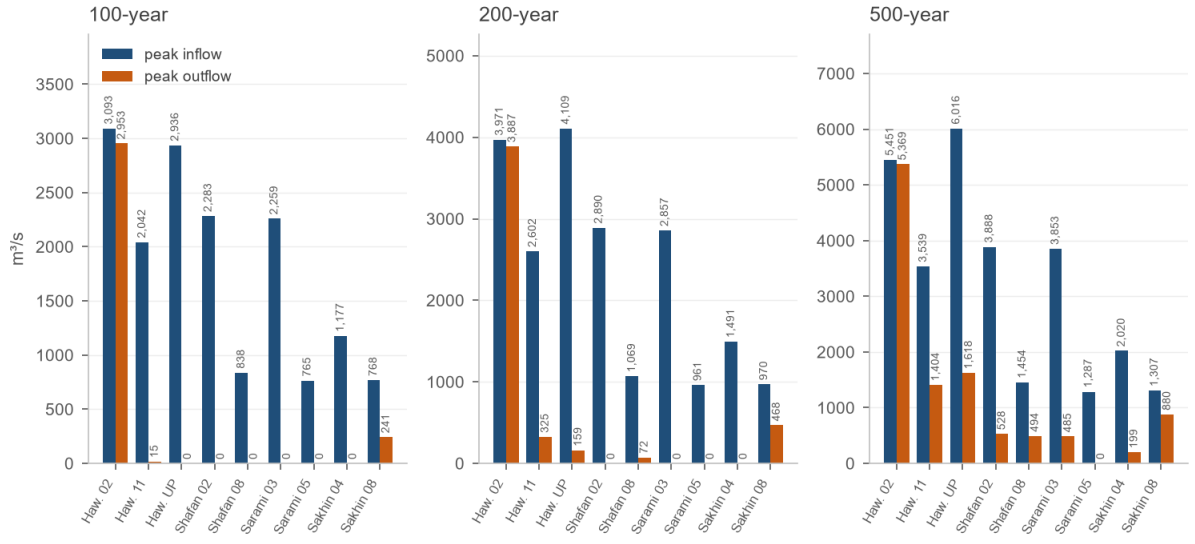


Figure 15 – Dams' peak inflow and outflow for the 100-, 200- and 500-year events

Table 10 – Dams' inflow and outflow volume (Mm^3) for the return periods

Dam		2	5	10	25	50	100	200	500	1000	2000	5000	10000	PMP
Hawasinah 02	In	2.7	9.5	24.5	34.6	44.5	56.6	71.6	96.8	121.0	150.7	200.9	216.3	365.4
	Out	0.0	0.0	14.1	24.2	34.1	46.2	61.2	86.4	110.6	140.2	190.5	205.9	355.0
Hawasinah 11	In	1.8	5.9	14.7	20.6	26.3	33.3	42.0	56.6	70.6	87.7	116.7	125.6	217.7
	Out	0.0	0.0	0.0	0.0	0.0	0.2	8.9	23.4	37.4	54.5	83.5	92.4	184.5
Hawasinah UP	In	0.6	3.0	19.7	32.9	45.8	61.9	82.8	128.6	172.4	226.4	317.7	345.6	681.4
	Out	0.0	0.0	0.0	0.0	0.0	0.0	3.6	49.3	93.2	147.1	238.5	266.4	602.1
Shafan 02	In	1.7	5.7	14.4	20.2	25.9	32.9	41.5	55.9	69.8	86.8	115.6	124.4	212.7
	Out	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.3	28.2	45.2	74.0	82.8	171.1
Shafan 08	In	0.4	1.8	5.0	7.2	9.3	12.0	15.3	33.3	52.1	75.1	114.2	126.1	265.1
	Out	0.0	0.0	0.0	0.0	0.0	0.0	1.6	19.6	38.4	61.4	100.5	112.4	251.4
Sarami 03	In	1.7	5.8	14.5	20.4	26.2	33.3	42.0	56.7	70.7	87.9	117.1	126.0	218.5
	Out	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.0	28.0	45.2	74.4	83.3	175.8
Sarami 05	In	0.4	1.4	3.6	5.1	6.6	8.4	10.7	14.5	18.2	22.7	30.3	32.6	67.7
	Out	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.6	8.1	15.7	18.1	53.2
Sakhin 04	In	0.7	2.6	7.0	10.0	12.9	16.5	21.0	28.5	35.7	44.6	59.6	64.2	138.0
	Out	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.9	13.1	22.0	37.0	41.6	115.4
Sakhin 08	In	0.6	2.1	5.5	7.8	10.0	12.7	16.1	21.8	27.2	33.8	45.1	48.6	97.3
	Out	0.0	0.0	0.0	0.3	2.5	5.3	8.6	14.3	19.7	26.4	37.7	41.1	89.8

5.5. RESERVOIR LEVELS

The peak reservoir level of every event is listed in Table 11. At the probable maximum flood the reservoirs reach 4.7 to 5.0 m above full supply level.

Table 11 – Peak reservoir level (m) for the return periods

Dam	FSL	2	5	10	25	50	100	200	500	1000	2000	5000	10000	PMP
Hawasinah 02	144	137.7	143.5	144.6	144.9	145.2	145.5	145.8	146.2	146.6	146.9	147.5	147.7	149.0
Hawasinah 11	251	227.1	234.2	241.7	245.2	248.1	251.0	251.4	252.2	252.9	253.5	254.3	254.5	256.0
Hawasinah UP	60	46.2	47.9	52.5	54.7	56.4	58.3	60.1	60.6	61.1	61.6	62.5	62.7	64.8
Shafan 02	235	213.7	219.7	225.3	227.9	230.1	232.4	235.0	235.6	236.2	236.8	237.8	238.1	239.8
Shafan 08	168	158.0	161.0	164.0	165.3	166.3	167.4	168.1	168.5	169.0	169.5	170.4	170.6	172.7
Sarami 03	237	212.3	219.8	226.5	229.4	231.7	234.2	236.8	237.6	238.2	238.8	239.8	240.0	241.8
Sarami 05	184	168.1	171.5	175.2	176.9	178.4	179.9	181.6	184.0	184.5	185.0	186.0	186.3	188.7
Sakhin 04	122	106.7	110.5	114.7	116.5	118.1	119.7	121.4	122.4	122.9	123.4	124.3	124.5	126.8
Sakhin 08	139	132.0	134.7	137.7	139.1	139.3	139.7	140.0	140.6	141.0	141.3	141.9	142.1	143.8

5.6. HYDROGRAPHS

The inflow and outflow hydrographs of all the dam sites are presented in Figure 16 for the 200-year event, with the peak and the volume of each. The area between the two curves is the volume the reservoir stores; the delay of the outflow peak and its reduction measure the dam's performance. The inflow hydrographs of all the return periods are given for every dam in Appendix A.

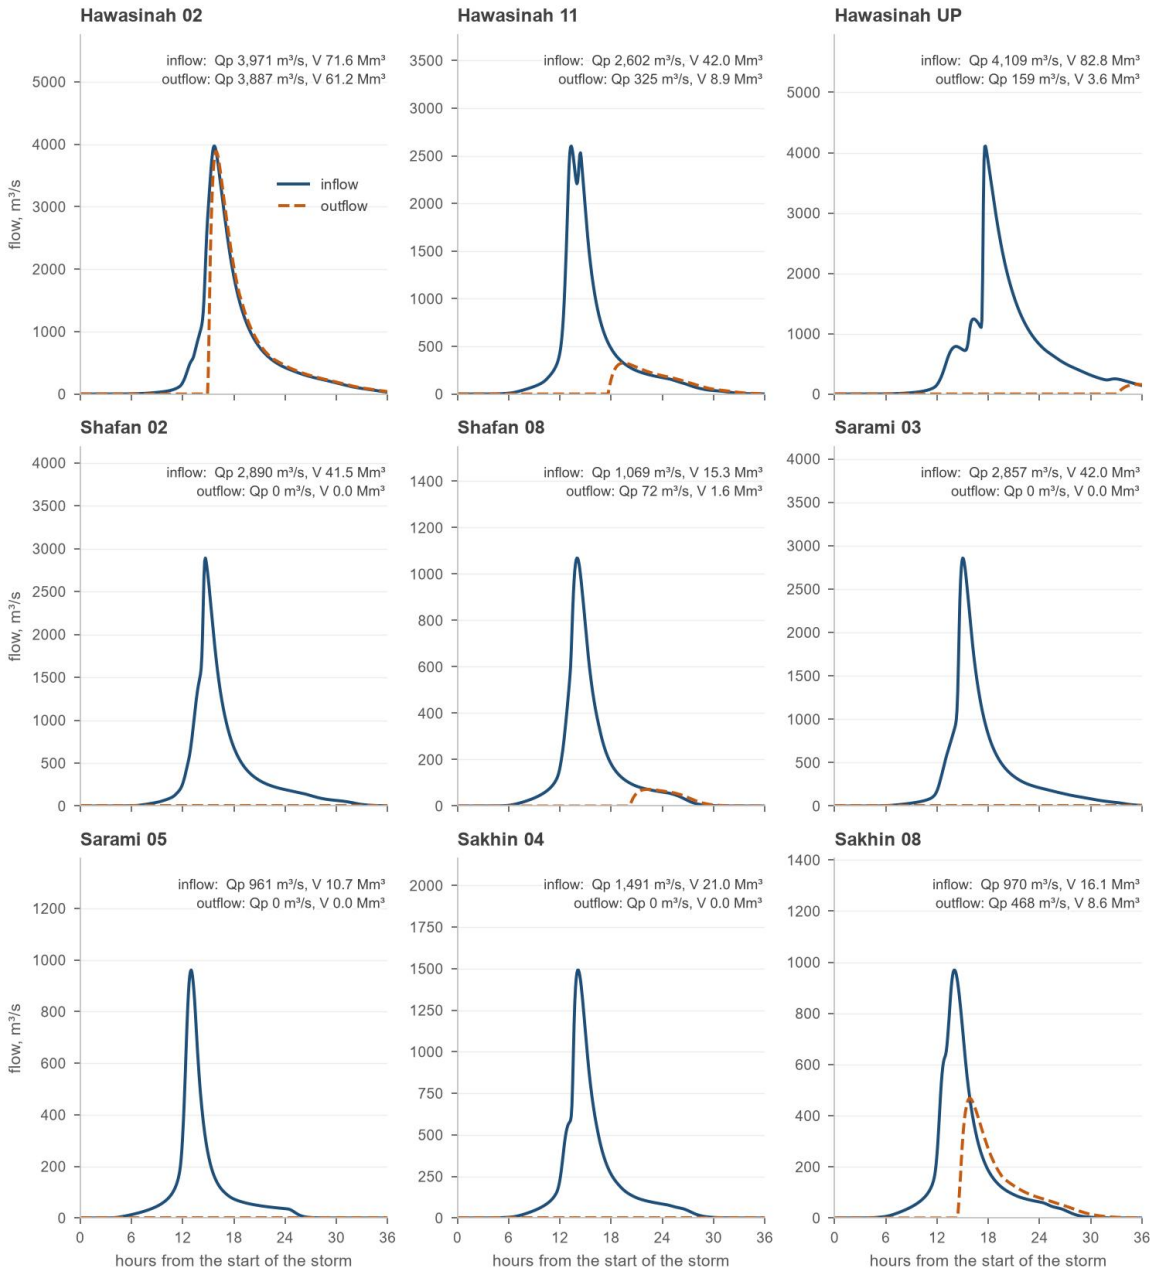


Figure 16 – Inflow and outflow hydrographs of the nine dams for the 200-year event

5.7. FLOOD PROTECTION PERFORMANCE

Table 12 measures the flood protection each dam offers to its global catchment: the potential net capacity is the capacity at full supply level less the sediment deposited in 50 years; the site runoff volume is the 200-year inflow volume at the dam; the global catchment volume is the 200-year runoff volume of the whole wadi catchment reaching the sea without the dams; and the performance is the ratio of the net capacity to that volume.

Table 12 – Flood protection performance of the dams

Dam site	Global catchment	Potential net capacity (MCM)	Site 200-yr runoff volume (MCM)	Global catchment 200-yr runoff volume (MCM)	Global flood protection performance (%)
Hawasinah 02	Al Hawasinah	6.6	71.6	128.6	5
Hawasinah 11	Al Hawasinah	30.7	42.0	128.6	24
Hawasinah UP	Al Hawasinah	72.6	82.8	128.6	56
Shafan 02	Shafan	39.3	41.5	113.2	35
Shafan 08	Shafan	11.0	15.3	113.2	10
Sarami 03	Sarami	40.4	42.0	76.6	53
Sarami 05	Sarami	14.3	10.7	76.6	19
Sakhin 04	Sakhin	22.0	21.0	71.9	31
Sakhin 08 (Mehmum)	Sakhin	6.9	16.1	71.9	10

6. SEDIMENT YIELD AND RESERVOIR SEDIMENTATION

6.1. SOIL LOSS OF THE CATCHMENTS

The soil loss of each catchment is estimated with the Revised Universal Soil Loss Equation on a 250 m grid from public remote-sensing data:[1]

$$A = R\,K\,LS\,C\,P \tag{4}$$

A: mean annual soil loss, t/ha/yr

R: rainfall erosivity, MJ mm/(ha h yr)

K: soil erodibility, t ha h/(ha MJ mm)

LS: slope length and steepness factor, –

C: cover management factor, –

P: support practice factor, 1 (no conservation practice), –

The rainfall erosivity comes from the mean monthly precipitation of the SM2RAIN climatology at 1 km, the soil erodibility from the sand, silt and clay fractions of the SoilGrids topsoil by the Williams relation, the slope factor from the Copernicus 30 m terrain model and its flow accumulation by Moore and Burch, and the cover factor from the vegetation index of a Landsat 8 mosaic. With no conservation practice in the catchments, the support practice factor is 1:

$$R = 1.73 \times 10^{1.5\,(\log P_m - 0.08188)} \tag{5}$$

$$LS = 1.4\left(\frac{FA \cdot 30}{22.13}\right)^{0.4}\left(\frac{\sin\theta}{0.0896}\right)^{1.3}, \quad C = 0.1\,\frac{1 - NDVI}{2} \tag{6}$$

P_m: mean monthly precipitation, mm

FA: flow accumulation, cells of 30 m, capped at 300, –

θ: slope angle, capped at 30°, °

NDVI: normalised difference vegetation index, –

[1] Renard, K.G. et al. (1997), Predicting soil erosion by water: a guide to conservation planning with the Revised Universal Soil Loss Equation (RUSLE), USDA Agriculture Handbook 703.

The catchment means of the factors and of the soil loss are listed in Table 13 and mapped in Figure 17. The soil loss runs from 6.3 t/ha/yr (Sakhin 04) to 13.9 t/ha/yr (Hawasinah 11); the steep mountain catchments carry the highest erosivity and slope factors, the catchments of the foothills the lowest.

Table 13 – RUSLE factors and soil loss, catchment means

Dam	R	K	LS	C	P	Soil loss A (t/ha/yr)
Hawasinah 02	52.4	0.229	19.9	0.0467	1	11.8
Hawasinah 11	56.1	0.230	22.0	0.0467	1	13.9
Hawasinah UP	48.8	0.227	16.9	0.0468	1	10.1
Shafan 02	56.9	0.228	21.4	0.0467	1	13.5
Shafan 08	52.8	0.227	18.3	0.0469	1	11.2
Sarami 03	58.6	0.229	20.7	0.0464	1	13.3
Sarami 05	43.4	0.223	12.9	0.0479	1	6.4
Sakhin 04	43.9	0.225	12.2	0.0468	1	6.3
Sakhin 08 (Mehmum)	49.4	0.228	16.1	0.0472	1	9.7

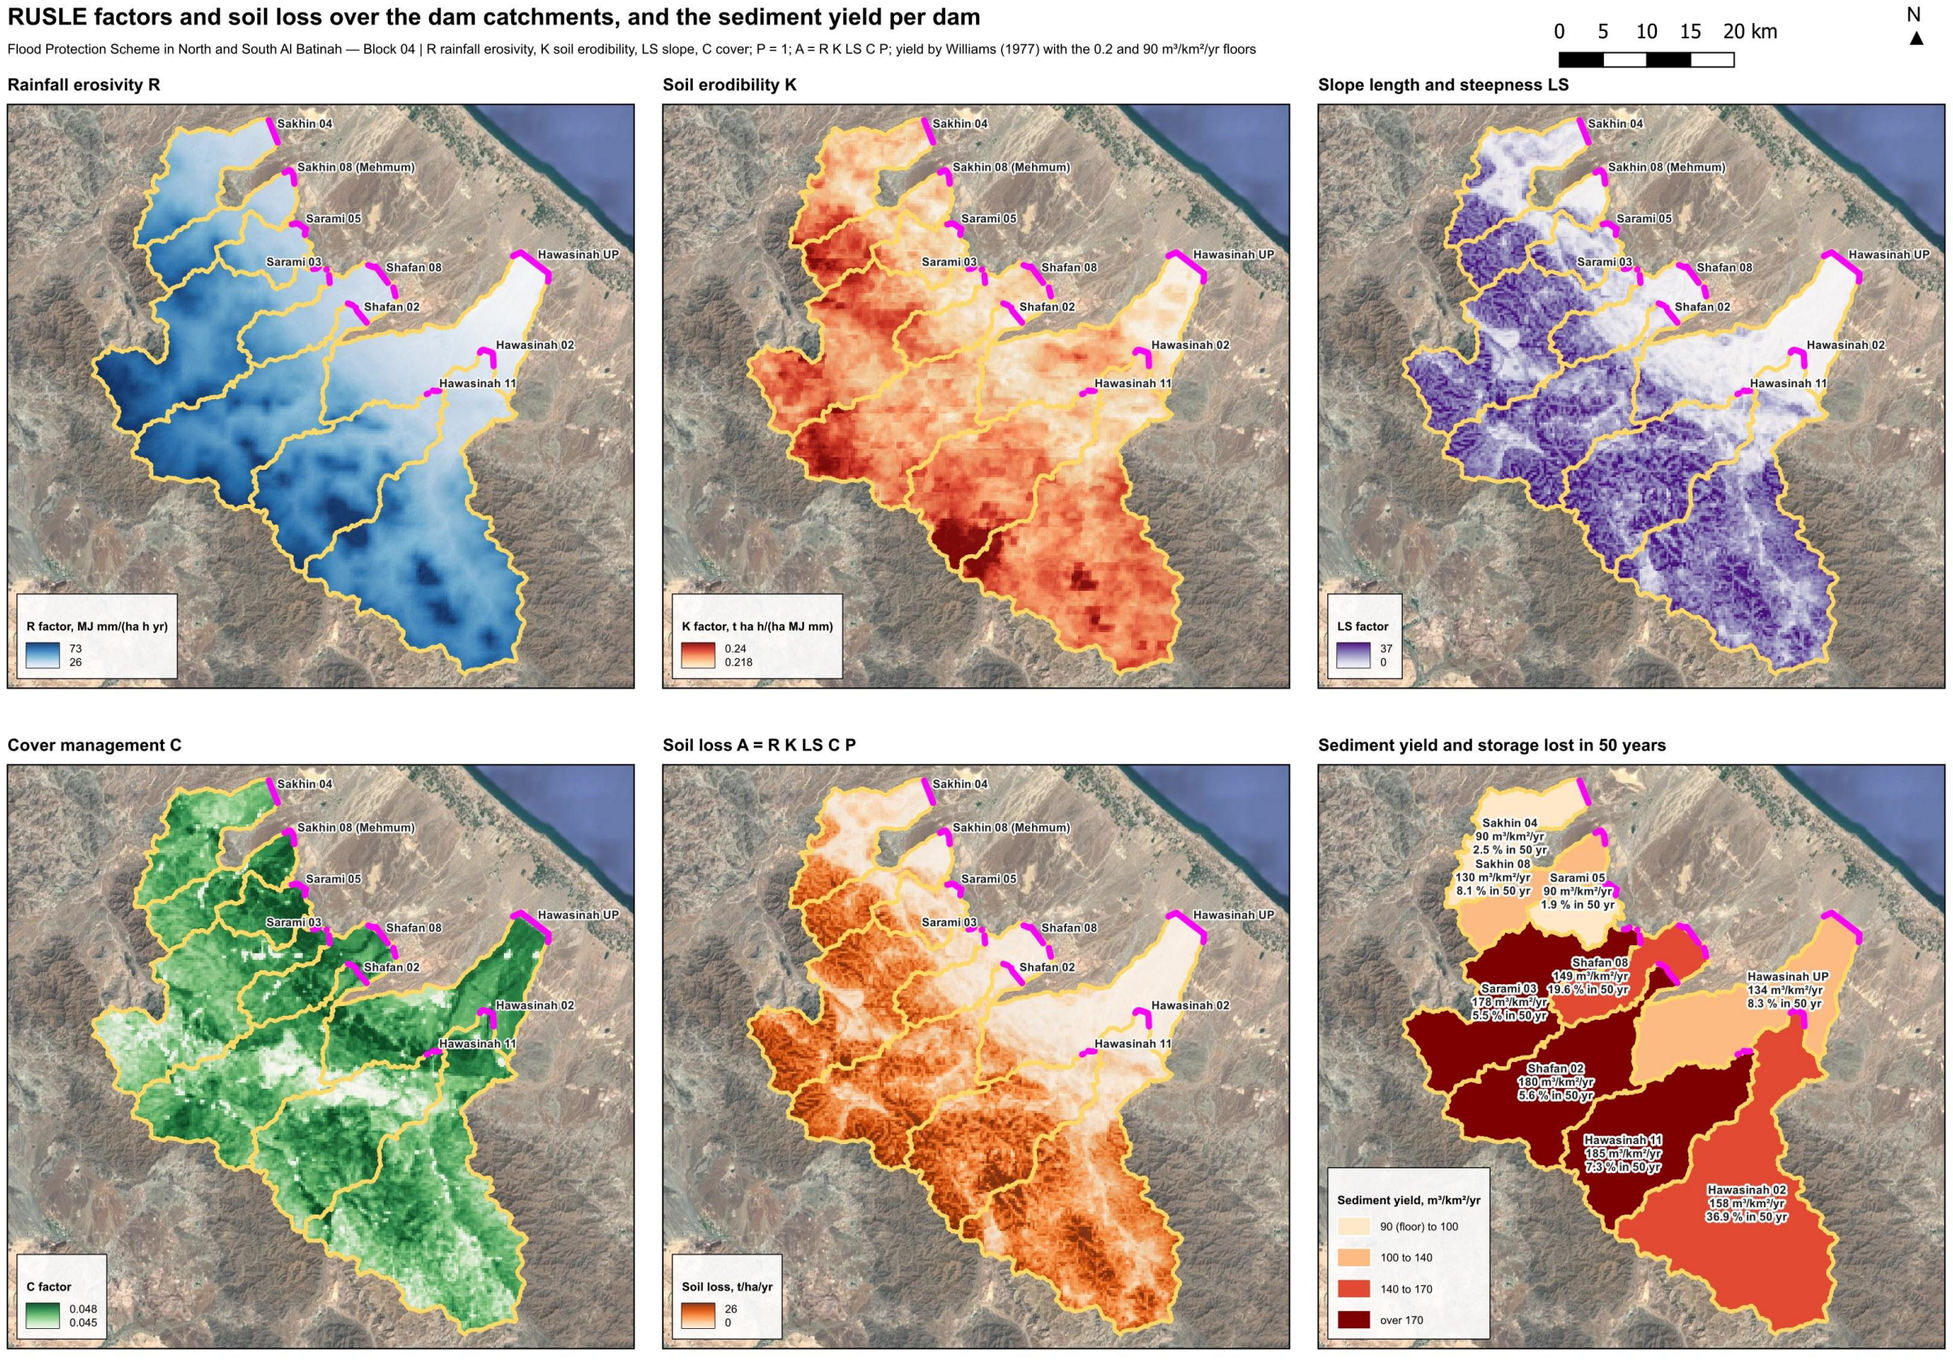


Figure 17 – RUSLE factors and soil loss over the dam catchments, and the sediment yield delivered to each dam

6.2. SEDIMENT DELIVERY AND YIELD

Only part of the eroded soil reaches the dam; the rest settles on the way. The sediment delivery ratio follows Williams (1977) from the catchment area, its relief ratio and its curve number; the relief ratio is the relief of the catchment divided by the longest flow path to the dam:[1]

$$SDR = 1.366 \times 10^{-11} A^{-0.1} RR^{0.363} CN^{5.444} \quad (7)$$

SDR: sediment delivery ratio, –

A: catchment area, km^2

RR: relief ratio, relief / longest flow path, –

CN: area-weighted curve number, –

The equation gives delivery ratios of 0.07 to 0.13 for the catchments of Block 04; a floor of 0.2 is adopted for the design, together with a minimum sediment yield of 90 m^3/km^2/yr, so that the storage lost to sedimentation is not underestimated for the smaller and gentler catchments. Table 14 gives the resulting sediment yield and the sediment delivered to each dam in 50 and 100 years.[2]

[1] Williams, J.R. (1977), Sediment delivery ratios determined with sediment and runoff models, IAHS Publication 122. The delivered mass is converted to a volume at 1.5 t/m^3.

[2] Hawasinah UP and Shafan 08 are assessed on their whole catchment, without credit for the sediment that the reservoirs upstream of them (Hawasinah 02 and 11, Shafan 02) will trap; their sediment loads are therefore upper bounds.

Table 14 – Sediment delivery and yield of the dam catchments

Dam	Area (km^2)	Basin relief ratio	CN	SDR method	SDR value	SDR used (min 0.2)	Sediment density (t/m^3)	Mean soil loss ($m^3/km^2/yr$) with SDR	Yield used ($m^3/km^2/yr$, min 90)	Sediment in 50 yr (Mcm)	Sediment in 100 yr (Mcm)	Tc (min)
Hawasinah 02	420	0.0254	90.2	Williams (1977)	0.087	0.20	1.5	158	158	3.31	6.62	566
Hawasinah 11	226	0.0349	90.5	Williams (1977)	0.105	0.20	1.5	185	185	2.09	4.18	346
Hawasinah UP	852	0.0222	89.4	Williams (1977)	0.073	0.20	1.5	134	134	5.73	11.46	672
Shafan 02	224	0.0259	90.2	Williams (1977)	0.093	0.20	1.5	180	180	2.02	4.03	406
Shafan 08	314	0.0241	89.4	Williams (1977)	0.084	0.20	1.5	149	149	2.34	4.69	451
Sarami 03	228	0.0230	90.1	Williams (1977)	0.088	0.20	1.5	178	178	2.02	4.04	465
Sarami 05	54	0.0609	87.7	Williams (1977)	0.126	0.20	1.5	85	90	0.24	0.48	124
Sakhin 04	110	0.0357	87.7	Williams (1977)	0.096	0.20	1.5	84	90	0.50	0.99	252
Sakhin 08 (Mehmum)	81	0.0311	88.8	Williams (1977)	0.101	0.20	1.5	130	130	0.53	1.05	260

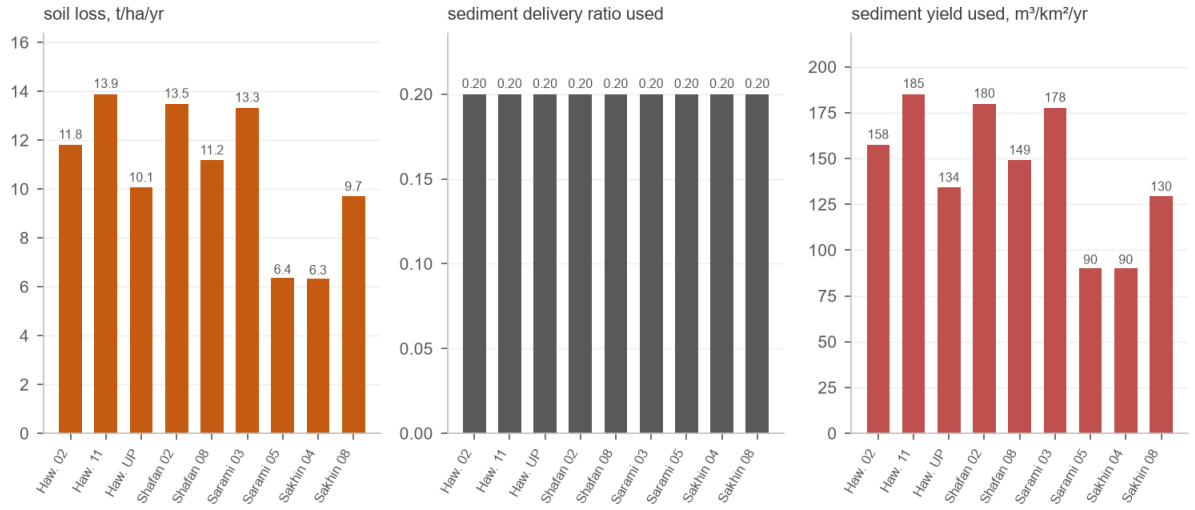


Figure 18 – From soil loss to sediment yield: the catchment mean soil loss, the delivery ratio used and the yield delivered to each dam

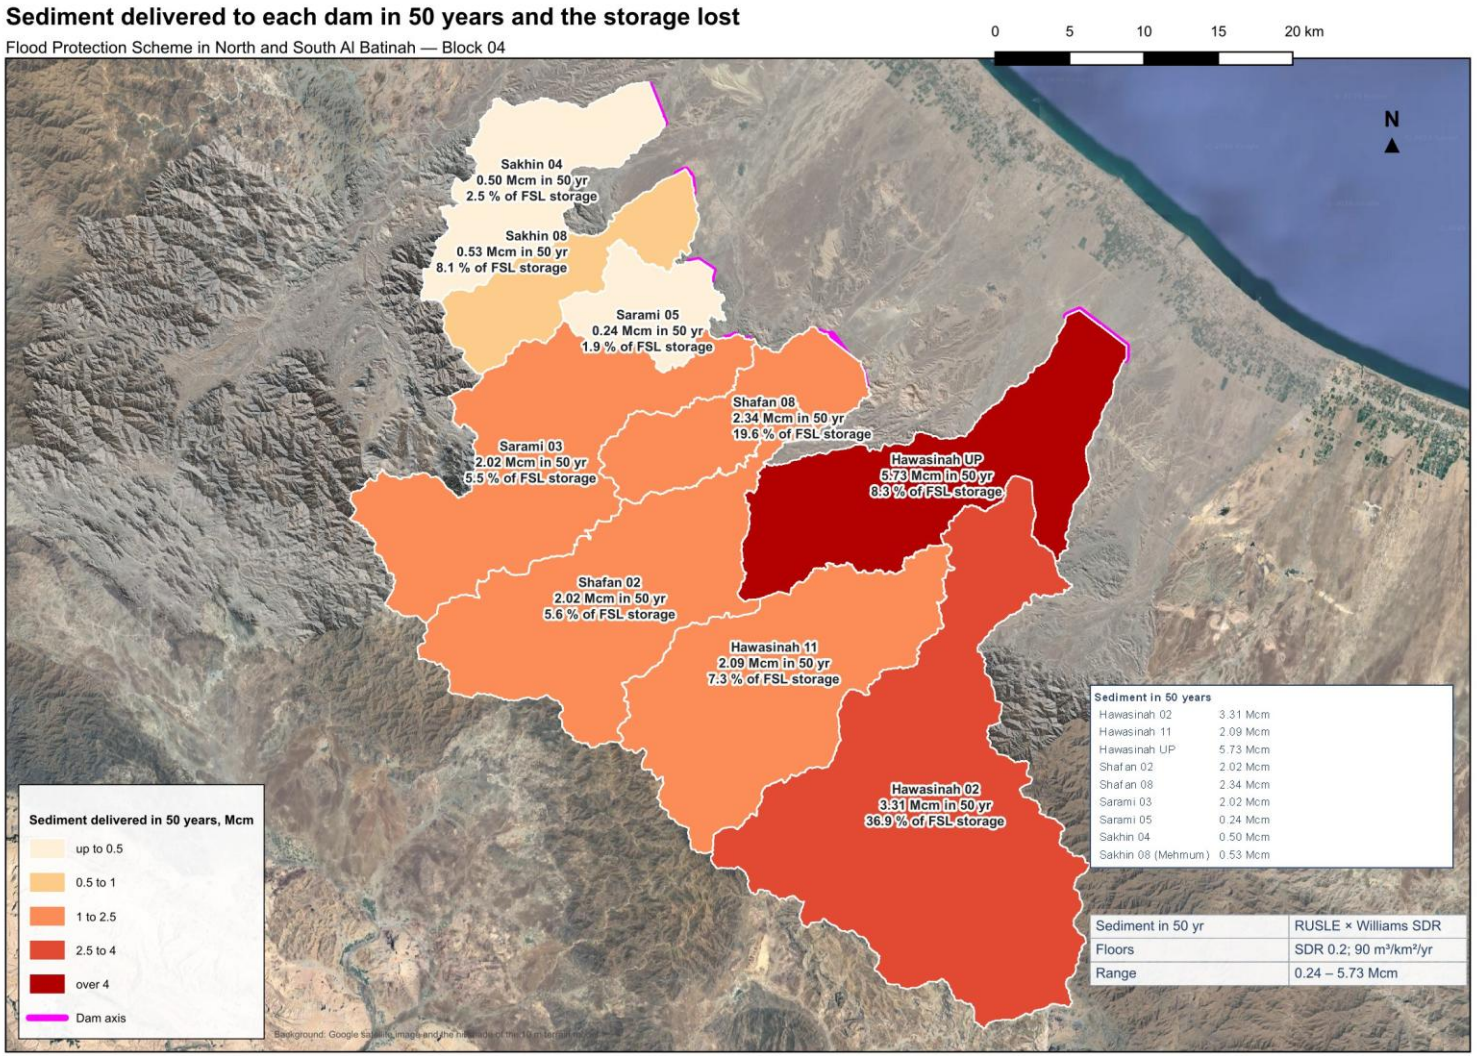


Figure 19 – Sediment delivered to each dam in 50 years (Mcm) and the storage lost at full supply level

6.3. RESERVOIR VOLUME REDUCTION

The storage each reservoir loses to the deposited sediment, and its elevation-area-volume curve after 50 and 100 years, follow Chapter 2, Section 2.6 of the USBR Erosion and Sedimentation Manual. The three components are the reservoir sediment trap efficiency (§2.6.1), the density of the deposited sediment (§2.6.2) and the distribution of the sediment within the reservoir by the Empirical Area-Reduction Method (§2.6.3).[1]

6.3.1. Reservoir sediment trap efficiency

The trap efficiency is the fraction of the inflowing sediment retained in the reservoir. For large storage reservoirs the manual recommends Brune's median curve, in which the efficiency is a function of the ratio of the reservoir capacity to the mean annual inflow. The reservoirs of Block 04 are large relative to their sediment supply and a trap efficiency of 100 % is adopted, a conservative assumption for the storage loss. The volume of sediment retained over the design horizon is:

$$S = q_s A_c T \eta \qquad (8)$$

S: sediment volume retained, m^3

q_s: specific sediment yield of Table 14, $m^3/km^2/yr$

A_c: catchment area, km^2

T: design horizon, 50 and 100 years, years

η: trap efficiency, 1.0, –

6.3.2. Density of deposited sediment

The deposited dry unit weight characterises the deposit and converts the sediment mass to the volume it occupies in the reservoir. The initial unit weight is given by Lara and Pemberton from the clay, silt and sand fractions of the incoming sediment and the reservoir operation; the reservoirs of Block 04 are flood-protection reservoirs that stand empty between floods (operation 3, reservoir normally empty), for which the deposit does not compact with time and the unit weight after T years equals the initial one:

[1] U.S. Bureau of Reclamation (2006), Erosion and Sedimentation Manual, Chapter 2, Section 2.6: Brune (1953); Lara and Pemberton (1965); Miller (1953); Borland and Miller (1960); Lara (1962).

$$W_1 = W_c\, p_c + W_m\, p_m + W_s\, p_s \quad (9)$$

$$W_T = W_1 + 0.4343\, K \left(\frac{T}{T-1} \ln T - 1\right) \quad (10)$$

W_1: initial dry unit weight, kg/m^3

W_c, W_m, W_s: clay, silt and sand coefficients for operation 3: 641, 1 150, 1 550, kg/m^3

p_c, p_m, p_s: clay, silt and sand fractions of the incoming sediment, –

W_T: average unit weight after T years, kg/m^3

K: compaction constant, 0 for operation 3, –

The sediment yield of Table 14 is expressed as a volume at 1.5 t/m^3; the deposited volume is rescaled to the deposited unit weight, V_dep = V_trap × 1 500 / W_T. The catchment topsoil texture is taken from the ISRIC SoilGrids clay, silt and sand contents averaged over each catchment.

6.3.3. Sediment distribution: Empirical Area-Reduction Method

The deposited sediment is distributed by depth with the Empirical Area-Reduction Method. The reservoir is assigned one of four standard types from the shape factor m, the slope of the logarithm of capacity against the logarithm of depth of the original curve, and each type has a relative sediment-area design curve:

$$a(p) = C\, p^A\, (1 - p)^B \quad (11)$$

$a(p)$: relative sediment area, –

p: relative depth from the reservoir bed (0) to full supply level (1), –

C, A, B: type coefficients: type II 2.487, 0.57, 0.41; type III 16.967, 1.15, 2.32, –

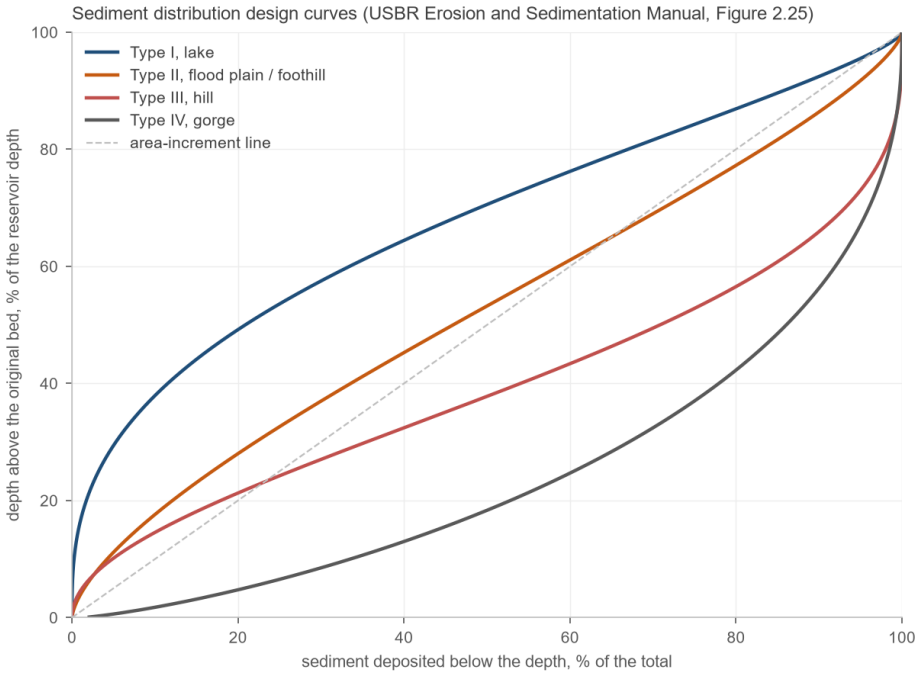


Figure 20 – Sediment distribution design curves (reproduction of USBR Figure 2.25): percentage of the reservoir depth against the percentage of the sediment deposited, for types I to IV and the area-increment line

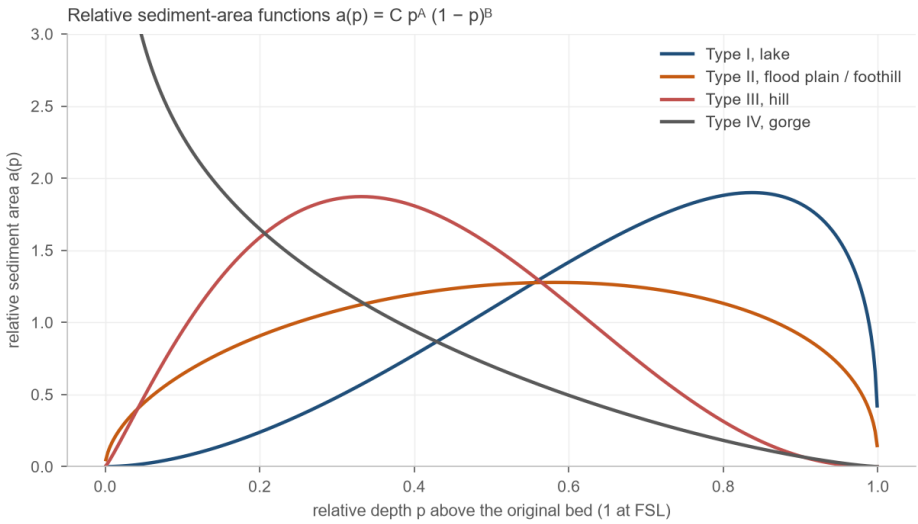


Figure 21 – Relative sediment-area functions $a(p) = C \cdot p^{A} \cdot (1-p)^{B}$ for reservoir types I to IV

The new zero-capacity elevation at the dam is the relative depth p_0 at which the reservoir function f(p) = (S − V_h) / (H A_h) equals the type curve F(p) = ∫ a dp / a(p), where V_h and A_h are the original capacity and area at the elevation of relative depth p and H the original reservoir depth. Below p_0 the reservoir is filled completely; above it the sediment area is a(p) scaled to the sediment volume, and the revised area and capacity follow by subtracting the sediment area and volume from the original curves.

6.3.4. Input data and results

Table 15 – Sediment-supply and soil-texture inputs

Dam	Catchment (km^2)	Sediment yield ($m^3/km^2/yr$)	Clay (%)	Silt (%)	Sand (%)	Deposited unit weight (kg/m^3)	Shape factor m	Reservoir type
Hawasinah 02	420	158	17	27	56	1,291	3.42	II
Hawasinah 11	226	185	17	27	56	1,290	2.48	III
Hawasinah UP	852	134	16	27	57	1,301	3.14	II
Shafan 02	224	180	16	27	57	1,294	2.70	II
Shafan 08	314	149	15	27	58	1,304	2.87	II
Sarami 03	228	178	16	27	57	1,295	2.47	III
Sarami 05	54	90	12	27	60	1,327	2.67	II
Sakhin 04	110	90	12	28	60	1,324	2.33	III
Sakhin 08 (Mehmum)	81	130	14	28	58	1,308	3.03	II

Table 16 gives the sediment deposited in 50 and 100 years, the revised capacity at full supply level, the storage lost and the rise of the bed at the dam. Seven reservoirs lose 1.9 to 8.3 % of their storage in 50 years and 3.8 to 16.7 % in 100 years. Hawasinah 02 and Shafan 08 are the exceptions: 0.08 Mm^3 of sediment a year settle in the 10.4 Mm^3 reservoir of Hawasinah 02, which loses 37 % of its storage in 50 years and 74 % in 100, and Shafan 08 loses 20 % and 39 %. Their designs should provide for sediment management, a dead storage allowance or periodic removal; at Hawasinah 02 the lost storage also degrades a flood-routing performance that already passes the 200-year peak almost unattenuated.

Table 16 – Reservoir volume reduction after 50 and 100 years

Dam	Capacity at FSL (Mm^3)	Deposit 50 yr (Mm^3)	Capacity 50 yr (Mm^3)	Loss 50 yr (%)	Bed rise 50 yr (m)	Deposit 100 yr (Mm^3)	Capacity 100 yr (Mm^3)	Loss 100 yr (%)	Bed rise 100 yr (m)
Hawasinah 02	10.41	3.84	6.57	36.9	4.2	7.69	2.73	73.7	9.5
Hawasinah 11	33.17	2.43	30.74	7.3	2.9	4.87	28.31	14.7	8.5
Hawasinah UP	79.22	6.60	72.61	8.3	2.0	13.21	66.01	16.7	2.3
Shafan 02	41.61	2.34	39.27	5.6	4.2	4.68	36.94	11.2	6.3
Shafan 08	13.71	2.69	11.02	19.6	4.7	5.39	8.33	39.2	7.4
Sarami 03	42.70	2.34	40.36	5.5	8.4	4.69	38.01	11.0	15.8
Sarami 05	14.52	0.27	14.25	1.9	0.6	0.55	13.98	3.8	1.2
Sakhin 04	22.61	0.56	22.04	2.5	0.0	1.13	21.48	5.0	0.0
Sakhin 08 (Mehmum)	7.46	0.60	6.86	8.1	2.4	1.21	6.25	16.2	3.4

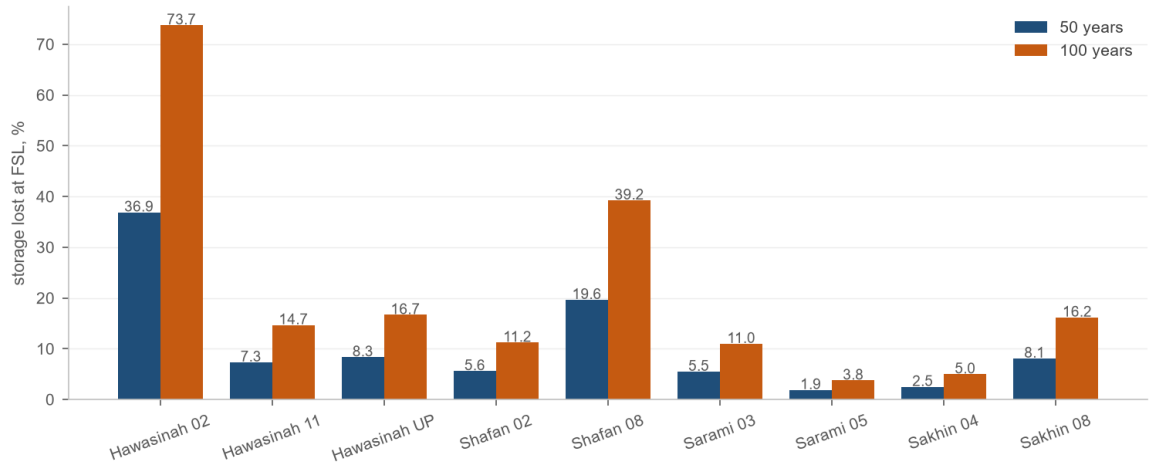


Figure 22 – Storage lost at full supply level after 50 and 100 years, per dam

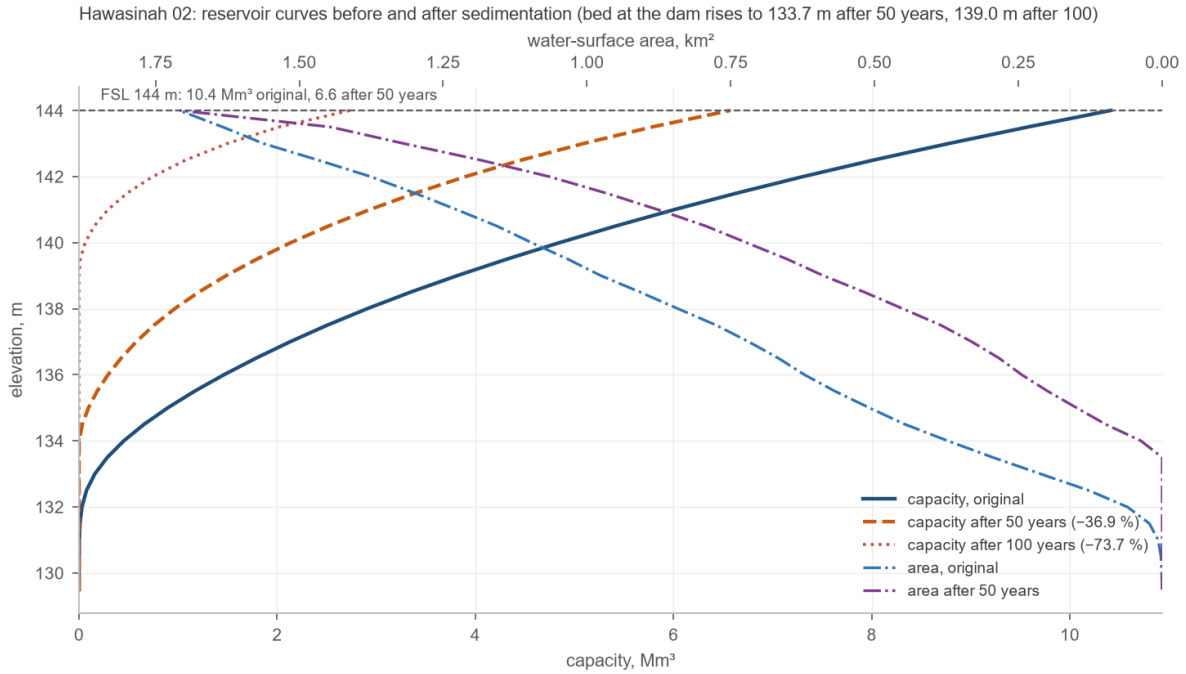


Figure 23 – Hawasinah 02: elevation-area-volume curves before and after sedimentation, capacity on the lower axis and area on the upper axis. The curves of the other dams are in Appendix B

7. CLIMATE AT THE DAM SITES

7.1. RECORD USED

The climate at each dam site is described from the ECMWF reanalysis at 9 km resolution read at the dam axis: daily temperature and rainfall for 2001 to 2023 and hourly wind at 10 m for 2015 to 2024. Neighbouring dams fall in the same grid cell and share a record: Shafan 02, Shafan 08 and Sarami 03 on one hand, Sakhin 04 and Sakhin 08 on the other. The rain gauges of the Ministry nearest to the dams, 3 to 14 km away, add the measured rainfall of recent years (Table 18).[1]

7.2. TEMPERATURE AND RAINFALL

The climate is hot and arid. The mean annual temperature at the dams is 28.4 to 29.1 °C; the hottest month is June or July, with mean daily maxima of 41.3 to 42.5 °C, and the coolest January, with mean daily minima of 13.7 to 14.5 °C. The mean annual rainfall is 66 to 106 mm, lowest at Hawasinah UP near the coast and highest at the dams of the foothills, with a strong variability from year to year: the driest years bring under 30 mm and the wettest over 200 mm. Most of the rain falls from November to April, with a secondary summer peak from the convective storms over the mountains.

Table 17 – Temperature and rainfall at the dam sites, 2001–2023

Dam	Mean T (°C)	Hottest month, mean daily max (°C)	Coolest month, mean daily min (°C)	Absolute max (°C)	Absolute min (°C)	Mean annual rain (mm)	Driest – wettest year (mm)	Wet days a year	Nov–Apr share (%)
Hawasinah 02	28.6	Jun 41.3	Jan 14.2	49.3	7.0	91	29 – 257	16	68
Hawasinah 11	29.1	Jun 42.5	Jan 14.0	48.8	6.3	92	29 – 274	16	68
Hawasinah UP	28.7	Jun 41.3	Jan 14.5	49.3	7.5	66	8 – 250	10	69
Shafan 02	28.9	Jun 42.2	Jan 14.1	49.2	6.7	104	30 – 241	17	73
Shafan 08	28.6	Jun 41.6	Jan 14.0	49.2	6.6	104	30 – 241	17	73
Sarami 03	29.0	Jun 42.2	Jan 14.2	49.2	6.8	104	30 – 241	17	73
Sarami 05	28.4	Jun 41.7	Jan 13.7	49.3	7.1	106	30 – 221	18	74
Sakhin 04	28.6	Jun 41.8	Jan 13.8	49.3	7.2	106	30 – 207	18	75
Sakhin 08 (Mehmum)	28.5	Jun 41.7	Jan 13.9	49.2	7.3	106	30 – 207	18	75

Figure 24 shows the monthly air temperature and rainfall of Block 04 and Figure 25 its annual rainfall, both as the average of the nine dam sites; the sites differ from that average by at most 6 mm in any month, and their own annual means are given in Table 17.

[1] ECMWF IFS at 9 km (2017 on) and ERA5 / ERA5-Land before, through the Open-Meteo historical archive, read in October 2026 at the dam axes. MRMWR rain gauges: gap-filled daily record of July 2024.

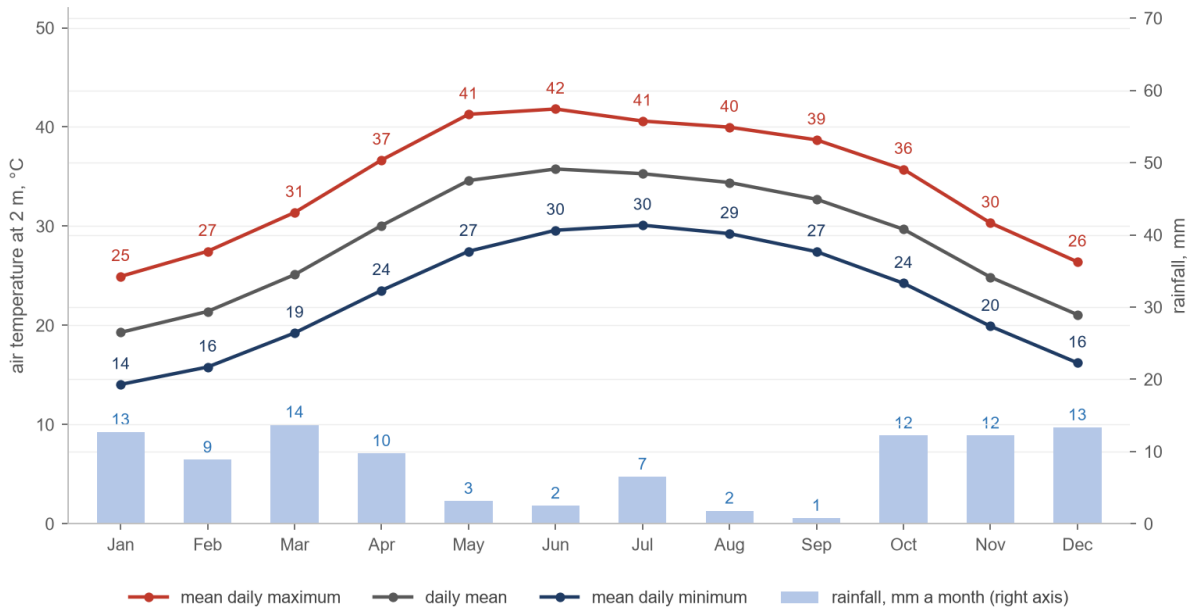


Figure 24 – Monthly air temperature and rainfall of Block 04, 2001–2023, averaged over the nine dam sites

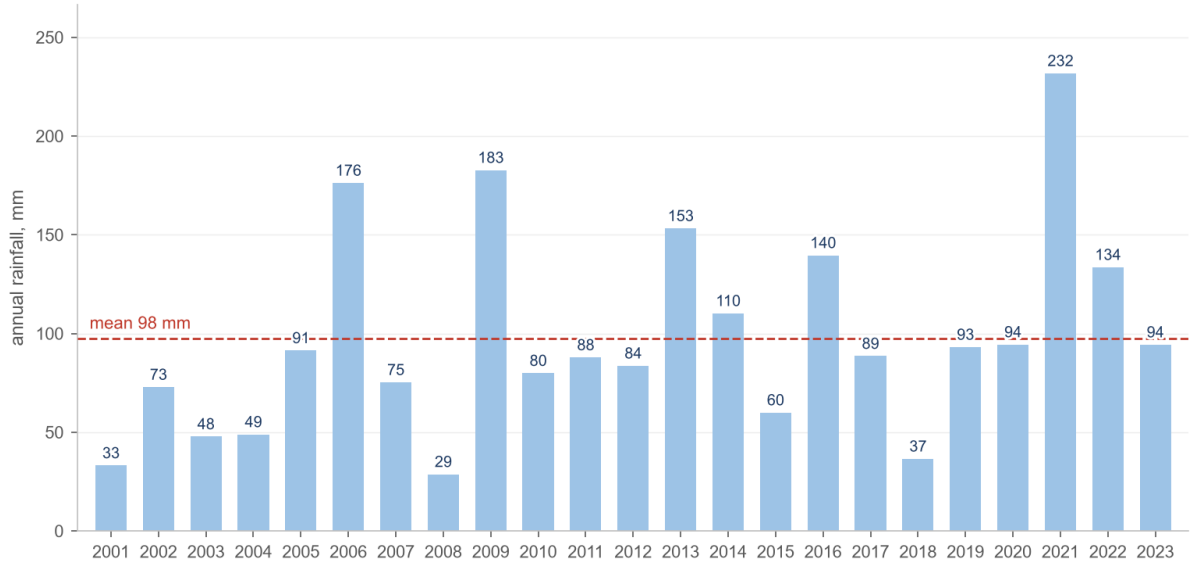


Figure 25 – Annual rainfall of Block 04, 2001–2023, averaged over the nine dam sites, and its mean

The rain gauges of the Ministry nearest to each dam are listed in Table 18 with their recent records. The telemetry gauges of the plain and the foothills recorded 135 to 263 mm a year over four to seven complete years, with the extreme year 2017 above 400 mm at some of them. The records are short and are shown beside the reanalysis, which covers 23 years, not instead of it.

Table 18 – Rain gauges nearest to the dams and their records


Dam	Nearest gauge with a record	Distance (km)	Complete years	Period	Mean annual rainfall (mm)
Hawasinah 02	Y3	3.2	7	2015–2021	135
Hawasinah 11	Y3	5.6	7	2015–2021	135
Hawasinah UP	Y3	14.2	7	2015–2021	135
Shafan 02	Z71	7.8	5	2016–2020	141
Shafan 08	Z71	11.7	5	2016–2020	141
Sarami 03	Z71	5.6	5	2016–2020	141
Sarami 05	Z71	9.8	5	2016–2020	141
Sakhin 04	Z64	11.6	4	2016–2020	263
Sakhin 08 (Mehmum)	Z64	10.5	4	2016–2020	263

7.3. WIND


The wind at 10 m averages 2.8 to 3.0 m/s at the dam sites and is calm, below 1 m/s, for 8 to 11 % of the hours. At the dams of the foothills the land breeze from the south-west and west, flowing down the wadis at night, takes the largest share of the hours, and the north-easterly sea breeze the afternoons; at Hawasinah UP and Sarami 05, nearer the coast, the sea breeze from the north-east to east-north-east prevails. Speeds above 8 m/s are rare. The wind rose of each dam is given in Table 19.

Table 19 – Wind roses at the dam sites, all hours 2015–2024: the direction the wind blows from and the share of hours in each speed class


Hawasinah 02

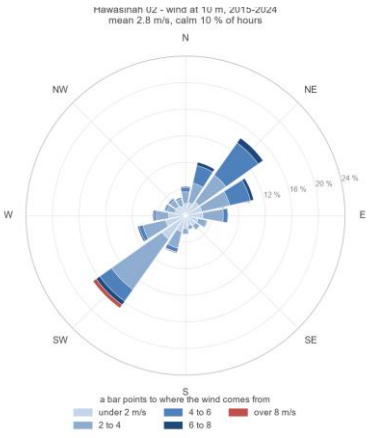


Hawasinah 11

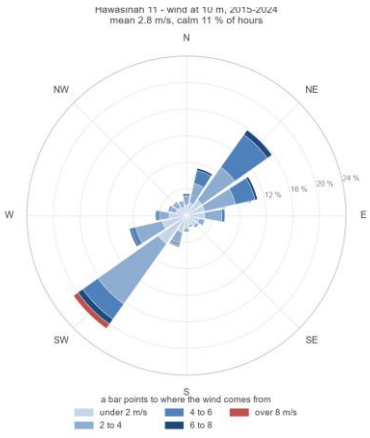


Hawasinah UP

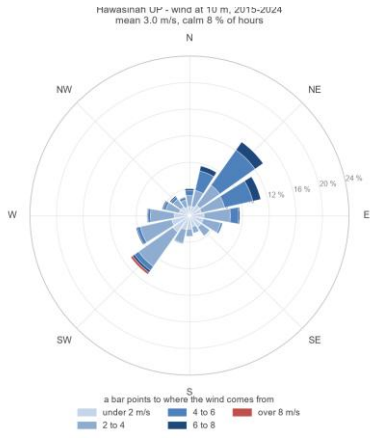


Shafan 02

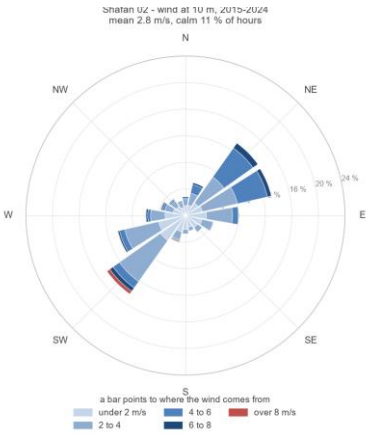


Shafan 08

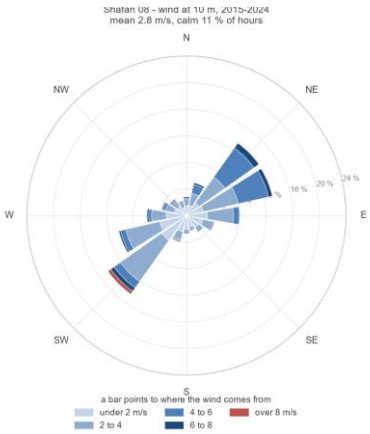


Sarami 03

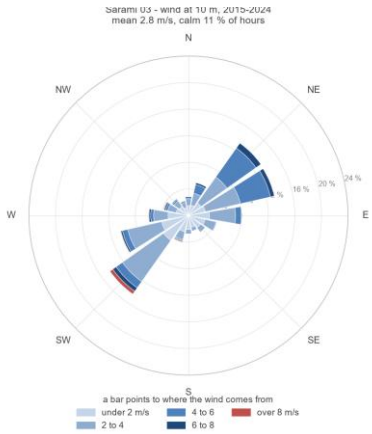


Sarami 05

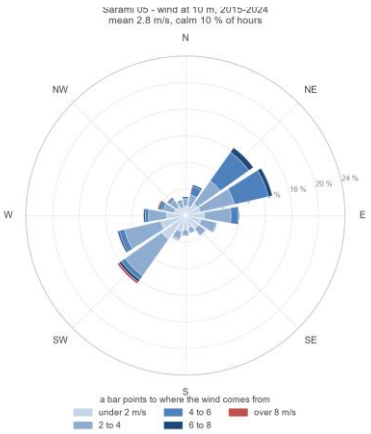

Sakhin 04

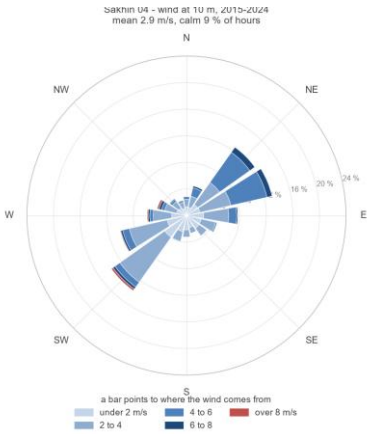

Sakhin 08 (Mehmum)

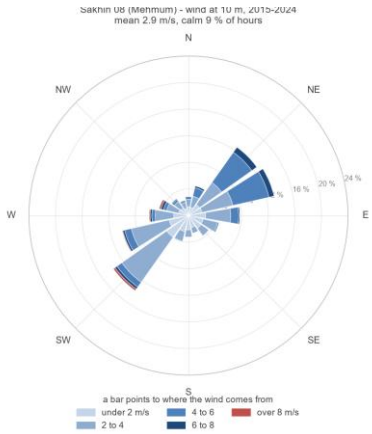

7.4. CLIMATE CHANGE

The records themselves show a warming of 0.23 to 0.94 °C per decade over 2001 to 2023. The Sixth Assessment Report of the IPCC places the Arabian Peninsula among the regions warming faster than the global mean, with more frequent and longer hot spells, and projects for the Gulf of Oman coast a mean annual rainfall that stays low and uncertain in sign while the intensity of the heaviest daily rainfall increases with the warming of the sea and the air. The tropical cyclones of the Arabian Sea, Gonu in 2007 and Shaheen in 2021, have already brought daily totals to the Batinah coast beyond anything in the earlier gauged record.[1]

For the dams this means three things. The design rainfall of the national study, derived from the gauged record, is the floor of the flood load and not its ceiling; the spillway capacity and the head at the probable maximum flood are the margin against a larger event. Hotter and drier years lengthen the empty periods of the reservoirs and the exposure of their beds, and more intense storms raise the sediment yield above the

[1] IPCC (2021), Climate Change 2021: The Physical Science Basis, Sixth Assessment Report, Working Group I, Chapter 11 and Atlas, regional findings for the Arabian Peninsula.

long-term rate, so the storage lost to sedimentation should be read as a lower bound. The operating rules of the outlets and the freeboard of the downstream channels should be reviewed against the updated rainfall statistics when the national study is revised.

8. HYDRAULIC DESIGN CRITERIA

The hydraulic design of the channels follows one set of criteria for the channel geometry, the flow parameters, the slopes, the outfall conditions and the crossings, applied to every reach so that the system is coherent and hydraulically sound. The criteria are summarised in Table 20.

Table 20 – Channel design criteria

Item	Criterion
Channel geometry	Trapezoidal section; depth 2.5 m, or the depth of the existing wadi where it is deeper; side slopes 1:1.5 on both sides; freeboard 0.6 m
Flow formula	Manning equation: $Q = \frac{1}{n} A R^{2/3} S^{1/2}$
Manning's n	Earth channels 0.03; concrete culverts 0.02 (higher than the material value, for sedimentation)
Velocity and slope	Maximum velocity 3 m/s; minimum slope at the flat sea outfalls 0.001 m/m
Outfall conditions	Bank height = max (MHHW, flow depth) + 0.6 m freeboard; the channels terminate at the coastal road crossings
Culvert design	Barrel height = channel height; full channel width covered; slope 0.5 to 5 %; n = 0.02
Cut and fill	Cut preferred, so that the surrounding runoff drains into the channel; fill only where a constraint forces the bed above ground, with embankments on both sides and a return to cut within 500 m
Geometric constraints	OQ pipelines; existing culverts and bridges at the Expressway, the Batinah Highway and the coastal road; outfalls

Table 21 – Mean tidal levels in North and South Al Batinah (m), Oman Maritime Book 2024

Reference port	Mean	MHHW	MLHW	MHLW	MLLW
Al Khaburah	1.80	0.70	0.62	-0.23	-1.00
Saham	1.82	0.68	0.61	-0.25	-1.02
Port of Suhar (Majis)	1.20	1.40	1.30	0.50	-0.30

The channels are trapezoidal in cut and in fill, with side slopes of 1:1.5 on the inner and the outer face. Cut is preferred, because the surrounding surface runoff then drains into the channel; where a constraint forces the bed above the ground, the channel runs in fill between two embankments and returns to cut within 500 m.

The typical sections of the project are shown in Figure 26 for a channel in fill, between two embankments with a 4 m crest, and in Figure 27 for a channel in cut: side slopes of 1:1.5, riprap over geotextile on the inner faces, a toe trench at each bed edge and gravel protection on the outer face of the embankment.

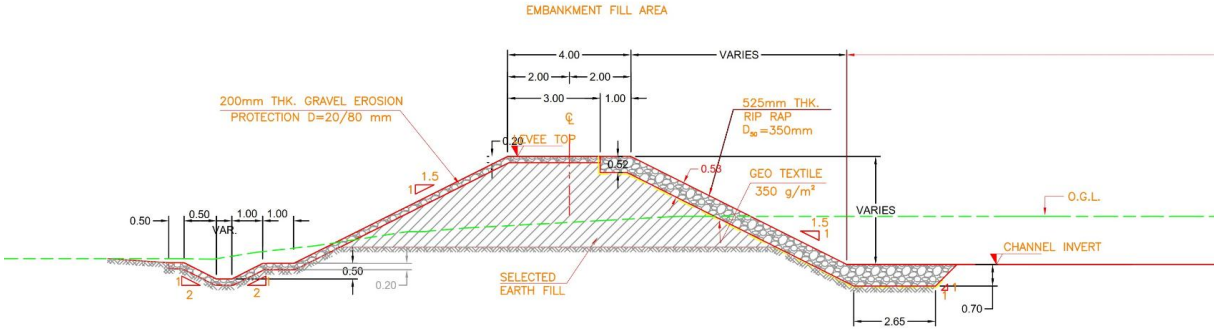


Figure 26 – Typical channel section in fill

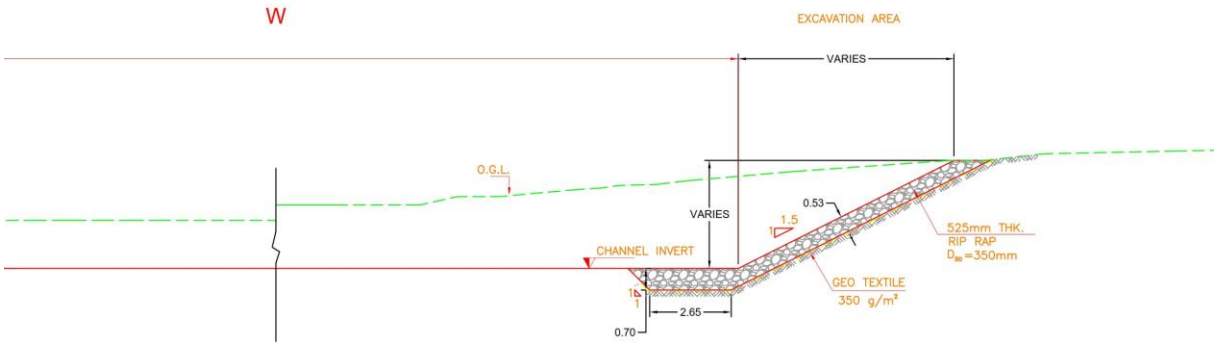


Figure 27 – Typical channel section in cut

Each reach is sized with Manning's equation for uniform flow on the designed bed slope, with the water surface at three quarters of the channel depth:

$$Q = \frac{1}{n} A R^{2/3} S^{1/2} \quad (12)$$

$$A = 0.75\, b\, D, \quad R = \frac{0.75\, b\, D}{b + 1.5\, D} \quad (13)$$

Q: 200-year design flow of the reach, m^3/s

n: Manning's roughness, 0.030, $s/m^{(1}/3)$

A: flow area at three quarters of the depth, m^2

R: hydraulic radius, m

S: bed slope of the reach, m/m

b: bed width, the smallest value in steps of 0.5 m that carries Q, m

D: channel depth, 2.5 m or 3 m, m

At the sea outfalls the bank height follows the tidal level or the flow depth, whichever is higher, plus the freeboard:

$$H_{bank} = max(MHHW, y) + 0.6 \quad (14)$$

H_{bank}: bank height above the channel bed, m

MHHW: mean higher high water of the nearest reference port, m

y: flow depth at the outfall, m

8.1. MAIN ISSUES IN CHANNEL DESIGN

A number of constraints and site-specific challenges affect both the hydraulic performance of the channels and the practicality of their construction. They fall in four groups: road and culvert crossings, energy corridors and utilities, wadi path and land-use conflicts, and sand mining and environmental risks.

Table 22 – Challenges in the design of the channels

Group	Issues
Culverts and road crossings	Existing culvert and bridge sizes insufficient for the channelised flow; drainage crossings that have altered the wadi paths downstream; floodways recommended for the internal roads
Energy corridors and utilities	Conflicts with the OQ pipelines, which are shallow; the exact position and depth of every utility are required for the detailed design
Wadi path and land-use conflicts	Wadi ownership by the Ministry is critical for enforcement; wadis blocked by constructions; depressed areas where the wadis flatten into wide plains and pond around homes and farms; wadis narrowed as farm owners extend their boundaries; the wadi bed to be reserved against developments within the 200-year flood extent
Sand mining and environmental risks	Sand extraction up to 3 m deep destabilises the channel beds; animal carcasses in the ponds after floods are a health hazard
Consequences	With the above constraints not sorted out, the system will not be designed for cyclone-level protection; conveyance is constrained by undersized crossings, narrowed wadis and shallow pipelines; the upstream dams are essential to capture and reduce the flood volumes before they reach the developments

8.2. CHANNEL DEPTH

The design depth is 2.5 m. Where the existing wadi is deeper than that at the design points, the channel keeps the depth of the wadi, 3 m: HAW-CH1-FP, SHA-CH1-FP over the reaches concerned (Figure 28). The depth of every reach is in the appendix table.

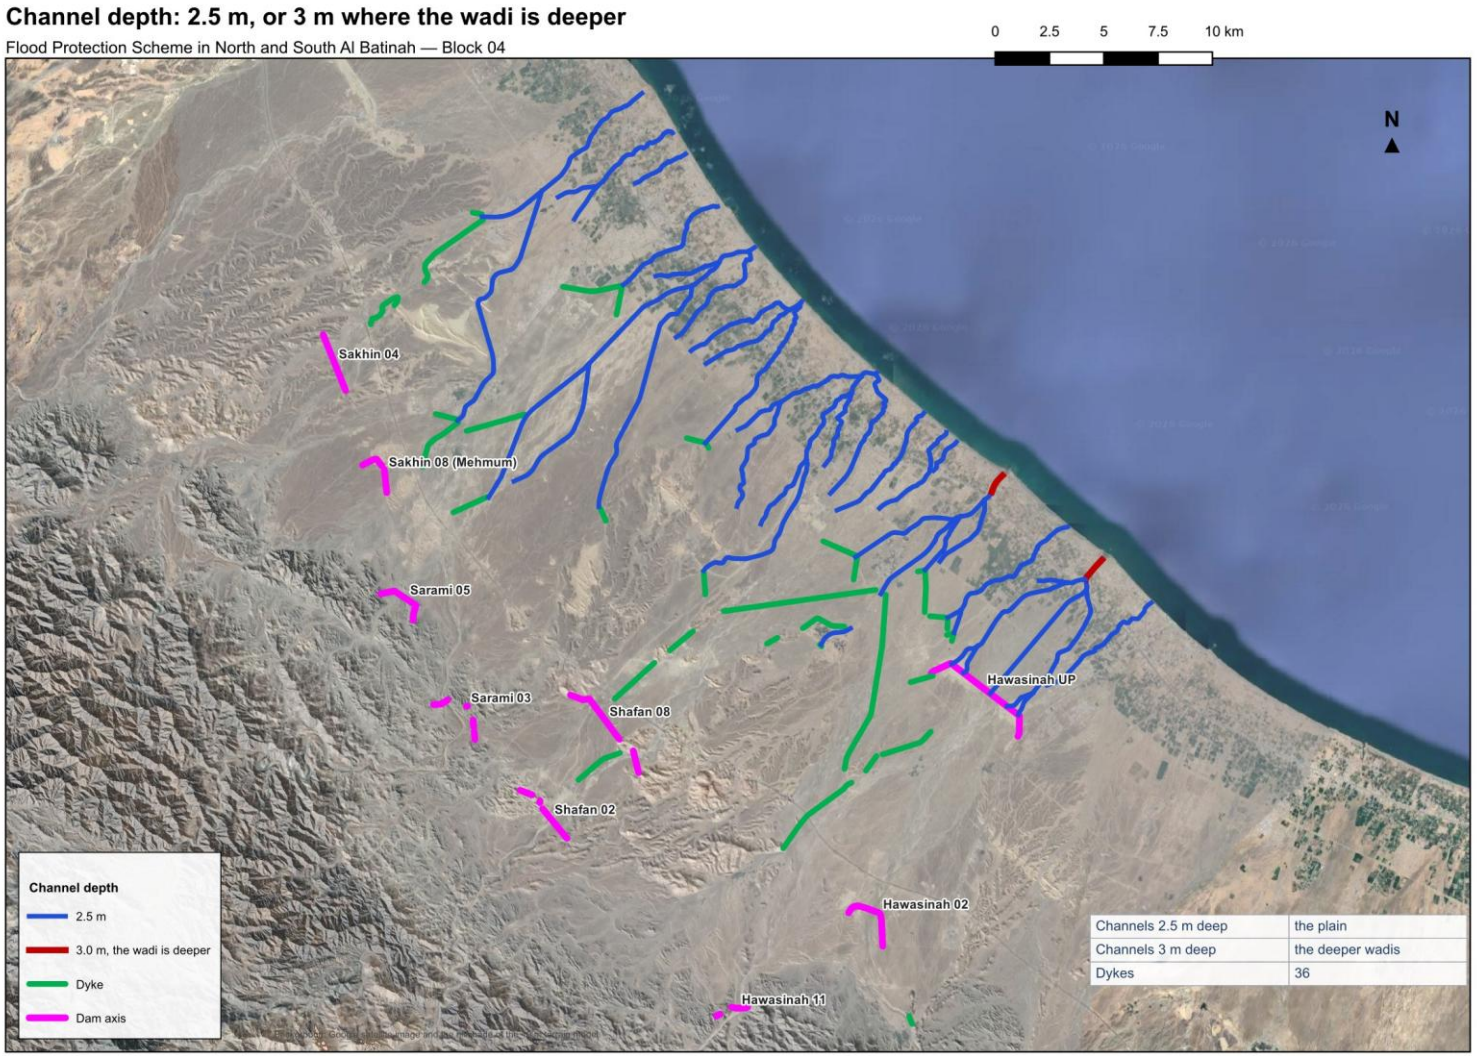


Figure 28 – Channel depth: 2.5 m, or 3 m where the wadi is deeper

8.3. CHANNEL SECTIONS FOR THE 200-YEAR FLOW

Every channel is sized for the 200-year flow it carries with the nine dams in place: the routed outflows of the dams and the runoff of the plain, added reach by reach at the junctions of the hydrological model. Table 23 gives, for each channel, its class and length, the 200-year design flow of its largest reach, the bed width of its first and last reach and the depth of its sections. The sections are sized in the SewerGEMS hydraulic model on the designed bed slope with Manning's n of 0.030, the water at three quarters of the depth and the width in steps of 0.5 m; the width grows from reach to reach as the tributaries join.

Table 23 – Channel sections for the 200-year flow

Channel	Class	Length (km)	Design flow (m^3/s)	Bed width (m), first to last reach	Depth (m)
HAW-CH1-FP	Flood protection	8.2	373	29 to 89.5	2.5 and 3.0
HAW-CH2-SS	Stormwater secondary	7.7	215	10 to 54	2.5
HAW-CH3-SS	Stormwater secondary	1.4	–	10	2.5
HAW-CH4-SS	Stormwater secondary	1.4	–	10	2.5
HAW-CH5-SS	Stormwater secondary	7.1	199	10 to 44.5	2.5
HAW-CH6-SS	Stormwater secondary	1.3	25	10	2.5
HAW-CH7-SS	Stormwater secondary	6.5	80	12.5 to 29	2.5
SHA-CH1-FP	Flood protection	8.0	996	156.5 to 218.5	2.5 and 3.0
SHA-CH2-SM	Stormwater main	11.4	637	83.5 to 107.5	2.5
SHA-CH3-SM	Stormwater main	13.9	795	10 to 267	2.5
SHA-CH4-SM	Stormwater main	8.3	753	94.5 to 253	2.5
SHA-CH5-SM	Stormwater main	9.9	249	20.5 to 50	2.5
SHA-CH6-SM	Stormwater main	5.2	154	14.5 to 46	2.5
SHA-CH7-SM	Stormwater main	7.4	273	15 to 58	2.5
SHA-CH8-SS	Stormwater secondary	5.9	76	13 to 20	2.5
SHA-CH9-SS	Stormwater secondary	5.5	149	10 to 52	2.5
SHA-CH10-SS	Stormwater secondary	5.4	336	25 to 72.5	2.5
SHA-CH11-SS	Stormwater secondary	2.4	106	22	2.5
SHA-CH12-SS	Stormwater secondary	3.8	–	10	2.5
SHA-CH13-SS	Stormwater secondary	1.6	313	49.5	2.5
SHA-CH14-SS	Stormwater secondary	3.9	113	12 to 24	2.5
SHA-CH15-SS	Stormwater secondary	6.8	120	10 to 28.5	2.5
SHA-CH16-SS	Stormwater secondary	6.4	105	14 to 37.5	2.5
SHA-CH17-SS	Stormwater secondary	5.1	207	29 to 42	2.5
SHA-CH18-SS	Stormwater secondary	3.0	119	37	2.5
SHA-CH19-SS	Stormwater secondary	1.8	–	10	2.5
SHA-CH20-SS	Stormwater secondary	3.8	185	12.5 to 40.5	2.5
SHA-CH21-SS	Stormwater secondary	1.1	71	11.5	2.5
SAR-CH1-FP	Flood protection	17.6	1,036	58 to 343	2.5
SAR-CH2-SM	Stormwater main	6.1	333	49 to 94	2.5
SAR-CH3-SS	Stormwater secondary	6.9	336	41 to 49	2.5
SAR-CH4-SS	Stormwater secondary	3.1	65	15	2.5

Channel	Class	Length (km)	Design flow (m^3/s)	Bed width (m), first to last reach	Depth (m)
SAK-CH1-FP	Flood protection	12.5	708	58.5 to 238	2.5
SAK-CH2-FP	Flood protection	9.8	1,461	74.5 to 488	2.5
SAK-CH3-SM	Stormwater main	6.5	264	45 to 90.5	2.5
SAK-CH4-SS	Stormwater secondary	1.9	–	10	2.5
SAK-CH5-SS	Stormwater secondary	2.8	149	14 to 52.5	2.5

The flood-protection channels carry 373 to 1,461 m^3/s and reach bed widths of 89.5 to 488 m at their outfalls, the widest being SAK-CH2-FP at 488 m. The stormwater main channels carry 154 to 795 m^3/s with bed widths of 10 to 267 m, and the stormwater secondary channels 25 to 336 m^3/s with bed widths of 10 to 72.5 m. The widths are those of the hydraulic sizing; the final section at each crossing and constraint, and the velocities along the steeper reaches, follow in the detailed design.

Figure 29 draws the bed of every reach to scale with its width; Figure 30 gives the 200-year design flow along the channels, rising from reach to reach as the tributaries join. The lengths by class are in Figure 31, the distribution of the designed widths, weighted by length, in Figure 32, and the full inventory of sizes in Table 24. Figure 33 relates the width of each reach to its design flow: at a given flow the width varies with the bed slope, the flatter reaches near the coast being the wider.

Designed bed width of the channels for the 200-year flow (m)

Flood Protection Scheme in North and South Al Batinah — Block 04

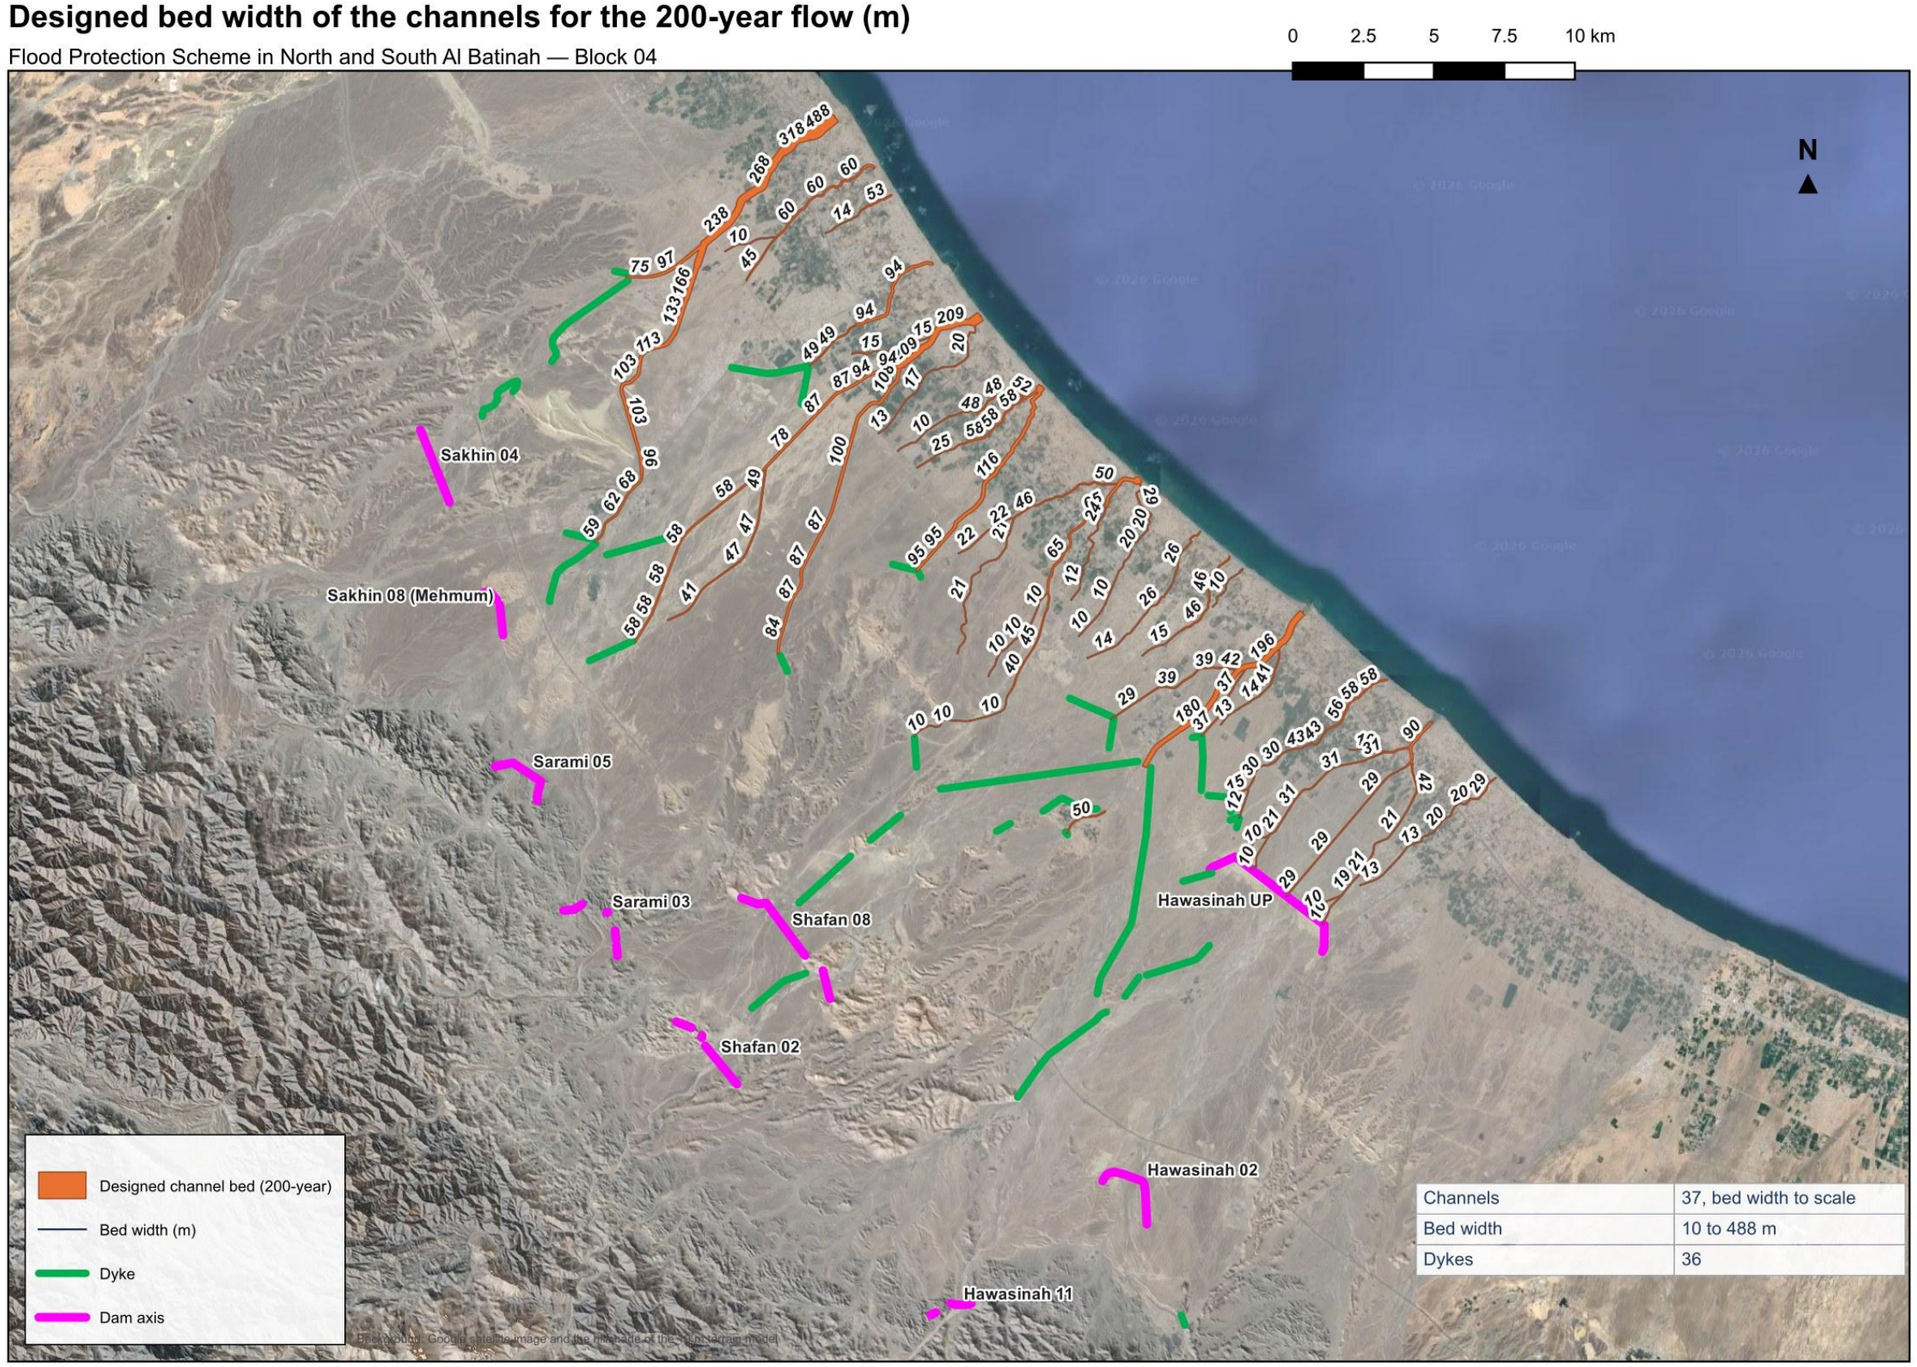


Figure 29 – Designed bed width of the channels for the 200-year flow (m)

200-year design flow along the channels (m³/s)

Flood Protection Scheme in North and South Al Batinah — Block 04

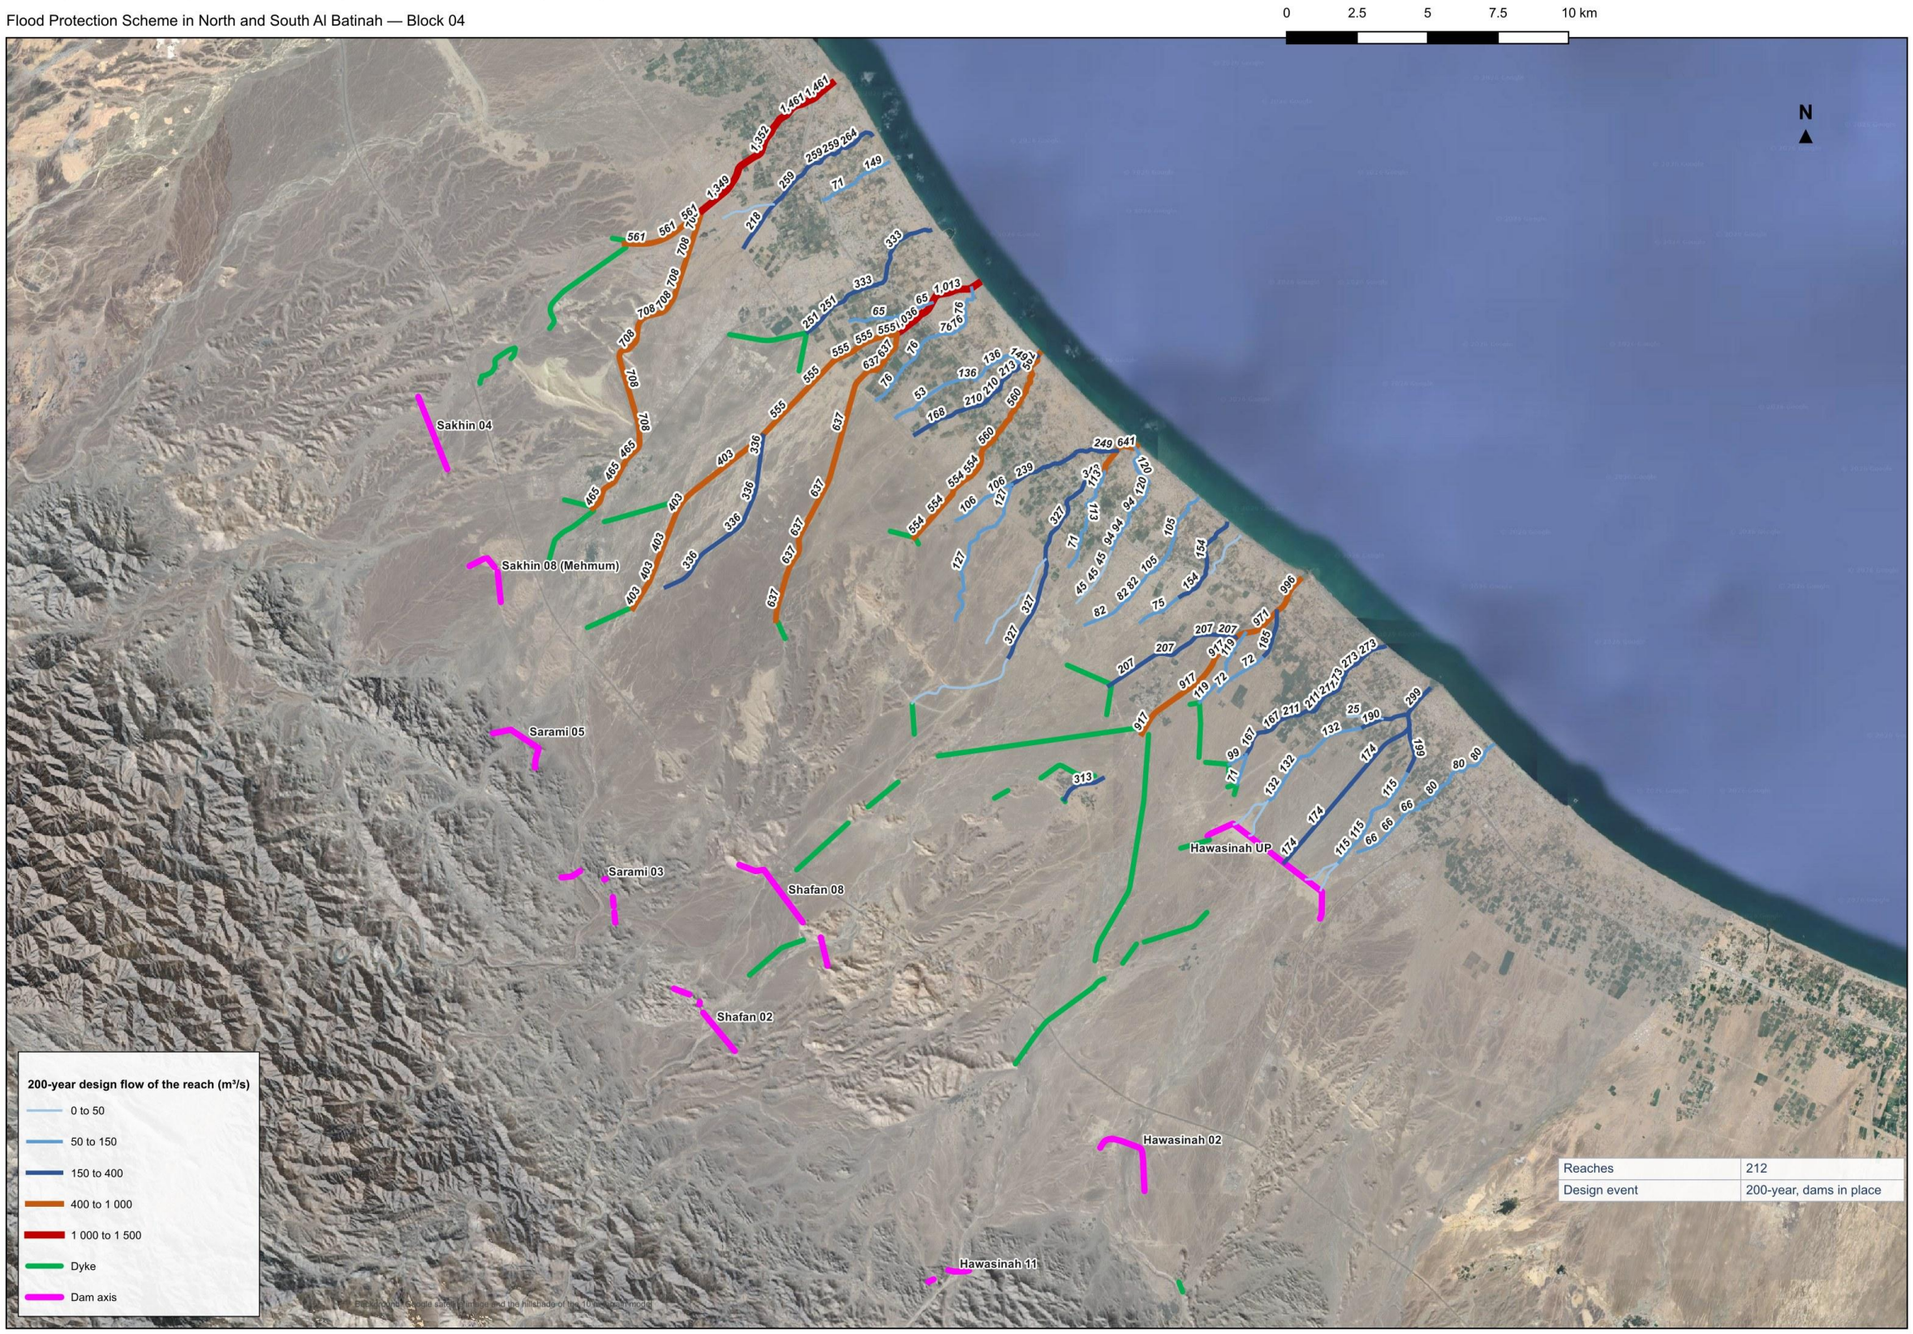


Figure 30 – 200-year design flow along the channels (m³/s)

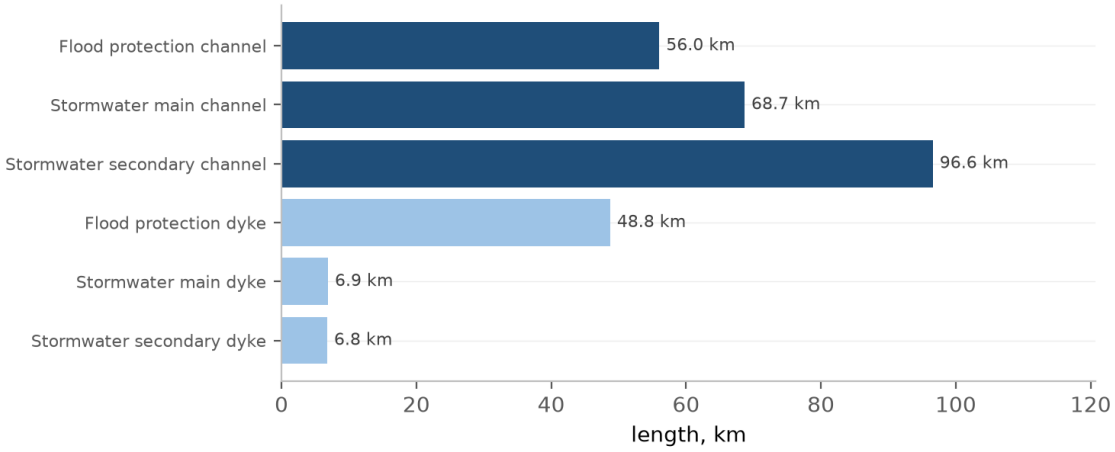


Figure 31 – Channels and dykes of Block 04 by class

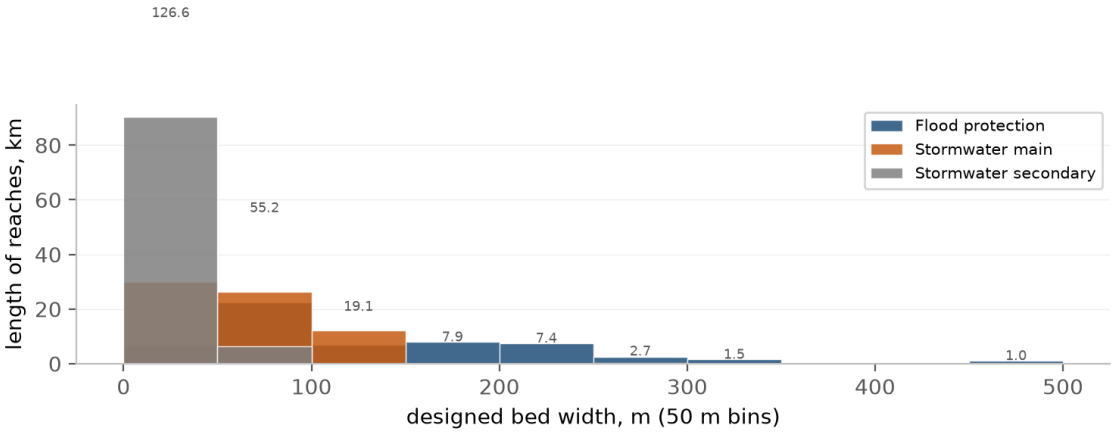


Figure 32 – Distribution of the designed bed widths, by length of reach, in 50 m bins

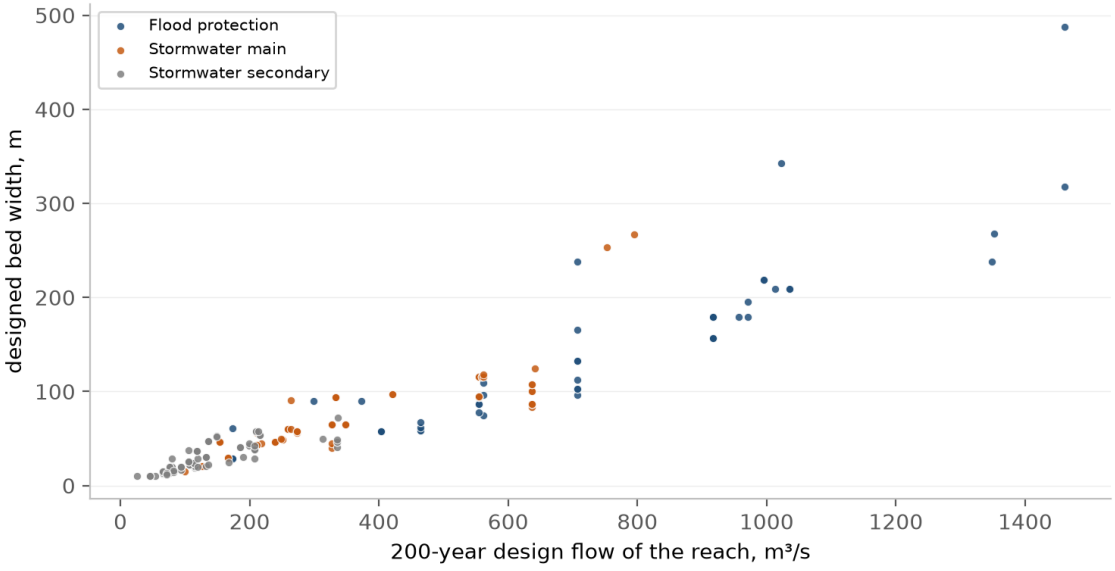


Figure 33 – Designed bed width against the 200-year design flow of the reach

Table 24 – Channel sizes inventory: depth x bed width (m) and the length of reaches of that size (m)

Size (m)	Length (m)	Size (m)	Length (m)	Size (m)	Length (m)
2.5 x 10	23,146	2.5 x 42	2,030	2.5 x 94.5	1,969
2.5 x 11.5	1,089	2.5 x 43	1,683	2.5 x 96	1,305
2.5 x 12	1,856	2.5 x 44.5	2,437	2.5 x 96.5	1,456
2.5 x 12.5	2,596	2.5 x 45	1,858	2.5 x 97	885
2.5 x 13	2,652	2.5 x 46	5,890	2.5 x 100	3,283
2.5 x 13.5	1,243	2.5 x 46.5	2,939	2.5 x 102.5	3,166
2.5 x 14	3,683	2.5 x 47.5	2,066	2.5 x 107.5	1,965
2.5 x 14.5	1,717	2.5 x 49	3,148	2.5 x 109.5	766
2.5 x 15	3,802	2.5 x 49.5	1,642	2.5 x 112.5	1,113
2.5 x 15.5	667	2.5 x 50	1,684	2.5 x 116	5,338
2.5 x 16.5	559	2.5 x 52	794	2.5 x 118	861
2.5 x 17	2,488	2.5 x 52.5	1,096	2.5 x 124.5	729
2.5 x 19	868	2.5 x 54	941	2.5 x 132.5	1,830
2.5 x 19.5	2,226	2.5 x 56	1,359	2.5 x 156.5	1,910
2.5 x 20	4,519	2.5 x 57.5	3,551	2.5 x 165.5	1,249
2.5 x 20.5	10,194	2.5 x 58	8,896	2.5 x 179.5	3,706
2.5 x 22	2,827	2.5 x 58.5	1,130	2.5 x 195.5	1,009
2.5 x 24	2,088	2.5 x 60	4,199	2.5 x 209	3,262
2.5 x 25	1,941	2.5 x 60.5	264	2.5 x 218.5	499
2.5 x 25.5	3,436	2.5 x 61.5	866	2.5 x 238	2,742
2.5 x 28.5	1,412	2.5 x 65	4,138	2.5 x 253	109
2.5 x 29	9,404	2.5 x 67.5	994	2.5 x 267	86
2.5 x 29.5	1,996	2.5 x 72.5	576	2.5 x 268	2,499
2.5 x 30.5	4,188	2.5 x 74.5	901	2.5 x 317.5	1,218
2.5 x 37	3,019	2.5 x 77.5	1,945	2.5 x 343	284
2.5 x 37.5	317	2.5 x 83.5	1,649	2.5 x 488	1,012
2.5 x 38.5	2,642	2.5 x 86.5	6,957	3.0 x 89.5	1,166
2.5 x 40	1,667	2.5 x 89.5	415	3.0 x 218.5	920
2.5 x 40.5	1,654	2.5 x 90.5	416		
2.5 x 41	3,014	2.5 x 94	5,631		
Total	**221,346**				

The reaches are labelled channel by channel, catchment by catchment, in Figure 34 to Figure 37; their length, slope, velocity, size and flow are listed in Appendix C, and the plan and profile drawings in Appendix D. 96 of the 212 reaches run above 3 m/s at the 200-year flow on the steeper ground of the foothills; energy dissipation, bed protection or a flatter profile in steps will be set for them in the detailed design.

Channels and reach numbers: Al Hawasinah catchment (7 channels, 32 reaches)

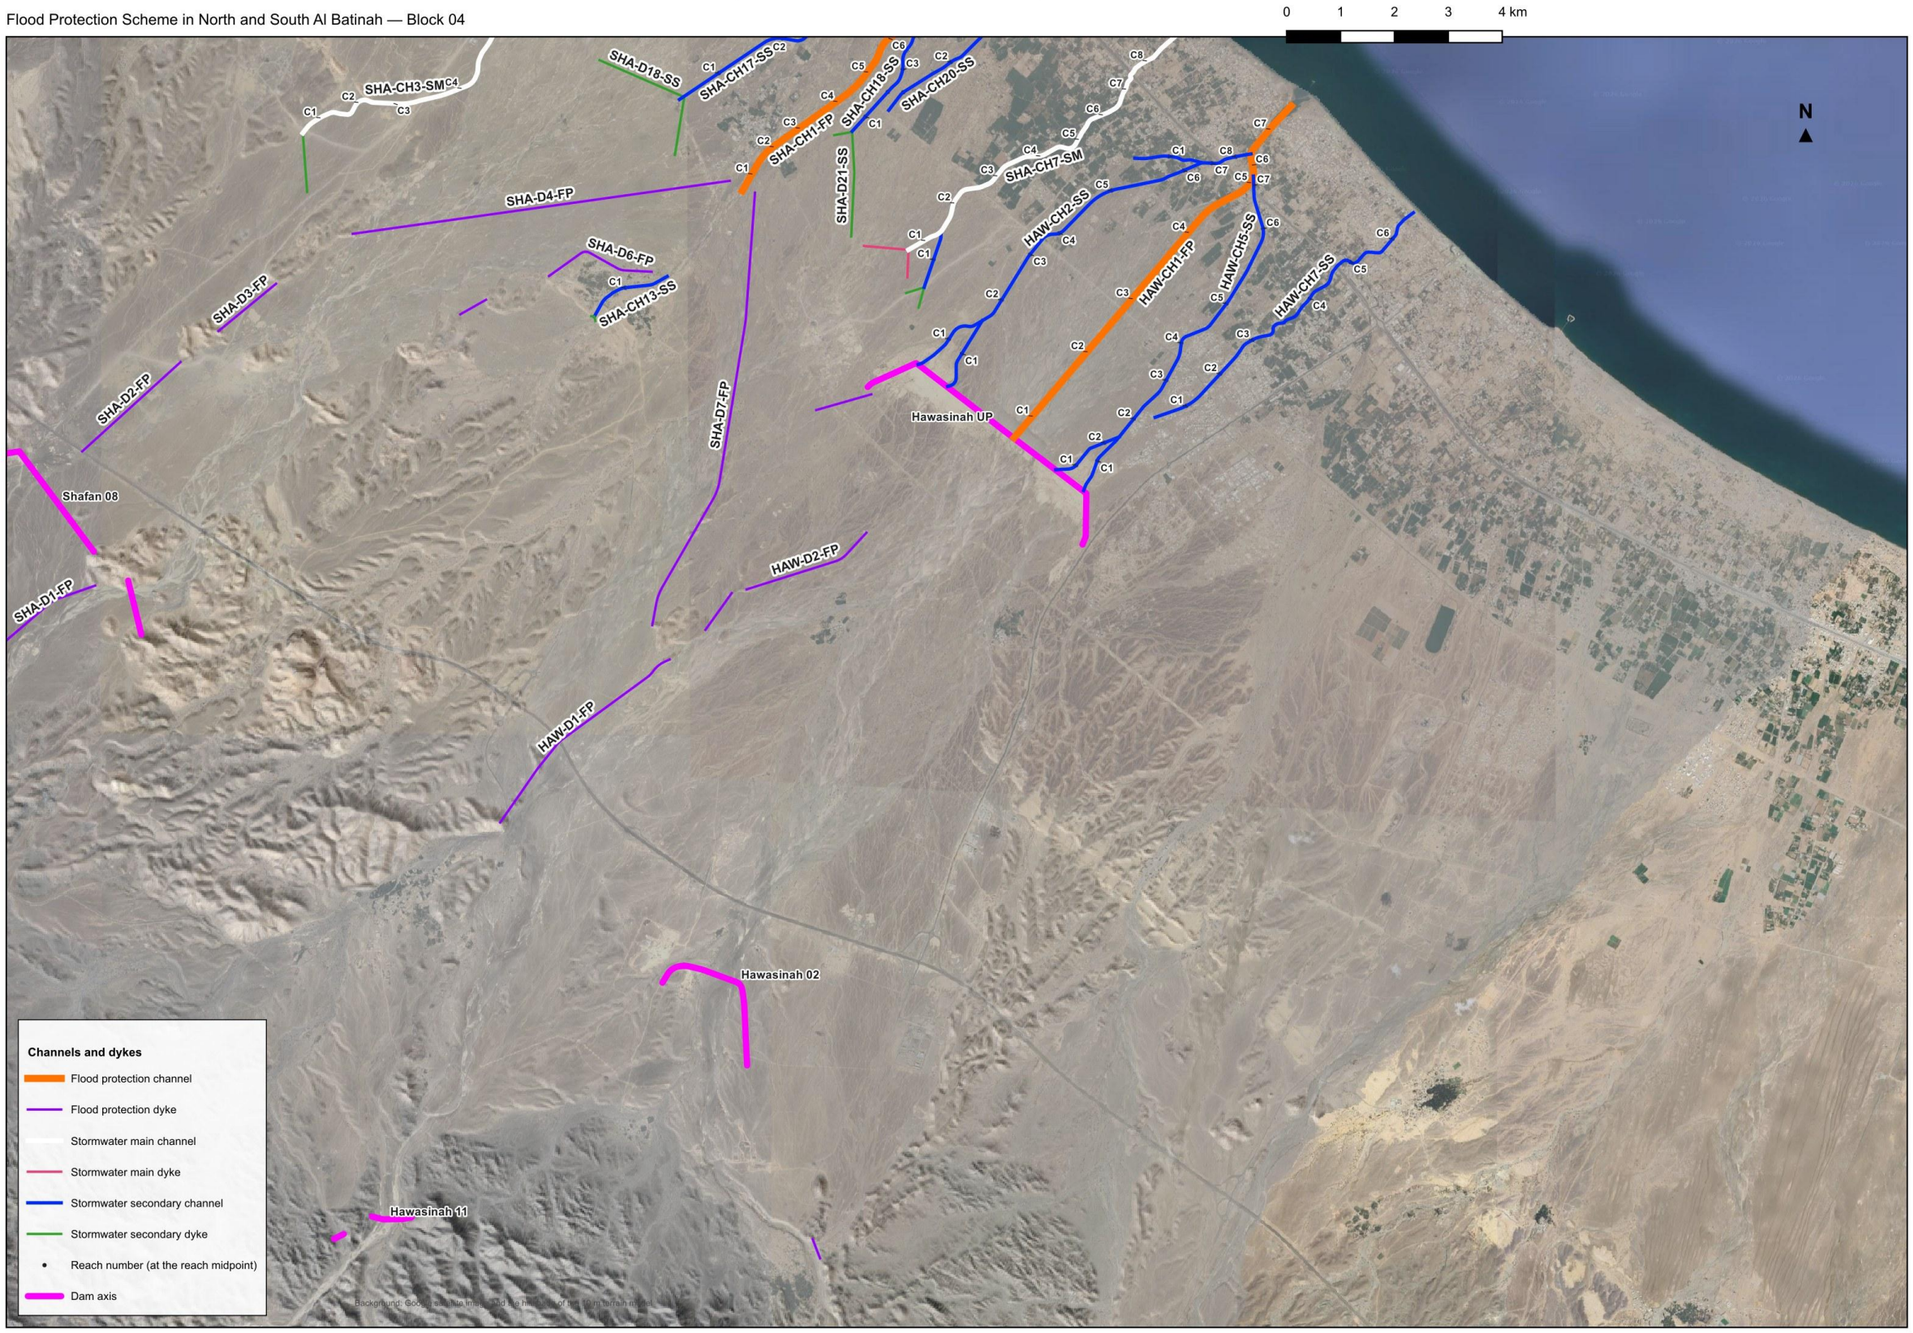


Figure 34 – Channels by class with their names and the reach numbers of the hydraulic model: Al Hawasinah catchment

Channels and reach numbers: Shafan catchment (21 channels, 125 reaches)

Flood Protection Scheme in North and South Al Batinah — Block 04

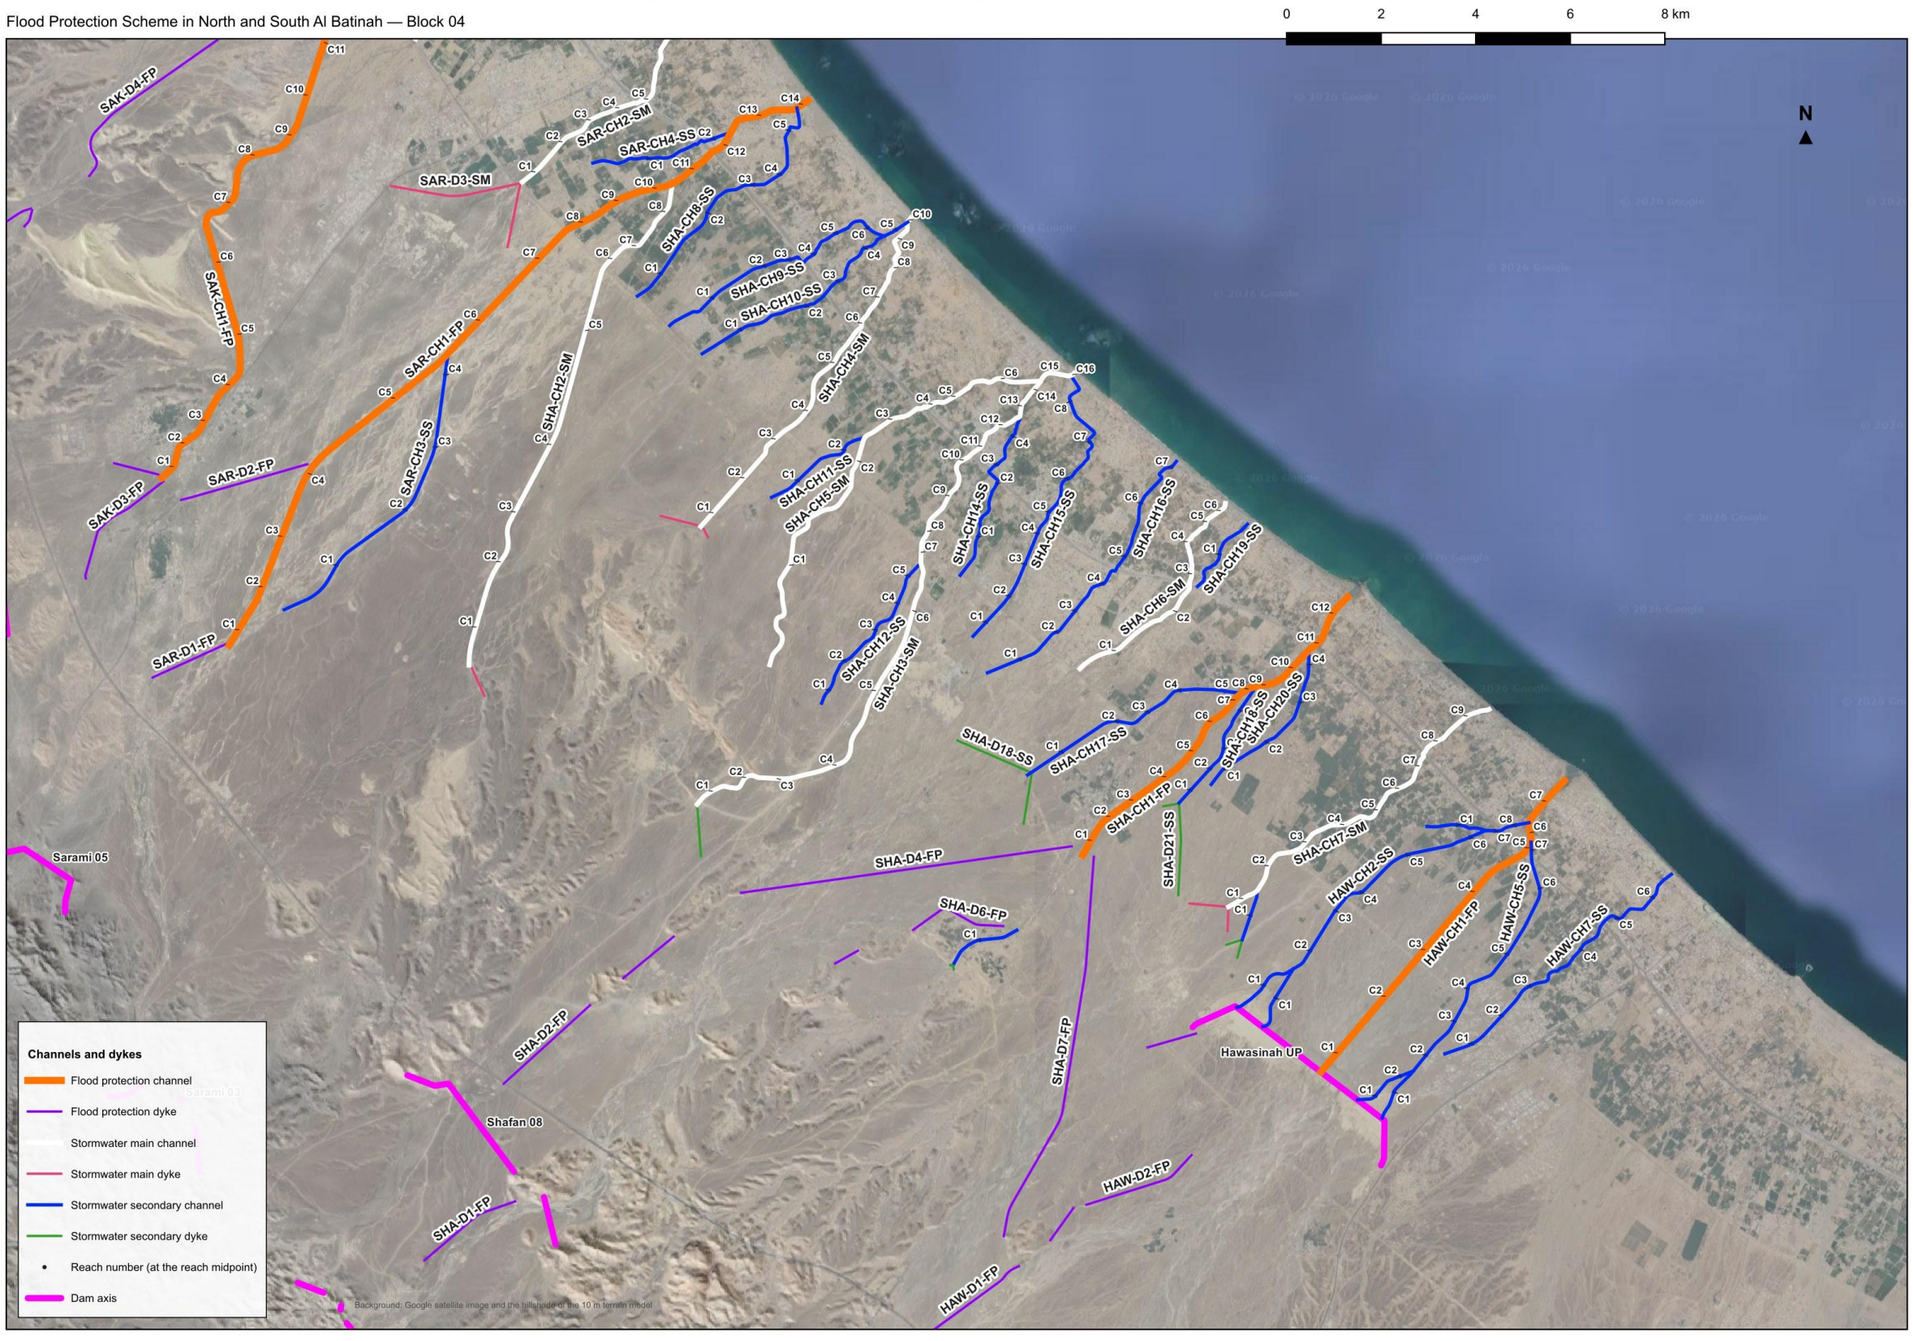


Figure 35 – Channels by class with their names and the reach numbers of the hydraulic model: Shafan catchment

Channels and reach numbers: Sarami catchment (4 channels, 26 reaches)

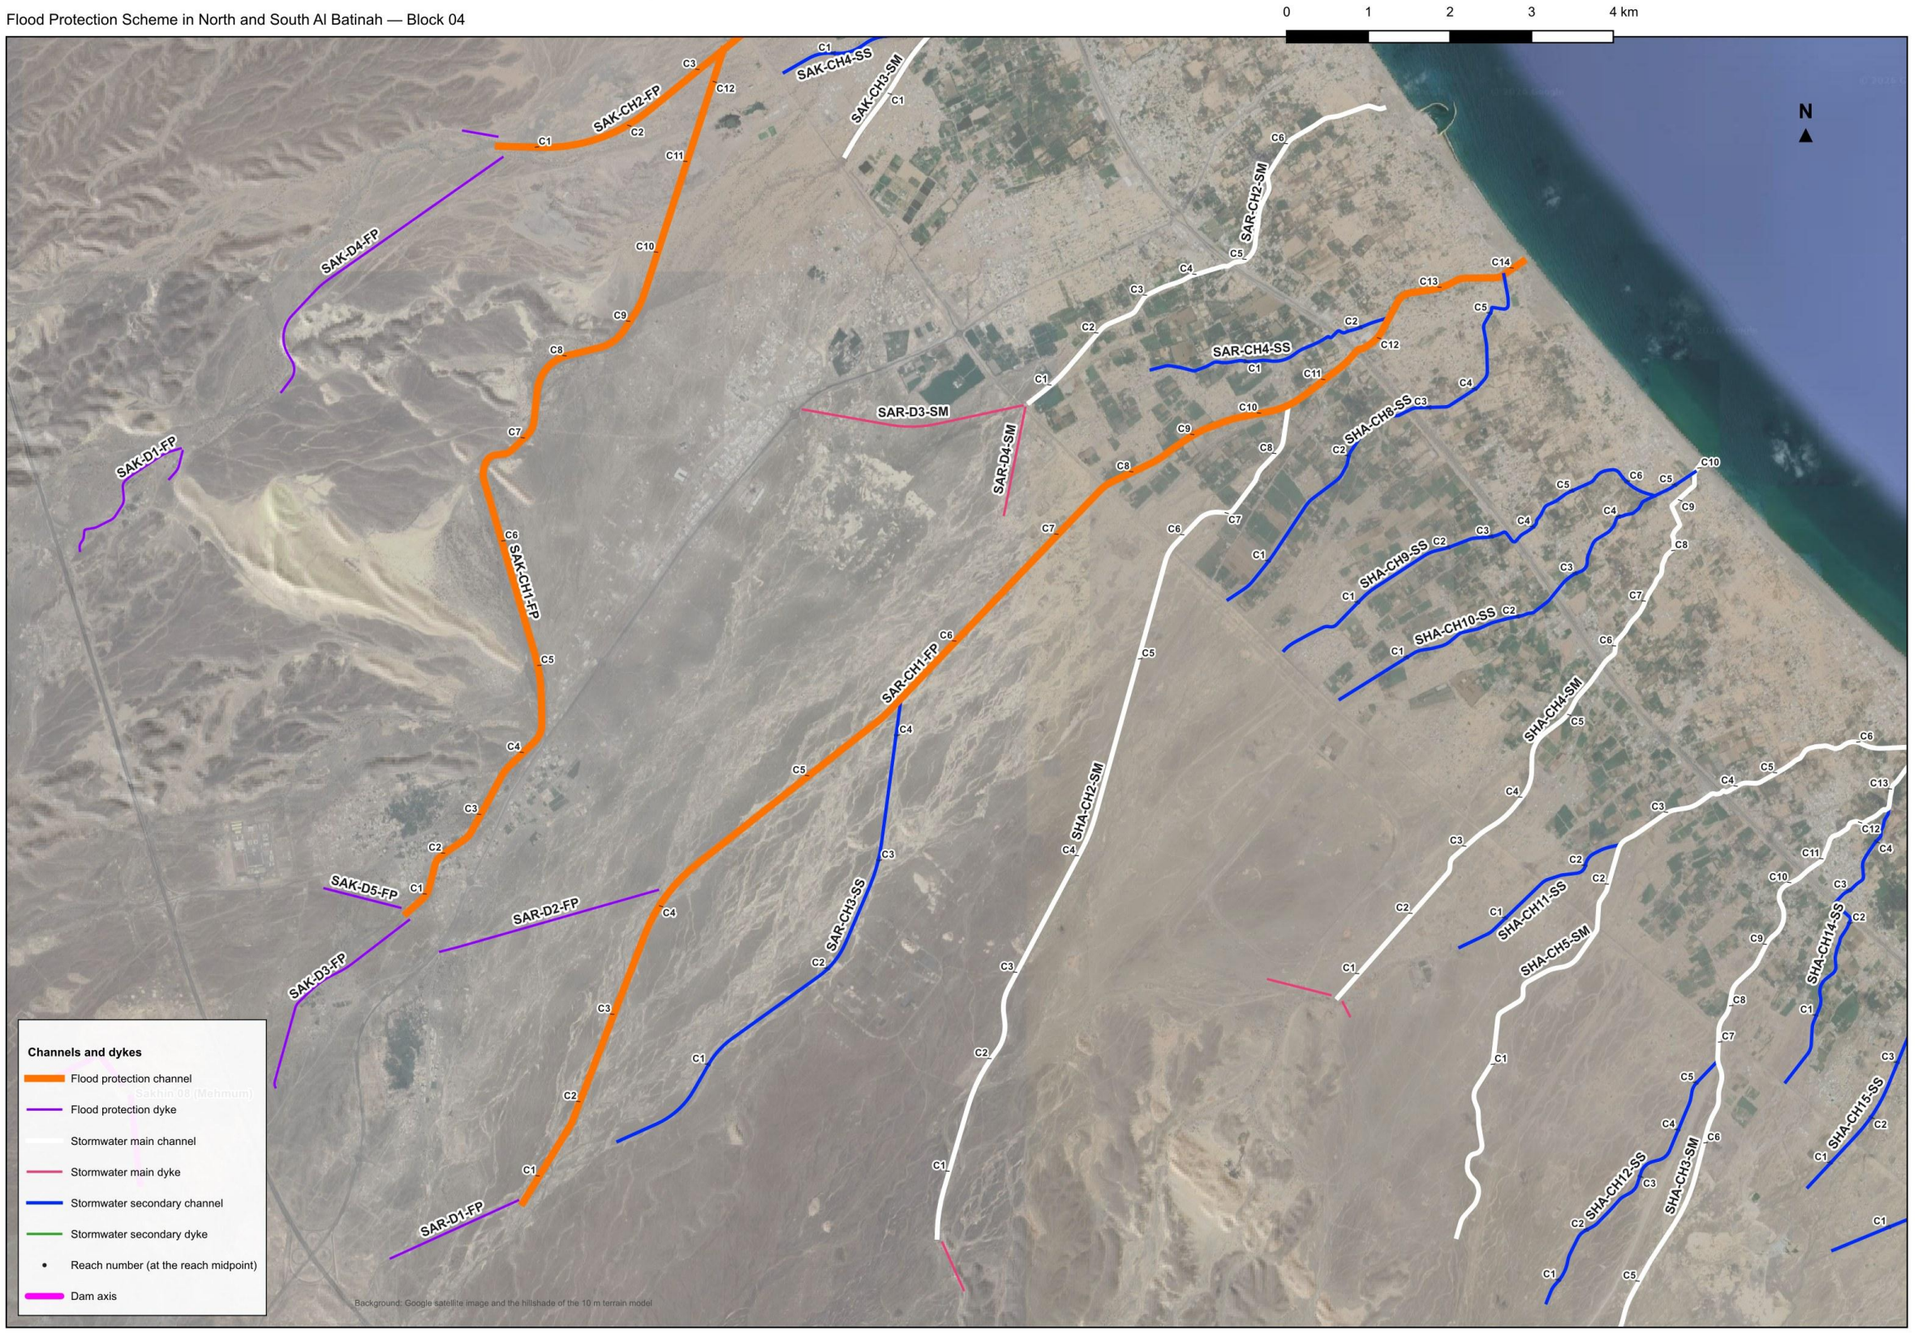


Figure 36 – Channels by class with their names and the reach numbers of the hydraulic model: Sarami catchment

Channels and reach numbers: Sakhin catchment (5 channels, 29 reaches)

Flood Protection Scheme in North and South Al Batinah — Block 04

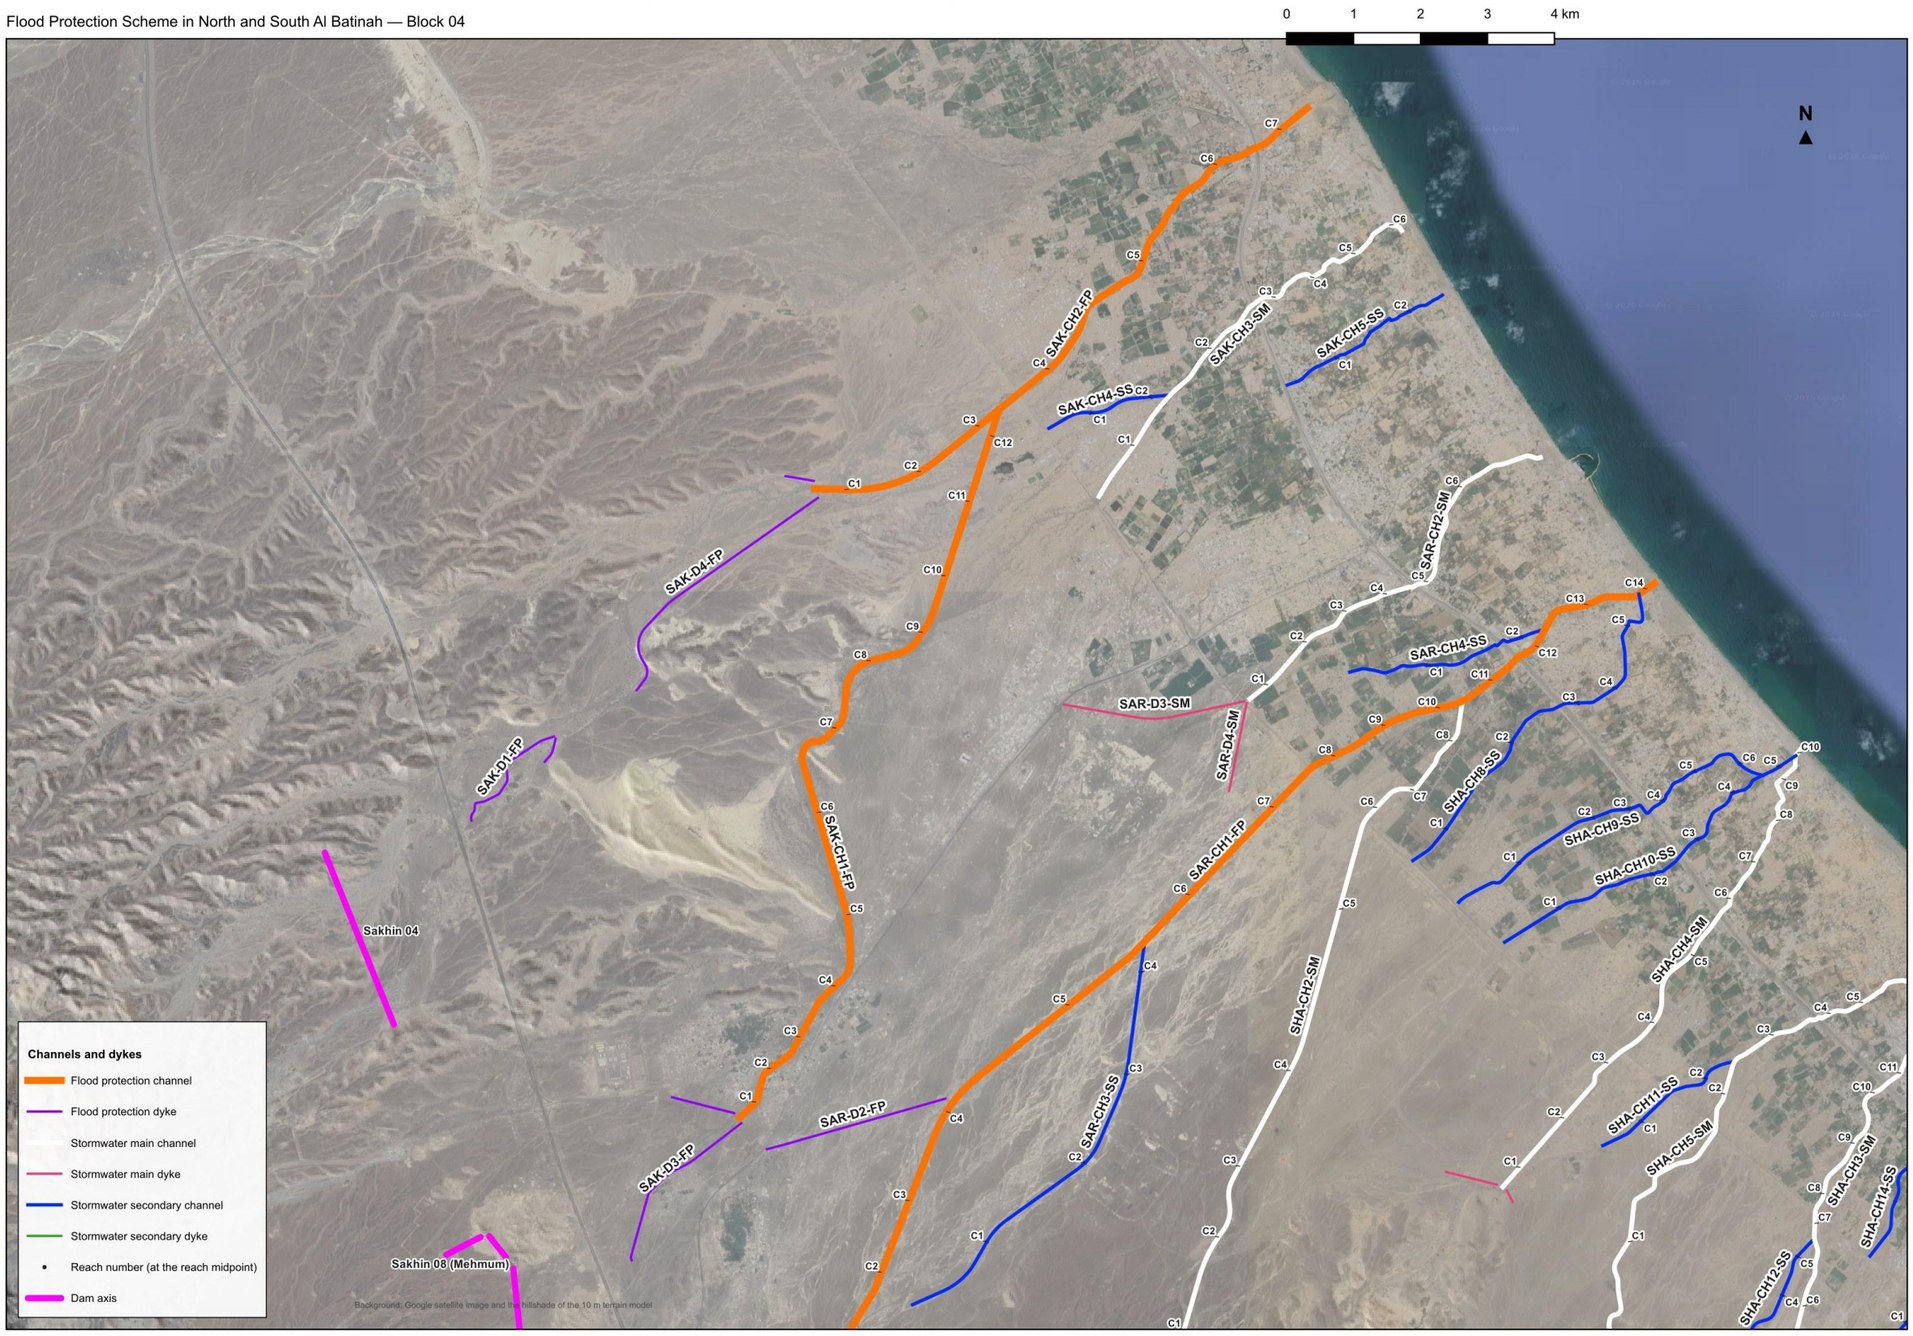


Figure 37 – Channels by class with their names and the reach numbers of the hydraulic model: Sakhin catchment

9. OUTFALLS

The thirteen outfalls of the channel network to the sea receive, in the 200-year event, between 57 and 1,291 m^3/s with the dams in operation. Without the dams the three largest outfalls would carry 4,492, 2,476 and 2,428 m^3/s; the reservoirs cut them to 217, 1,022 and 938 m^3/s. The outfalls fed by the plain alone are unchanged. The 200-year volumes fall likewise, from 390.3 to 146.7 Mm^3 over the thirteen outfalls.

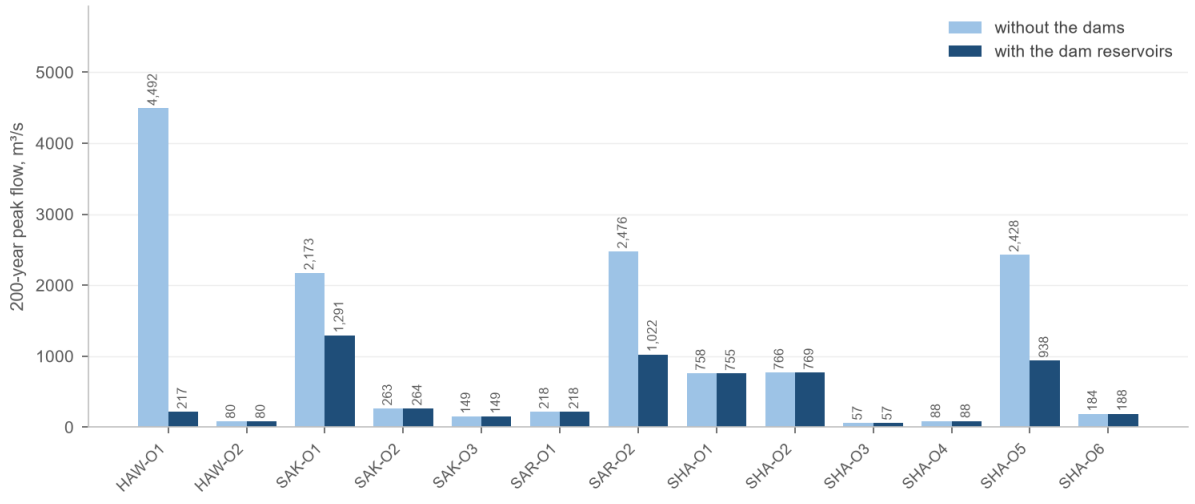


Figure 38 – 200-year peak flow at the thirteen outfalls without and with the dams

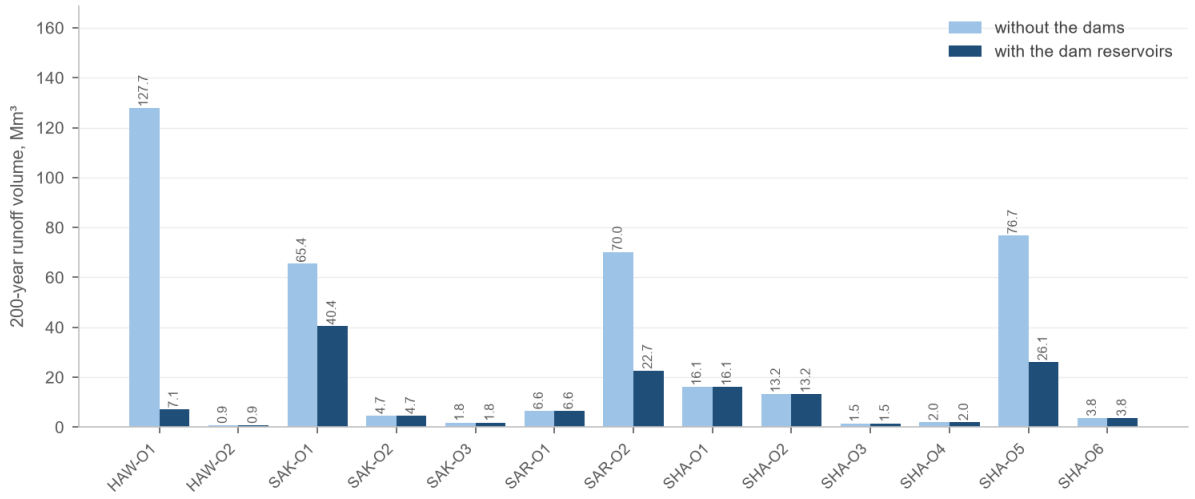


Figure 39 – 200-year runoff volume at the thirteen outfalls without and with the dams

Figure 40 locates the outfalls with, at each, the designed invert level I, the existing terrain level Fix and their difference; the invert is printed in red where it lies below the existing terrain. Table 25 gives, for each outfall, the 200-year flow and bed width of its last reach, its invert and ground level, the flow depth and the invert against the mean higher high water of 0.70 m at Al Khaburah.

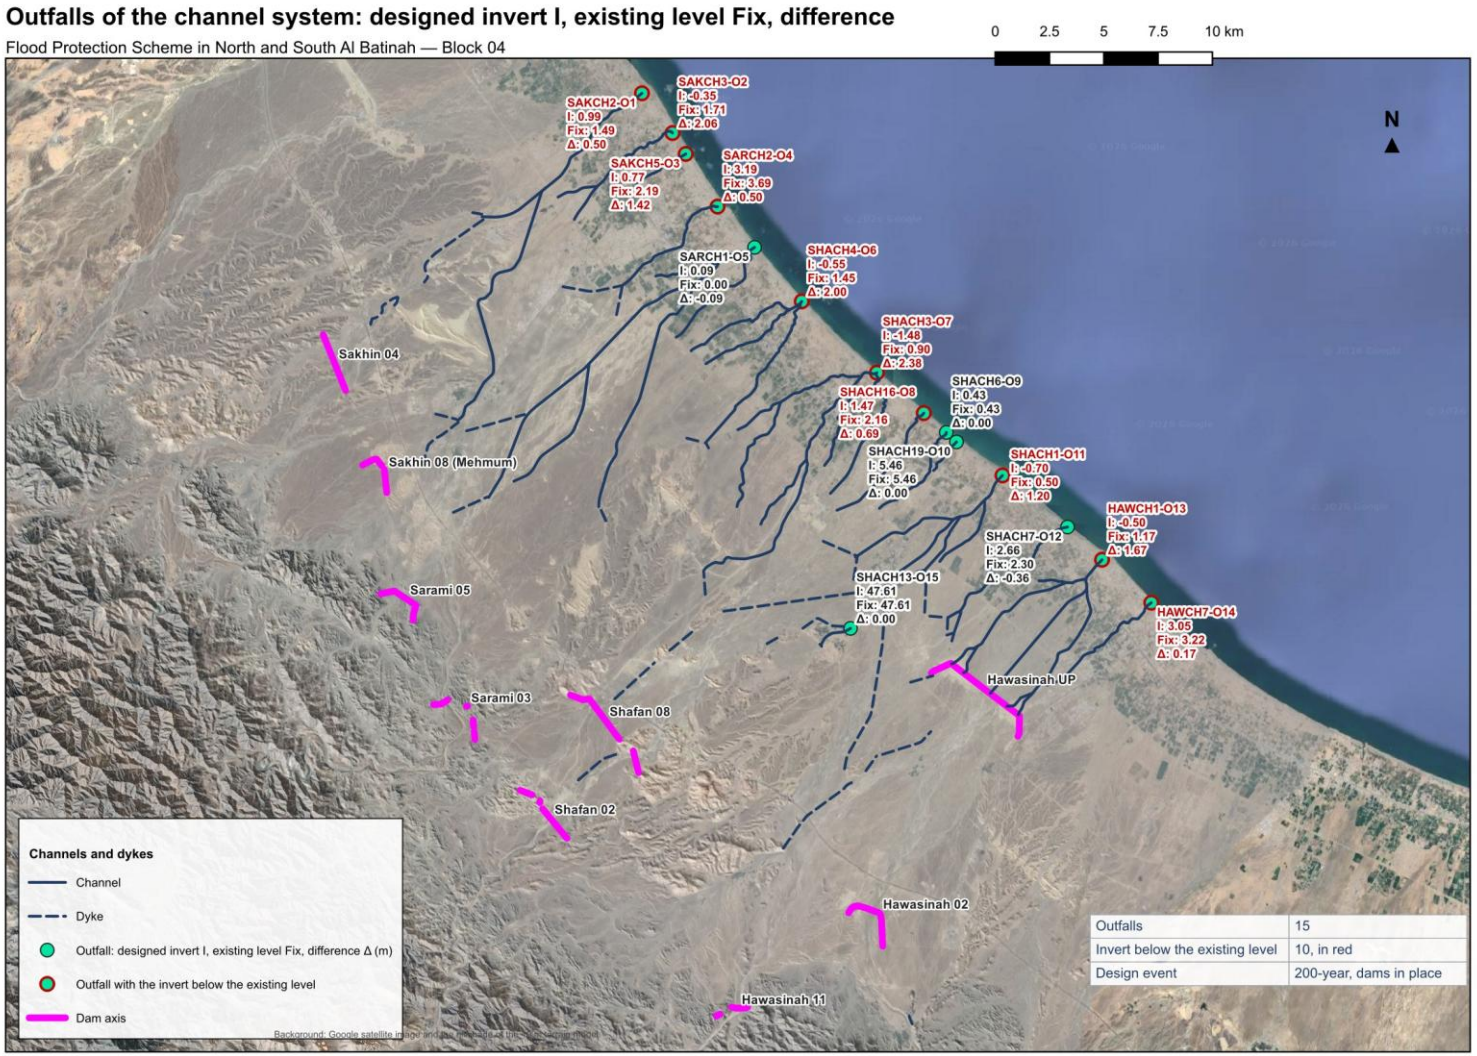


Figure 40 – Outfalls of the channel system: designed invert, existing terrain level and their difference (m)

Table 25 – Outfalls: 200-year flow, bed width, levels and tidal margin

Outfall	Channel	Q200 (m^3/s)	Bed width (m)	Invert (m)	Ground (m)	Flow depth (m)	Invert – MHHW (m)
HAWCH1-O13	HAW-CH1-FP	299	89.5	-0.50	2.50	1.05	-1.20
HAWCH7-O14	HAW-CH7-SS	80	29	3.05	5.82	0.92	2.35
SAKCH2-O1	SAK-CH2-FP	1,461	488	0.99	3.49	0.97	0.29
SAKCH3-O2	SAK-CH3-SM	264	90.5	-0.35	4.21	0.95	-1.05
SAKCH5-O3	SAK-CH5-SS	149	52.5	0.77	4.99	0.94	0.07
SARCH1-O5	SAR-CH1-FP	1,022	343	0.09	4.01	0.97	-0.61
SARCH2-O4	SAR-CH2-SM	333	94	3.19	5.68	1.08	2.49
SHACH1-O11	SHA-CH1-FP	996	218.5	-0.70	2.30	1.28	-1.40
SHACH13-O15	SHA-CH13-SS	313	49.5	47.61	50.11	1.60	46.91
SHACH16-O8	SHA-CH16-SS	105	37.5	1.47	4.66	0.93	0.77
SHACH19-O10	SHA-CH19-SS	0	10	5.46	7.96	0.00	4.76
SHACH3-O7	SHA-CH3-SM	795	267	-1.48	3.40	0.97	-2.18
SHACH4-O6	SHA-CH4-SM	752	253	-0.55	3.95	0.97	-1.25
SHACH6-O9	SHA-CH6-SM	154	46	0.43	2.93	1.04	-0.27
SHACH7-O12	SHA-CH7-SM	273	58	2.66	5.16	1.31	1.96

10. CULVERTS AND BRIDGES

The channels cross the Batinah Highway at 21 points and the Batinah Coastal Road at 10; the Batinah Expressway does not cross a Block 04 channel (Figure 41). Every crossing needs a structure that passes the designed section: a box culvert of the full bed width of the channel and the full channel depth as clear height, 2.5 m or 3 m, with the road embankment built above it.

Existing culverts stand at 10 of the crossings (Table 26); none has the width of the channel it would serve, and the other crossings have no structure. All are to be replaced or added.

Table 26 – Existing culverts at the crossings

ID	Road	Channel	Station (m)	Existing type	Cells x width x height (m)	Barrels
1	Batinah Coastal Road	HAW-CH1-FP	8,194	–	–	–
2	Batinah Highway	HAW-CH1-FP	6,398	Culvert	1x2x2	1
3	Batinah Highway	HAW-CH2-SS	7,120	–	–	–
4	Batinah Highway	HAW-CH5-SS	6,770	–	–	–
5	Batinah Highway	HAW-CH7-SS	4,562	–	–	–
6	Batinah Coastal Road	SHA-CH1-FP	8,039	–	–	–
7	Batinah Highway	SHA-CH1-FP	6,696	–	–	–
8	Batinah Highway	SHA-CH3-SM	10,761	Culvert	2x2x1	1
9	Batinah Coastal Road	SHA-CH4-SM	8,273	–	–	–
10	Batinah Highway	SHA-CH4-SM	5,334	–	–	–
11	Batinah Highway	SHA-CH5-SM	7,208	Culvert	3x1.5x1	1
12	Batinah Coastal Road	SHA-CH6-SM	5,159	–	–	–
13	Batinah Highway	SHA-CH6-SM	2,995	–	–	–
14	Batinah Coastal Road	SHA-CH7-SM	7,395	–	–	–
15	Batinah Highway	SHA-CH7-SM	5,708	Culvert	1x2x1	1
16	Batinah Highway	SHA-CH8-SS	3,326	–	–	–
17	Batinah Highway	SHA-CH9-SS	3,355	–	–	–
18	Batinah Highway	SHA-CH10-SS	2,974	Culvert	1x2x1	1
19	Batinah Highway	SHA-CH14-SS	2,539	Culvert	2x2x1	1
20	Batinah Highway	SHA-CH15-SS	2,910	Culvert	2x2x1	1
21	Batinah Coastal Road	SHA-CH16-SS	6,414	–	–	–
22	Batinah Highway	SHA-CH16-SS	3,634	Culvert	2x2x1	1
23	Batinah Coastal Road	SHA-CH19-SS	1,807	–	–	–
24	Batinah Coastal Road	SAR-CH1-FP	17,542	–	–	–
25	Batinah Highway	SAR-CH1-FP	15,072	–	–	–
26	Batinah Coastal Road	SAR-CH2-SM	6,132	–	–	–
27	Batinah Highway	SAR-CH2-SM	3,086	Culvert	3x2x1	1
28	Batinah Highway	SAR-CH4-SS	2,398	Culvert	1x2x1	1
29	Batinah Coastal Road	SAK-CH2-FP	9,768	–	–	–
30	Batinah Highway	SAK-CH2-FP	8,799	–	–	–
31	Batinah Highway	SAK-CH3-SM	3,693	–	–	–

The proposed culverts are in Table 27: box cells of 4.0 m clear width from the standard combinations of the Oman Highway Design Standard, the number of cells from the bed width, the barrel on the slope of the

channel it carries, and the headwater checked with the inlet- and outlet-control equations of the FHWA culvert design method (square-edged inlet with wingwalls, entrance loss 0.4, barrel roughness 0.015, the tailwater at the normal depth of the channel downstream): every structure keeps its headwater below 1.2 times the clear height. The length across the road is the road corridor, 45 m on the Batinah Highway and 32 m on the Coastal Road.

Table 27 – Proposed box culverts at the road crossings (200-year flow)

ID	Road	Channel	Q200 (m^3/s)	Channel W x D (m)	Cells x W x H (m)	Overall width (m)	Length (m)	Slope (m/m)	HW / H	Cost (million OMR)
1	Coastal Road	HAW-CH1-FP	299	89.5 x 3	23 x 4 x 3.0	98	32	0.0023	0.66	0.44
2	Highway	HAW-CH1-FP	174	60.5 x 2.5	16 x 4 x 2.5	68.2	45	0.0010	0.75	0.45
3	Highway	HAW-CH2-SS	215	54 x 2.5	14 x 4 x 2.5	59.8	45	0.0019	0.75	0.36
4	Highway	HAW-CH5-SS	199	44.5 x 2.5	12 x 4 x 2.5	51.2	45	0.0036	0.75	0.31
5	Highway	HAW-CH7-SS	80	19.5 x 2.5	5 x 4 x 2.5	21.5	45	0.0070	0.73	0.13
6	Coastal Road	SHA-CH1-FP	996	218.5 x 3	55 x 4 x 3.0	234	32	0.0032	0.70	1.04
7	Highway	SHA-CH1-FP	996	218.5 x 2.5	55 x 4 x 2.5	234	45	0.0024	0.80	1.40
8	Highway	SHA-CH3-SM	348	65 x 2.5	17 x 4 x 2.5	72.5	45	0.0041	0.86	0.48
9	Coastal Road	SHA-CH4-SM	752	253 x 2.5	64 x 4 x 2.5	272.2	32	0.0010	0.75	1.16
10	Highway	SHA-CH4-SM	560	116 x 2.5	29 x 4 x 2.5	123.5	45	0.0037	0.83	0.74
11	Highway	SHA-CH5-SM	239	46 x 2.5	12 x 4 x 2.5	51.2	45	0.0066	0.85	0.34
12	Coastal Road	SHA-CH6-SM	154	46 x 2.5	12 x 4 x 2.5	51.2	32	0.0082	0.63	0.22
13	Highway	SHA-CH6-SM	154	46 x 2.5	12 x 4 x 2.5	51.2	45	0.0014	0.75	0.31
14	Coastal Road	SHA-CH7-SM	273	58 x 2.5	15 x 4 x 2.5	64	32	0.0027	0.80	0.28
15	Highway	SHA-CH7-SM	273	56 x 2.5	14 x 4 x 2.5	59.8	45	0.0039	0.84	0.40
16	Highway	SHA-CH8-SS	76	17 x 2.5	5 x 4 x 2.5	21.5	45	0.0062	0.71	0.13
17	Highway	SHA-CH9-SS	136	47.5 x 2.5	12 x 4 x 2.5	51.2	45	0.0071	0.58	0.31
18	Highway	SHA-CH10-SS	210	57.5 x 2.5	15 x 4 x 2.5	64	45	0.0084	0.66	0.42
19	Highway	SHA-CH14-SS	113	24 x 2.5	6 x 4 x 2.5	25.8	45	0.0046	0.82	0.17
20	Highway	SHA-CH15-SS	94	20 x 2.5	5 x 4 x 2.5	21.5	45	0.0031	0.82	0.15
21	Coastal Road	SHA-CH16-SS	105	37.5 x 2.5	10 x 4 x 2.5	42.8	32	0.0010	0.75	0.19
22	Highway	SHA-CH16-SS	105	25.5 x 2.5	7 x 4 x 2.5	30	45	0.0023	0.73	0.20
23	Coastal Road	SHA-CH19-SS	–	10 x 2.5	3 x 4 x 2.5	13	32	0.0024	–	0.06
24	Coastal Road	SAR-CH1-FP	1,022	343 x 2.5	86 x 4 x 2.5	365.8	32	0.0010	0.75	1.56
25	Highway	SAR-CH1-FP	1,036	209 x 2.5	53 x 4 x 2.5	225.5	45	0.0028	0.84	1.35
26	Coastal Road	SAR-CH2-SM	333	94 x 2.5	24 x 4 x 2.5	102.2	32	0.0031	0.70	0.44
27	Highway	SAR-CH2-SM	333	94 x 2.5	24 x 4 x 2.5	102.2	45	0.0067	0.66	0.67
28	Highway	SAR-CH4-SS	65	15 x 2.5	4 x 4 x 2.5	17.2	45	0.0087	0.74	0.12
29	Coastal Road	SAK-CH2-FP	1,461	488 x 2.5	122 x 4 x 2.5	518.8	32	0.0010	0.75	2.21
30	Highway	SAK-CH2-FP	1,461	488 x 2.5	122 x 4 x 2.5	518.8	45	0.0010	0.75	3.09
31	Highway	SAK-CH3-SM	259	60 x 2.5	15 x 4 x 2.5	64	45	0.0023	0.77	0.39
	Total				**868 cells**					**19.51**

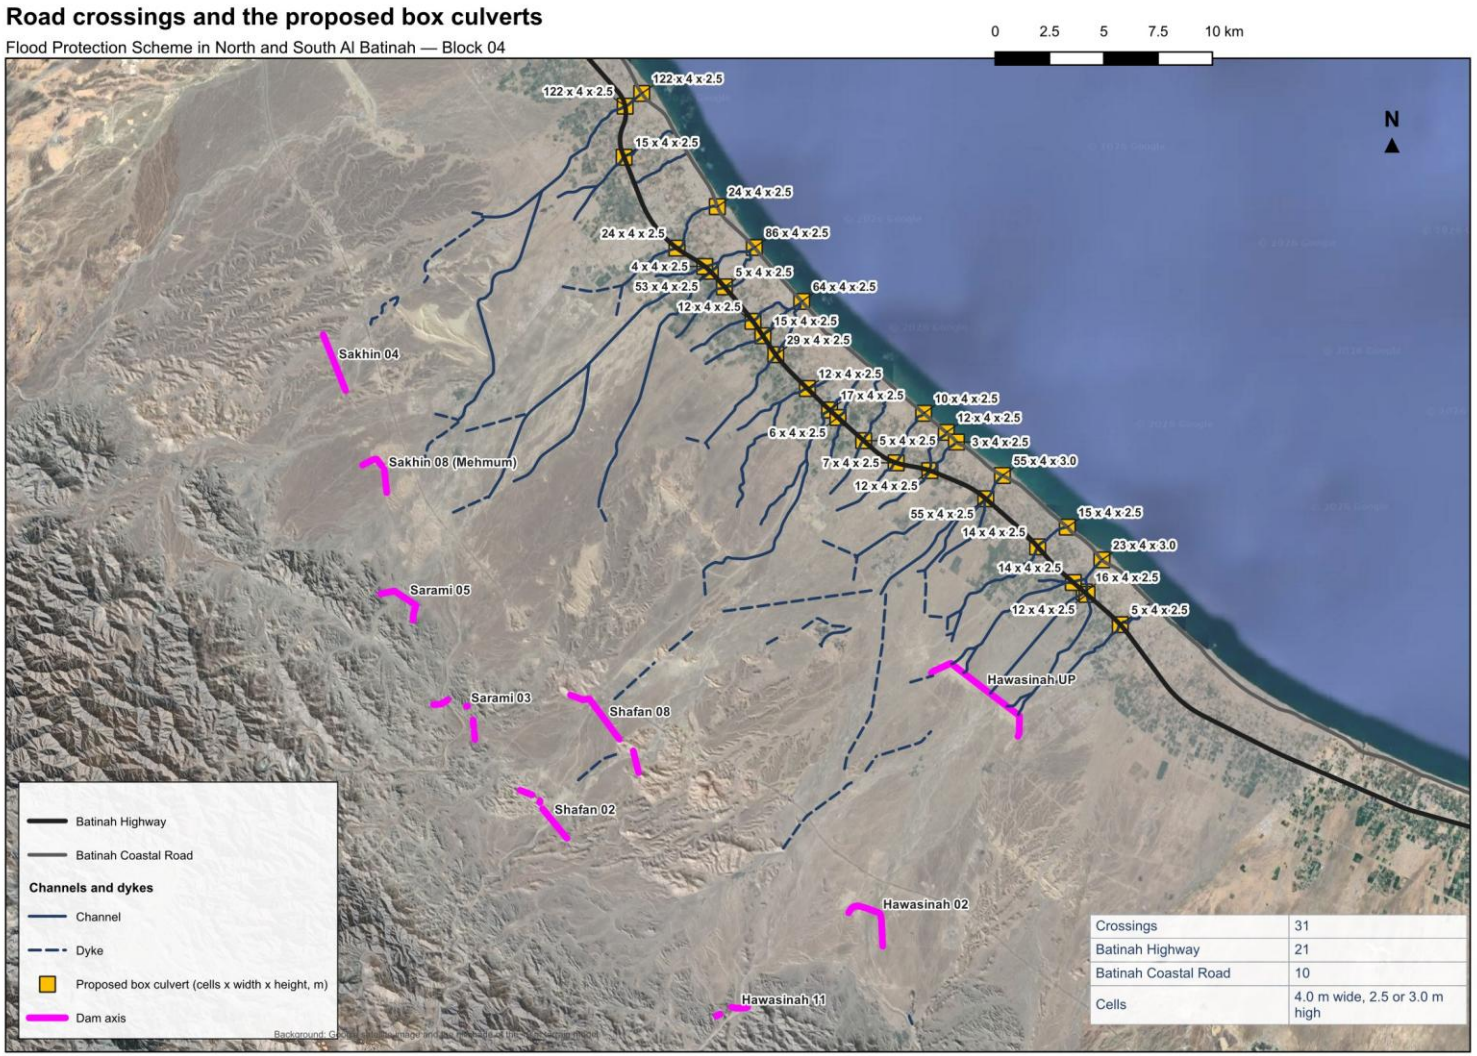


Figure 41 – Road crossings and the proposed box culverts

11. DYKES

The dykes keep the flood from spreading before it reaches the channels and lead it to their entrances. The 36 dykes, 62.5 km in all, stand 1.6 to 4.5 m high (Table 28, Figure 42); the highest, HAW-D3-FP, closes a ponding area where the 200-year depth reaches 7.6 m.

Table 28 – Dykes: 200-year depth along the line, adopted height and cost

ID	Dyke	Class	Length (m)	Depth, mean (m)	Depth, 90 % (m)	Depth, max (m)	Height (m)	Cost (million OMR)
1	HAW-D1-FP	Flood protection	4,416	0.95	1.81	3.06	2.1	0.59
2	HAW-D2-FP	Flood protection	2,519	0.70	1.34	1.88	1.8	0.28
3	HAW-D3-FP	Flood protection	382	3.37	6.50	7.61	4.5	0.12
4	SHA-D1-FP	Flood protection	2,320	1.06	2.29	3.40	2.2	0.32
5	SHA-D2-FP	Flood protection	2,466	1.05	1.74	3.05	2.2	0.34
6	SHA-D3-FP	Flood protection	1,384	0.42	0.81	1.41	1.6	0.14
7	SHA-D4-FP	Flood protection	7,064	0.75	1.34	3.31	1.9	0.84
8	SHA-D5-FP	Flood protection	548	0.71	1.07	1.63	1.9	0.07
9	SHA-D6-FP	Flood protection	2,131	0.80	1.64	2.48	2.0	0.27
10	SHA-D7-FP	Flood protection	8,370	0.82	1.37	3.03	2.0	1.06
11	SHA-D8-FP	Flood protection	838	0.67	1.18	2.58	1.8	0.10
12	SHA-D9-FP	Flood protection	1,063	0.62	1.10	1.71	1.8	0.12
13	SHA-D10-SM	Stormwater main	638	1.99	2.69	3.51	3.1	0.13
14	SHA-D11-SM	Stormwater main	787	0.82	1.80	2.14	2.0	0.10
15	SHA-D12-SM	Stormwater main	194	0.94	2.00	2.31	2.1	0.03
16	SHA-D13-SM	Stormwater main	758	0.78	1.16	1.69	1.9	0.09
17	SHA-D14-SM	Stormwater main	470	0.62	0.93	1.38	1.8	0.05
18	SHA-D15-SS	Stormwater secondary	1,058	0.44	0.74	1.16	1.6	0.11
19	SHA-D16-SS	Stormwater secondary	47	1.77	3.09	3.46	2.9	0.01
20	SHA-D17-SS	Stormwater secondary	72	2.49	3.27	3.49	3.6	0.02
21	SHA-D18-SS	Stormwater secondary	1,668	0.59	0.94	1.75	1.7	0.18
22	SHA-D19-SS	Stormwater secondary	1,069	0.76	1.15	1.53	1.9	0.13
23	SHA-D20-SS	Stormwater secondary	309	1.25	1.51	1.76	2.4	0.05
24	SHA-D21-SS	Stormwater secondary	1,920	0.60	1.04	1.77	1.8	0.22
25	SHA-D22-SS	Stormwater secondary	300	0.94	1.21	1.82	2.1	0.04
26	SHA-D23-SS	Stormwater secondary	353	1.02	1.50	1.93	2.2	0.05
27	SAR-D1-FP	Flood protection	1,713	2.40	4.32	5.48	3.5	0.41
28	SAR-D2-FP	Flood protection	2,771	0.97	1.44	1.94	2.1	0.37
29	SAR-D3-SM	Stormwater main	2,734	1.01	1.88	2.45	2.2	0.38
30	SAR-D4-SM	Stormwater main	1,337	0.99	1.42	2.06	2.1	0.18
31	SAK-D1-FP	Flood protection	1,948	1.54	2.36	2.87	2.7	0.34
32	SAK-D2-FP	Flood protection	389	2.13	3.63	4.28	3.3	0.09
33	SAK-D3-FP	Flood protection	2,780	1.10	1.86	2.49	2.3	0.41
34	SAK-D4-FP	Flood protection	4,272	1.12	1.78	3.74	2.3	0.62
35	SAK-D5-FP	Flood protection	958	1.05	1.97	3.08	2.2	0.13
36	SAK-D6-FP	Flood protection	425	1.49	2.02	3.31	2.6	0.07
	Total		**62,472**					**8.45**

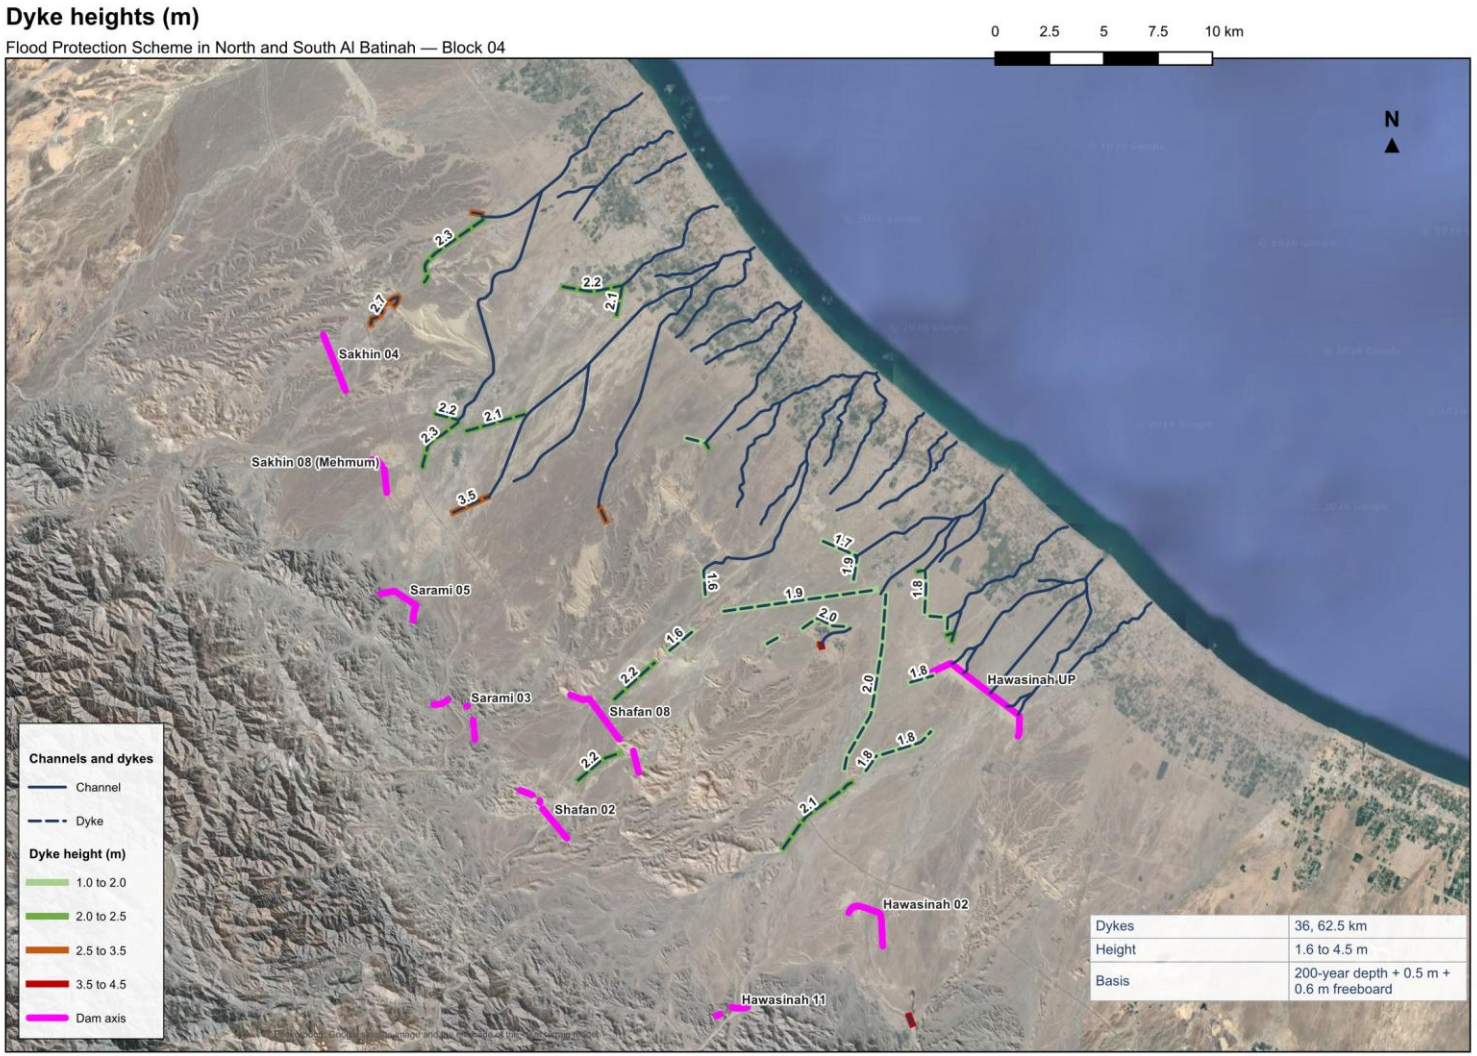


Figure 42 – Dyke heights (m)

12. QUANTITIES AND COST ESTIMATE

The quantities of the channels are measured on the designed sections against the 5 m terrain model, reach by reach: the channel surface of the typical sections is built along each reach at its bed width, depth and invert, and the excavation and the fill are the volumes between that surface and the ground. The riprap is the two side slopes of every reach, 0.3 m thick as priced; the clearing is the footprint of the works. The dykes follow the typical fill section at their height, with a 0.4 m strip under the footprint. The culverts are priced by their concrete and reinforcement, blinding, waterproofing, the road works over them and the removal of the existing structure. The unit rates are those of the master plan estimate (Table 29).

Table 29 – Unit rates of the estimate

Item	Unit	Rate (OMR)
Clearing and grubbing	m^2	0.30
Excavation	m^3	2.10
Embankment and dyke fill	m^3	4.00
Riprap, 0.3 m, over geotextile	m^3	13.20
Reinforced concrete of the culverts	m^3	106.90
Reinforcement, 120 kg/m^3	t	417.10
Blinding concrete	m^3	45.00
Pavement and road works over the culverts	m^2	per the master plan build-up

Table 30 – Channels: earthworks, protection, land and cost

Channel	Length (km)	Cut (m^3)	Fill (m^3)	Clearing (m^2)	Riprap (m^2)	Corridor (ha)	In cadastral parcels (ha)	Construction (million OMR)	Land (million OMR)	Channel cost (million OMR)
HAW-CH1-FP	8.2	279,402	255,179	512,384	76,061	59.6	7.2	2.06	2.60	4.66
HAW-CH2-SS	7.7	284,665	118,442	356,432	69,611	45.6	10.7	1.45	5.64	7.10
HAW-CH3-SS	1.4	34,407	8,176	38,656	12,985	5.9	3.2	0.17	2.39	2.55
HAW-CH4-SS	1.4	29,521	11,679	37,600	12,488	5.7	1.4	0.17	1.07	1.24
HAW-CH5-SS	7.1	201,790	149,510	307,960	63,699	38.6	11.9	1.37	3.66	5.03
HAW-CH6-SS	1.3	18,146	18,181	36,964	11,451	5.2	0.3	0.17	0.17	0.34
HAW-CH7-SS	6.5	70,279	231,103	260,940	58,666	32.0	2.4	1.38	0.34	1.72
SHA-CH1-FP	8.0	2,741,405	83,713	1,603,628	74,177	172.1	28.4	6.87	12.18	19.05
SHA-CH2-SM	11.4	1,295,420	255,770	1,289,028	103,096	142.6	28.2	4.54	1.49	6.03
SHA-CH3-SM	13.9	935,017	250,959	947,084	125,114	110.2	41.6	3.75	18.12	21.87
SHA-CH4-SM	8.3	935,549	434,802	1,105,468	74,616	119.0	49.4	4.33	18.43	22.76
SHA-CH5-SM	9.9	228,971	440,011	528,072	89,399	62.2	16.8	2.75	2.86	5.61
SHA-CH6-SM	5.2	256,293	89,076	277,972	46,509	34.3	9.0	1.16	1.75	2.92
SHA-CH7-SM	7.4	433,881	107,988	452,204	66,764	54.4	18.0	1.74	3.34	5.08
SHA-CH8-SS	5.9	85,437	153,499	220,188	53,050	28.3	2.2	1.07	1.14	2.21
SHA-CH9-SS	5.5	215,715	86,016	278,096	49,485	34.1	18.3	1.08	7.98	9.05
SHA-CH10-SS	5.4	278,375	135,148	363,000	48,447	42.1	23.2	1.43	3.93	5.36
SHA-CH11-SS	2.4	33,674	77,014	104,840	21,884	12.8	2.6	0.50	1.09	1.58
SHA-CH12-SS	3.8	42,504	62,774	109,812	34,016	15.5	3.6	0.51	2.14	2.65
SHA-CH13-SS	1.6	7,624	84,735	116,760	14,804	13.2	0.8	0.45	0.47	0.92

Channel	Length (km)	Cut (m^3)	Fill (m^3)	Clearing (m^2)	Riprap (m^2)	Corridor (ha)	In cadastral parcels (ha)	Construction (million OMR)	Land (million OMR)	Channel cost (million OMR)
SHA-CH14-SS	3.9	122,566	33,845	142,644	35,561	19.5	4.2	0.58	0.85	1.42
SHA-CH15-SS	6.8	197,589	148,719	256,076	61,372	33.4	10.0	1.33	3.12	4.45
SHA-CH16-SS	6.4	211,673	98,540	257,820	57,926	33.7	16.5	1.15	6.33	7.47
SHA-CH17-SS	5.1	273,863	66,288	279,048	46,053	34.1	1.0	1.11	0.29	1.39
SHA-CH18-SS	3.0	188,252	44,647	166,828	27,220	20.5	1.3	0.73	0.92	1.65
SHA-CH19-SS	1.8	12,829	46,995	55,608	16,335	7.4	3.6	0.30	0.54	0.84
SHA-CH20-SS	3.8	167,876	28,049	161,444	33,855	21.1	1.1	0.65	0.09	0.74
SHA-CH21-SS	1.1	32,088	5,883	29,240	9,817	4.6	0.7	0.14	0.45	0.59
SAR-CH1-FP	17.6	3,006,668	199,735	2,076,232	158,238	230.4	46.0	8.36	16.32	24.68
SAR-CH2-SM	6.1	344,096	276,135	607,840	55,373	66.7	28.6	2.23	7.11	9.34
SAR-CH3-SS	6.9	527,563	68,169	431,584	61,901	51.9	0.2	1.75	0.14	1.90
SAR-CH4-SS	3.1	9,827	147,238	117,532	27,987	14.3	1.7	0.76	0.53	1.28
SAK-CH1-FP	12.5	1,775,563	390,660	1,650,172	112,387	179.1	15.6	6.23	7.30	13.53
SAK-CH2-FP	9.8	2,740,657	341,021	2,500,284	88,172	260.4	104.9	8.22	25.70	33.92
SAK-CH3-SM	6.5	387,049	134,353	495,124	58,354	57.4	17.2	1.73	2.96	4.69
SAK-CH4-SS	1.9	19,777	39,705	57,960	17,320	7.9	0.0	0.29	0.00	0.29
SAK-CH5-SS	2.8	123,512	31,194	133,564	25,004	16.7	10.9	0.52	4.35	4.88
Total	**221.3**	**18,549,523**	**5,154,951**	**18,366,088**	**1,999,197**	**2,092.6**		**73.00**	**167.80**	**240.80**

The corridors of the channels, the bed with the embankments and an access road on each side, take 2,093 ha, of which 543 ha lie in the parcels of the cadastre (Table 31). The land is priced at the rates of the master plan's estimate of expropriation: agricultural land 50 000 OMR/ha, residential 755 000 OMR/ha, commercial 1.49 million OMR/ha and industrial 1.5 million OMR/ha; government, planned and vacant land carries no cost. The land of the corridors comes to 167.8 million OMR.

Table 31 – Land take of the channel corridors by land use of the cadastre and its cost

Land use	Area (ha)	Rate (OMR/ha)	Cost (million OMR)
Agricultural	290.3	50,189	14.57
Residential	191.7	754,797	144.68
Government	32.7	0	0.00
Other	17.8	0	0.00
Commercial	4.6	1,486,900	6.78
Not Classified	3.4	0	0.00
Residential Commercial	2.3	754,797	1.77
Total	**542.8**		**167.80**

Table 32 – Cost estimate of the channel scheme of Block 04 (million OMR)

Item	Quantity	Cost (million OMR)
Channels, construction	221.3 km, 37 channels	73.00
Channels, land of the corridors	2,093 ha	167.80
Dykes	62.5 km, 36 dykes	8.45
Culverts	31 structures, 868 cells	19.51
Total		**268.75**

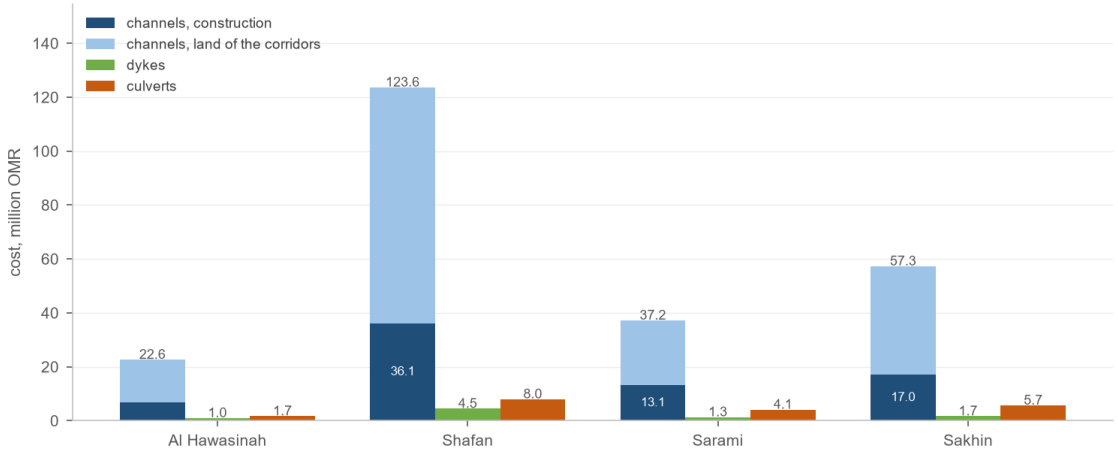


Figure 43 – Cost of the channels (construction and land), dykes and culverts by catchment

13. CONCLUSION

The HEC-HMS model of Block 04 reproduces the catchments of the hydrology study for the nine dams and extends them to the whole plain, computed as depth-area analyses for thirteen return periods up to the probable maximum precipitation. Four of the nine reservoirs hold the whole 200-year flood and two more pass only a fraction of it; Hawasinah 02 is the exception, with 2 % attenuation. At the probable maximum flood the reservoirs rise 4.7 to 5.0 m above full supply level.

The catchments deliver 90 to 185 m^3 of sediment per square kilometre and year. The reservoirs lose 1.9 to 36.9 % of their storage in 50 years; Hawasinah 02 loses 37 % and Shafan 08 20 %, and their designs should provide for sediment management, a dead storage allowance or periodic removal.

The channel alignments follow the wadis across the plain between the dams and the sea, within the constraints of the Batinah Expressway, the Batinah Highway, the coastal road, the planned bypass, the OQ pipelines and the cadastral land use. The channels are designed for the routed 200-year outflows with the criteria of Section 8; their sections (Table 23) carry the 200-year flow with bed widths of 10 to 488 m.

At the 31 crossings of the Batinah Highway and the Coastal Road the existing structures on file are far below the channel widths and box culverts of the full bed width are proposed, 868 cells of 4 m in all, checked for headwater. The 36 dykes, 62.5 km, are set at 1.6 to 4.5 m on the 200-year flood depth of the plain with a margin and the freeboard; the two-dimensional simulation of the scheme will refine them.

The estimate comes to 268.8 million OMR at the unit rates and land rates of the master plan: 73.0 million for the construction of the channels (19 million m^3 of excavation, 5.2 million m^3 of fill), 167.8 million for the land of their corridors, 8.4 million for the dykes and 19.5 million for the culverts. The long-term effectiveness of the scheme depends on the reservation of the wadi corridors against encroachment, the maintenance of the channels and crossings, and the control of sand extraction in the beds.

APPENDIX A – INFLOW HYDROGRAPHS OF THE DAMS

Inflow hydrographs of the thirteen depth-area analyses at each dam, with the peak flow and the volume of every event.

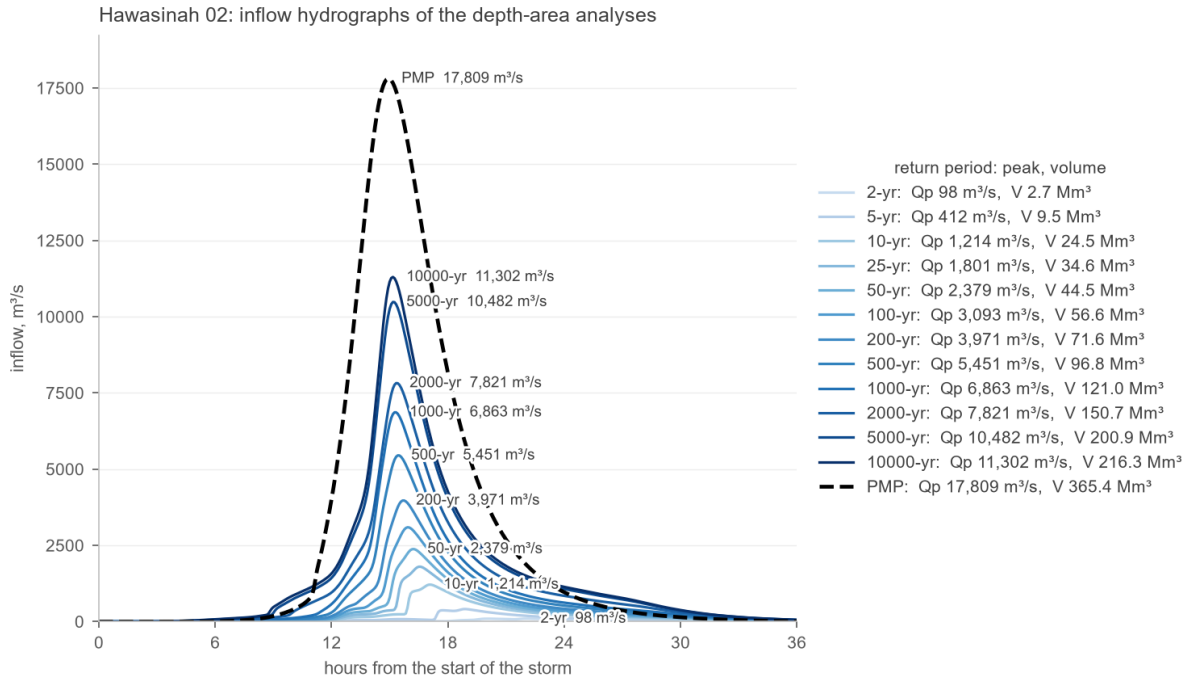


Figure 44 – Hawasinah 02: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

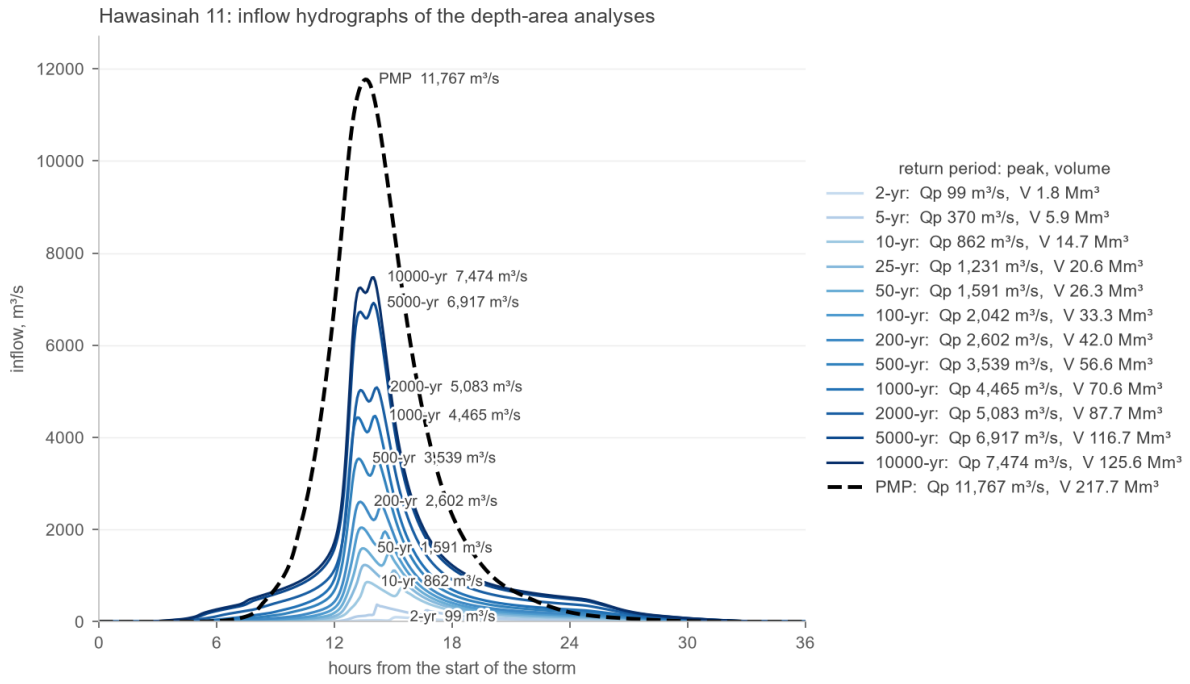


Figure 45 – Hawasinah 11: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

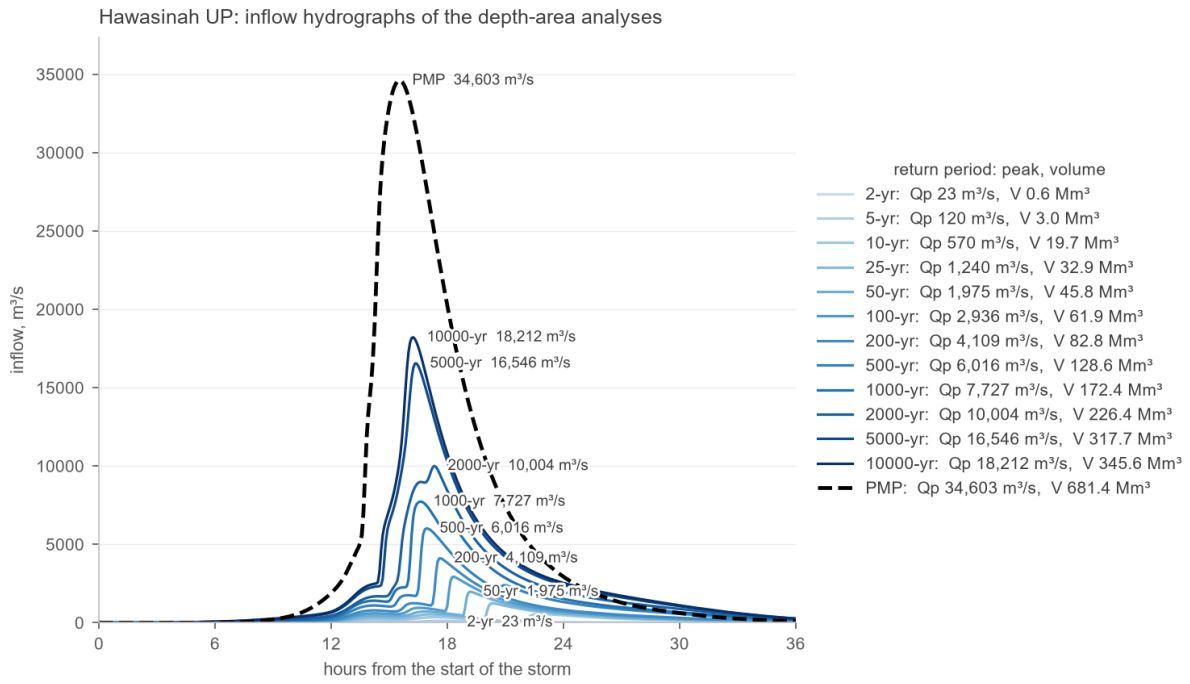


Figure 46 – Hawasinah UP: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

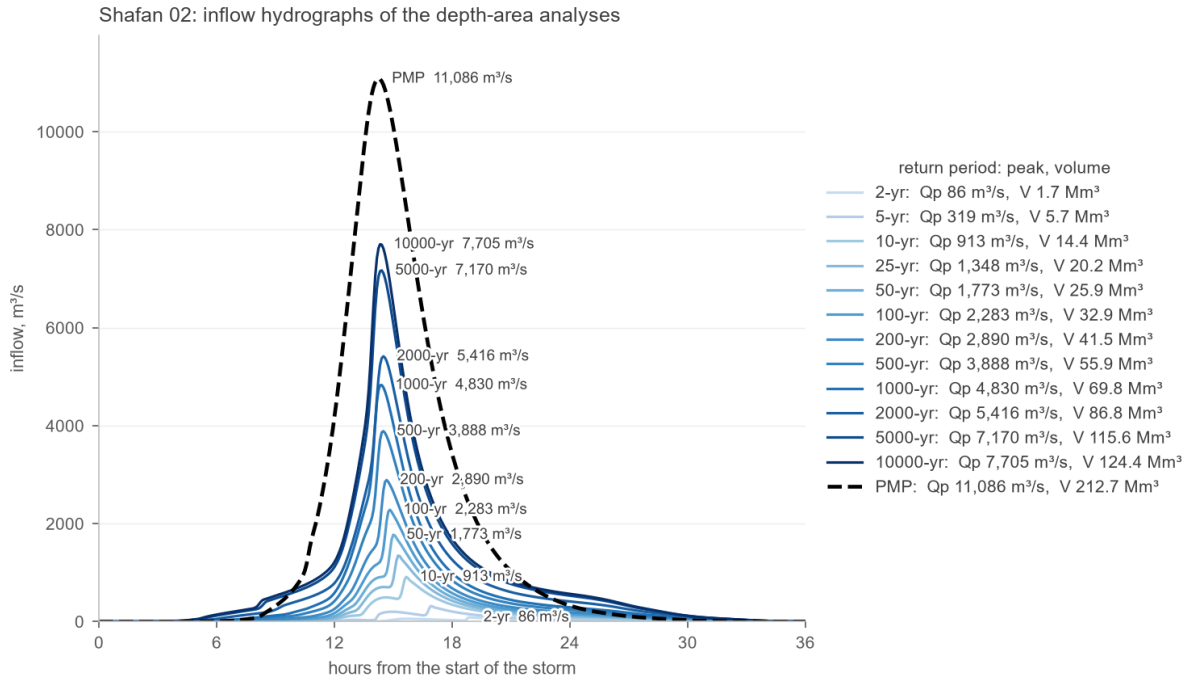


Figure 47 – Shafan 02: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

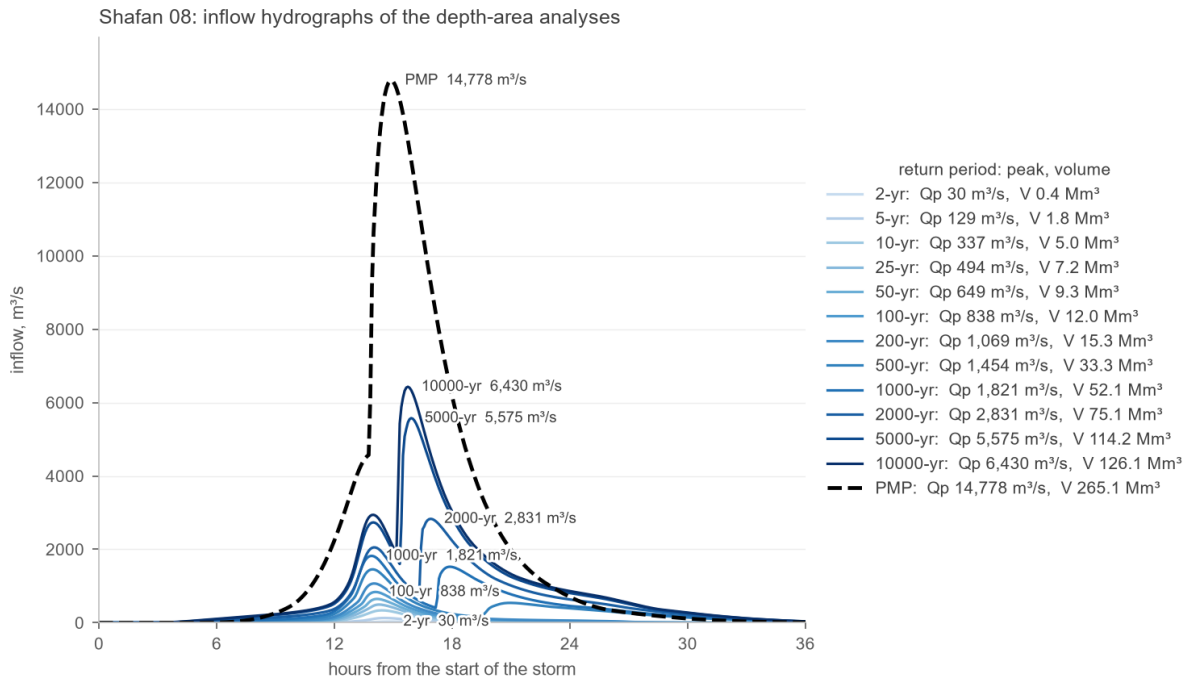


Figure 48 – Shafan 08: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

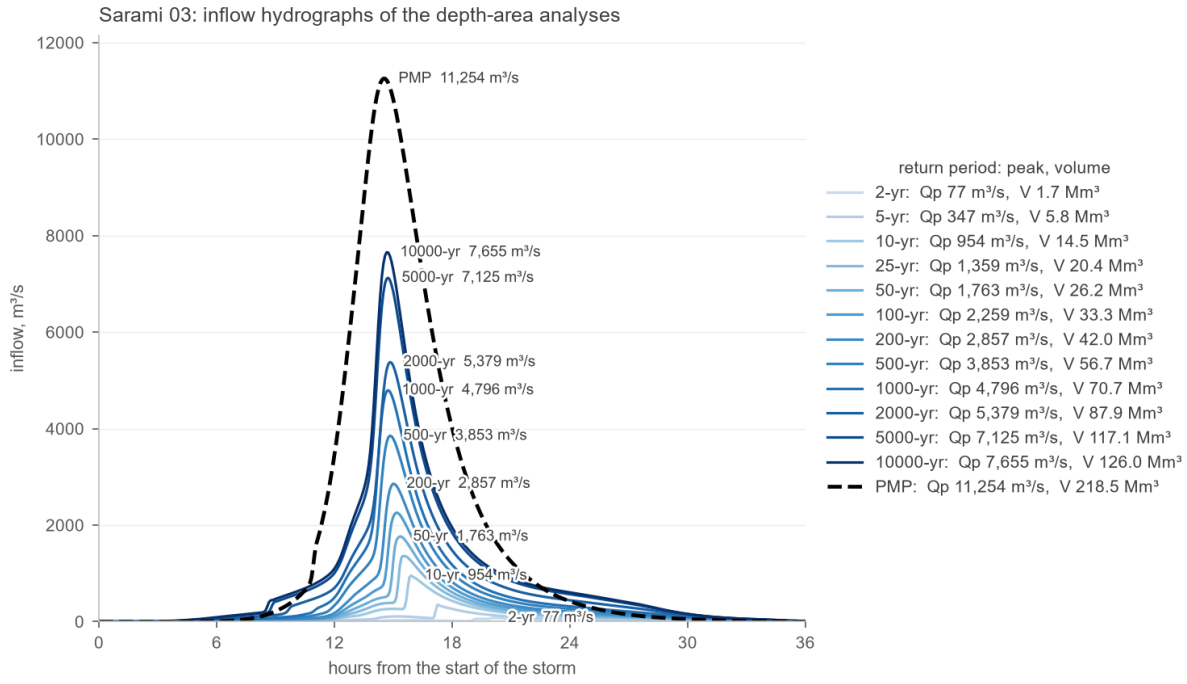


Figure 49 – Sarami 03: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

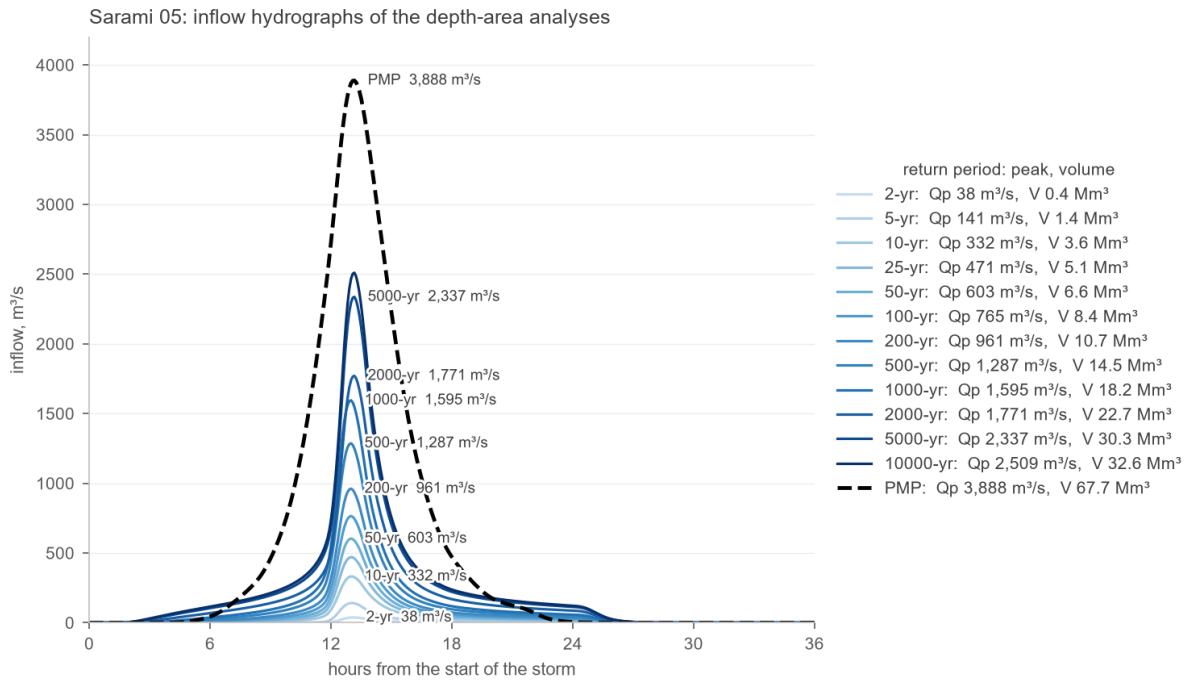


Figure 50 – Sarami 05: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

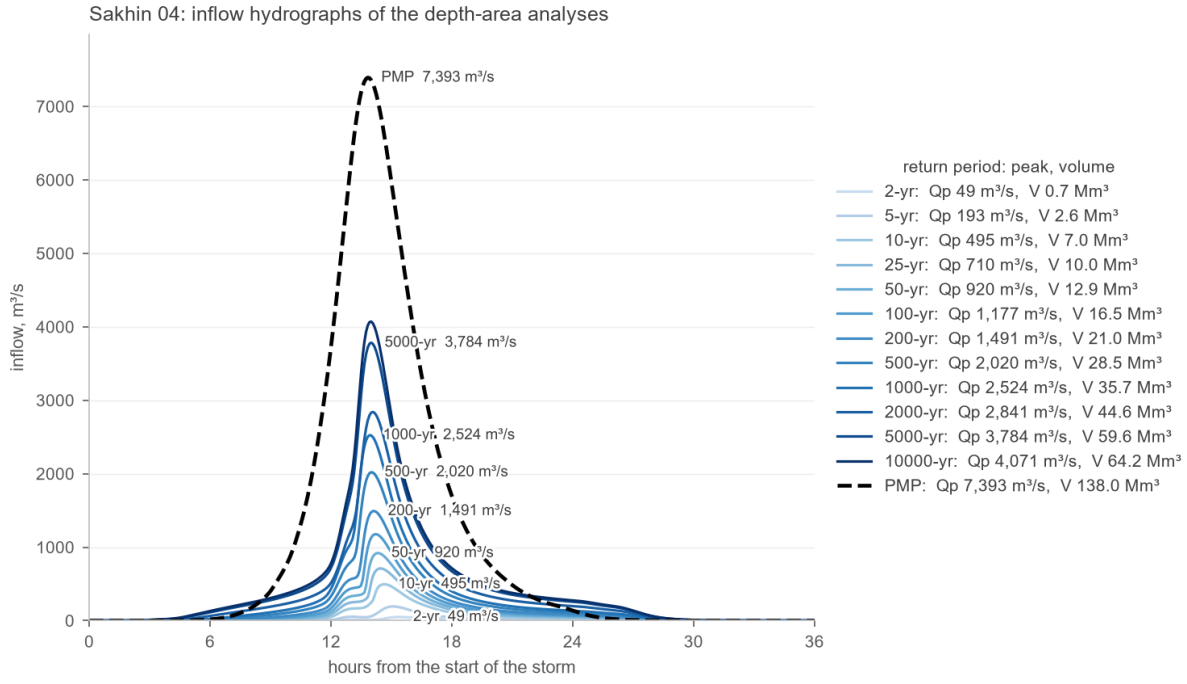


Figure 51 – Sakhin 04: inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

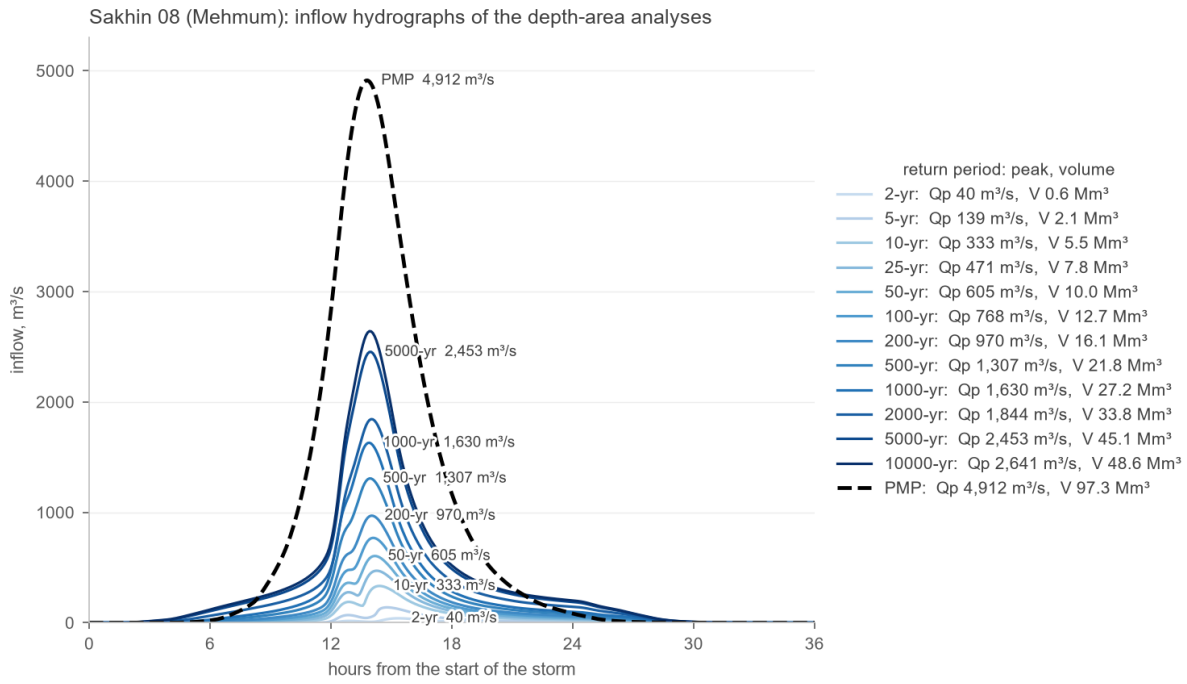


Figure 52 – Sakhin 08 (Mehmum): inflow hydrographs for the return periods of 2 to 10 000 years and the PMP

APPENDIX B – RESERVOIR CURVES AFTER SEDIMENTATION

Original and revised elevation-area-volume curves of each reservoir after 50 and 100 years of sedimentation (Section 6): capacity on the lower axis, water-surface area on the upper axis.

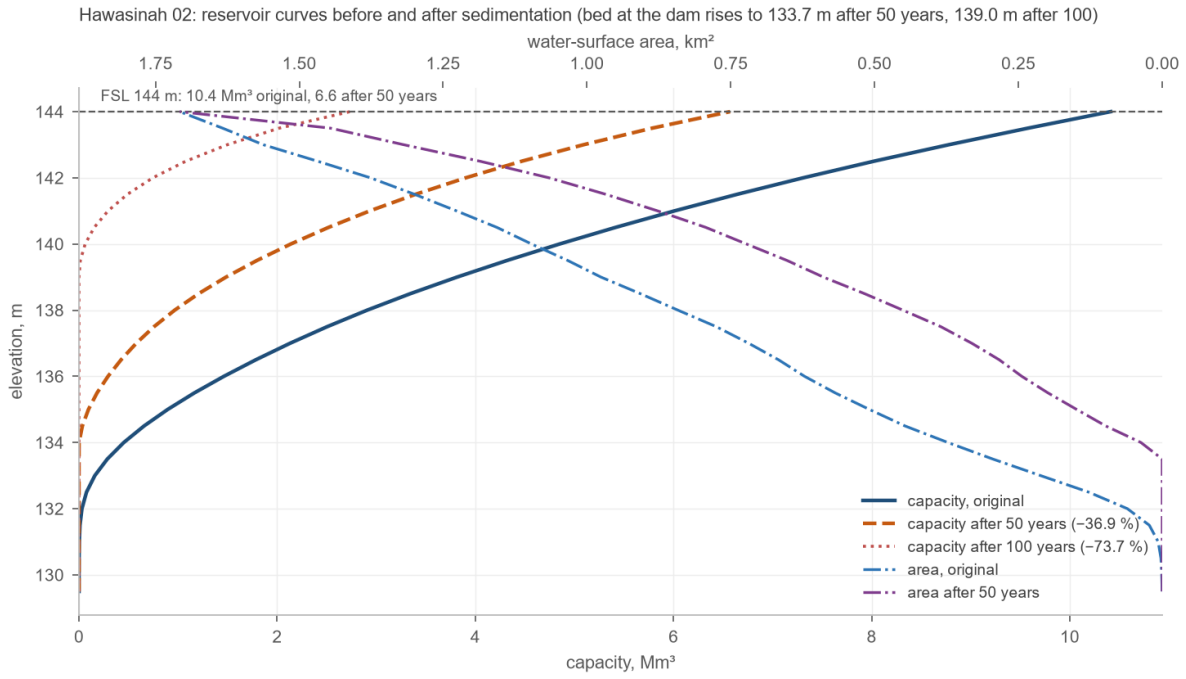


Figure 53 – Hawasinah 02: reservoir curves before and after sedimentation

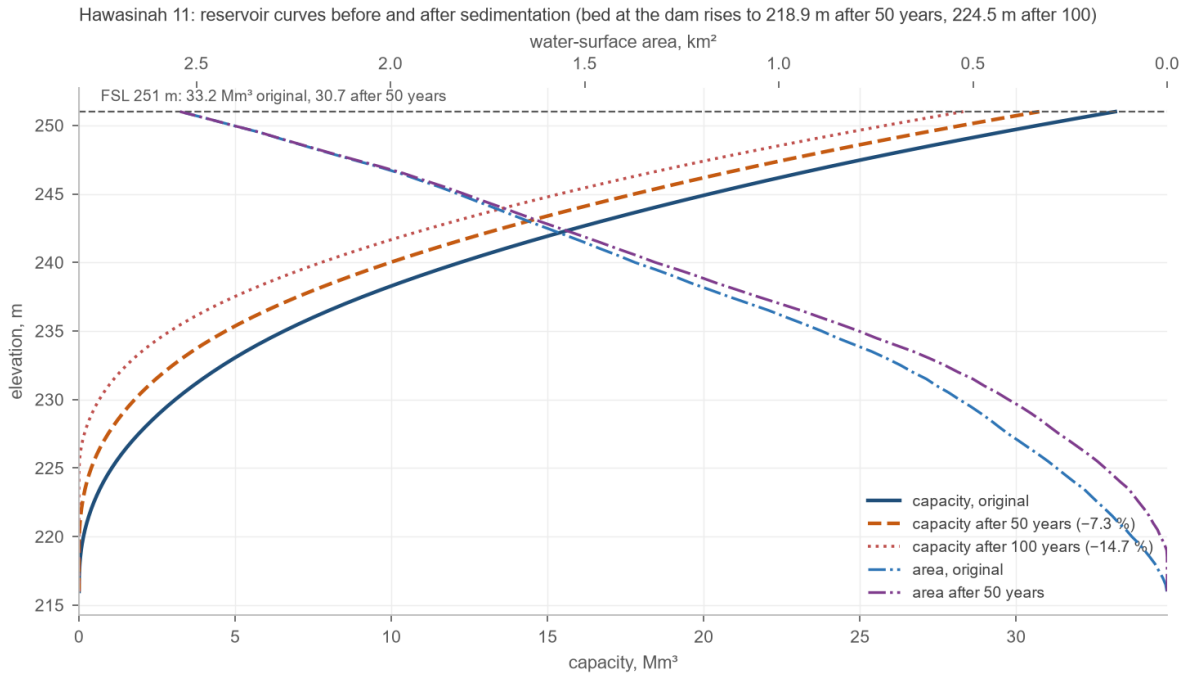


Figure 54 – Hawasinah 11: reservoir curves before and after sedimentation

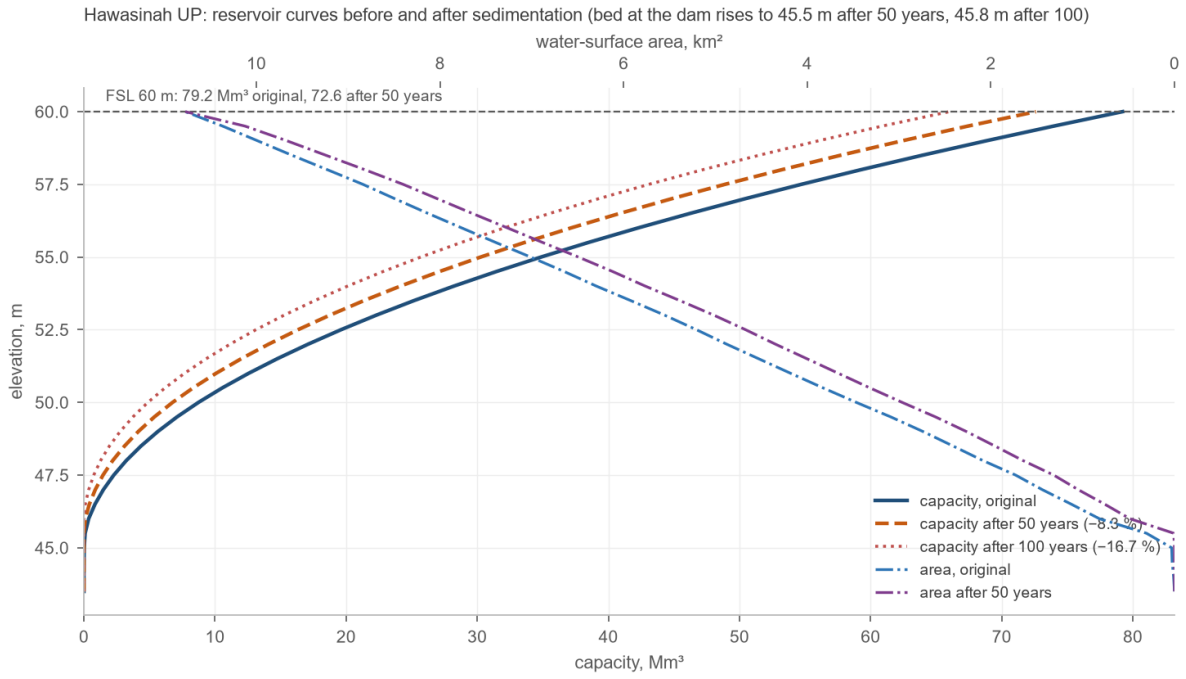


Figure 55 – Hawasinah UP: reservoir curves before and after sedimentation

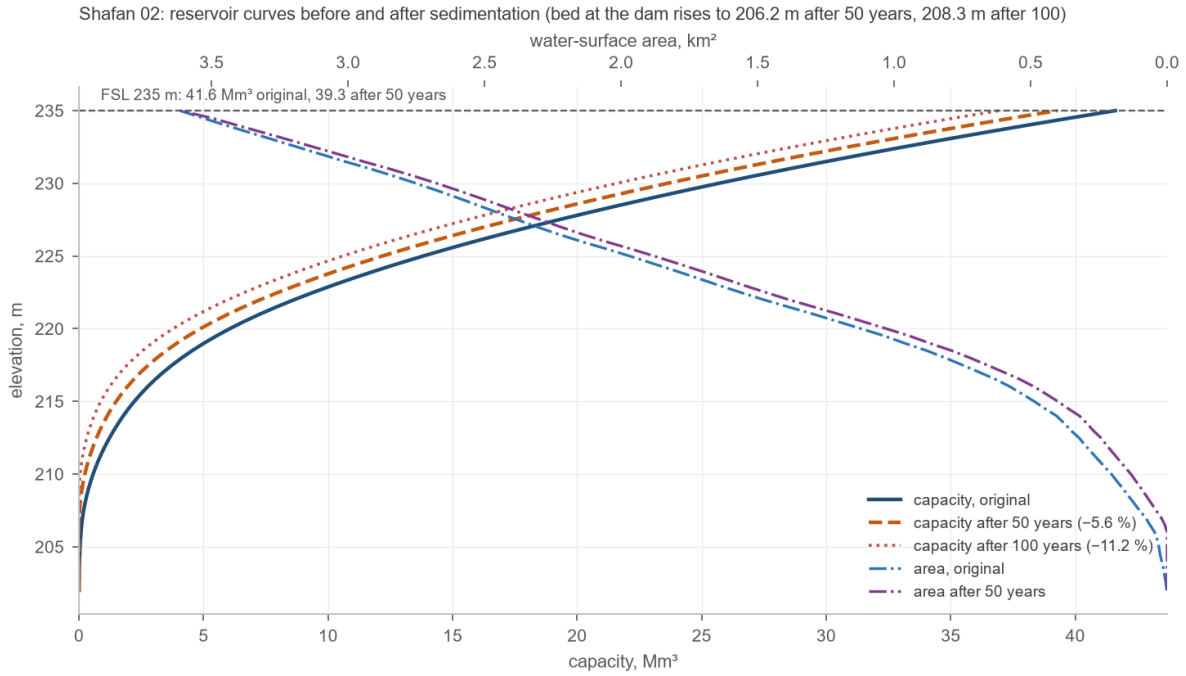


Figure 56 – Shafan 02: reservoir curves before and after sedimentation

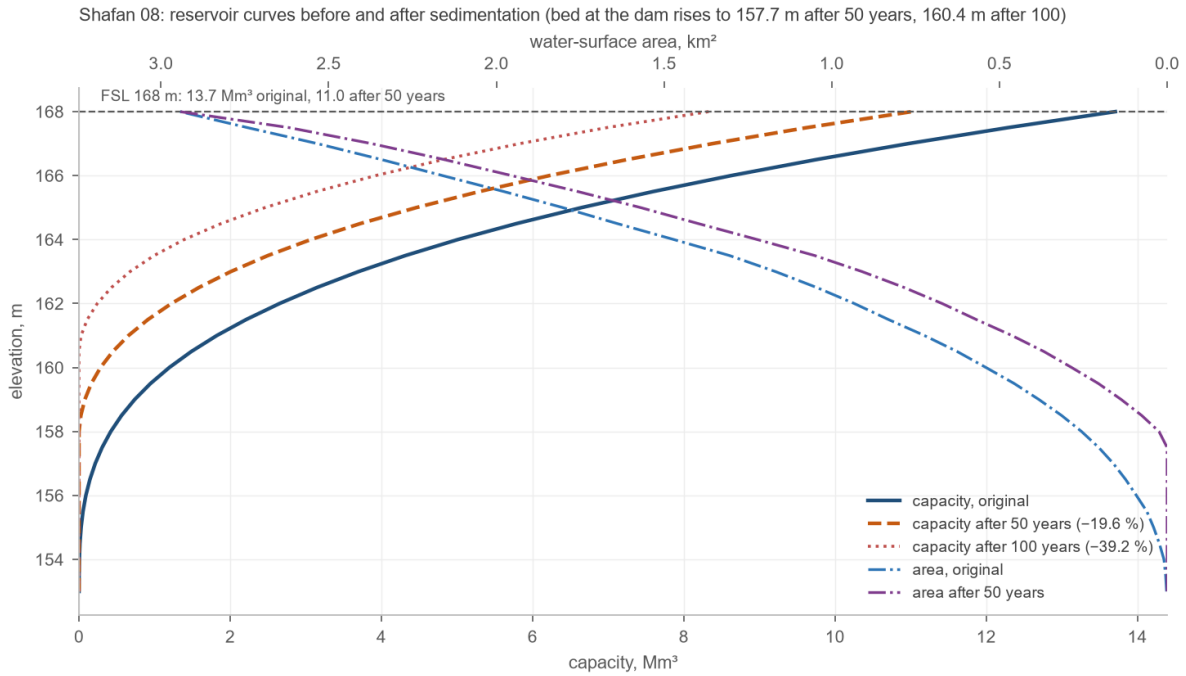


Figure 57 – Shafan 08: reservoir curves before and after sedimentation

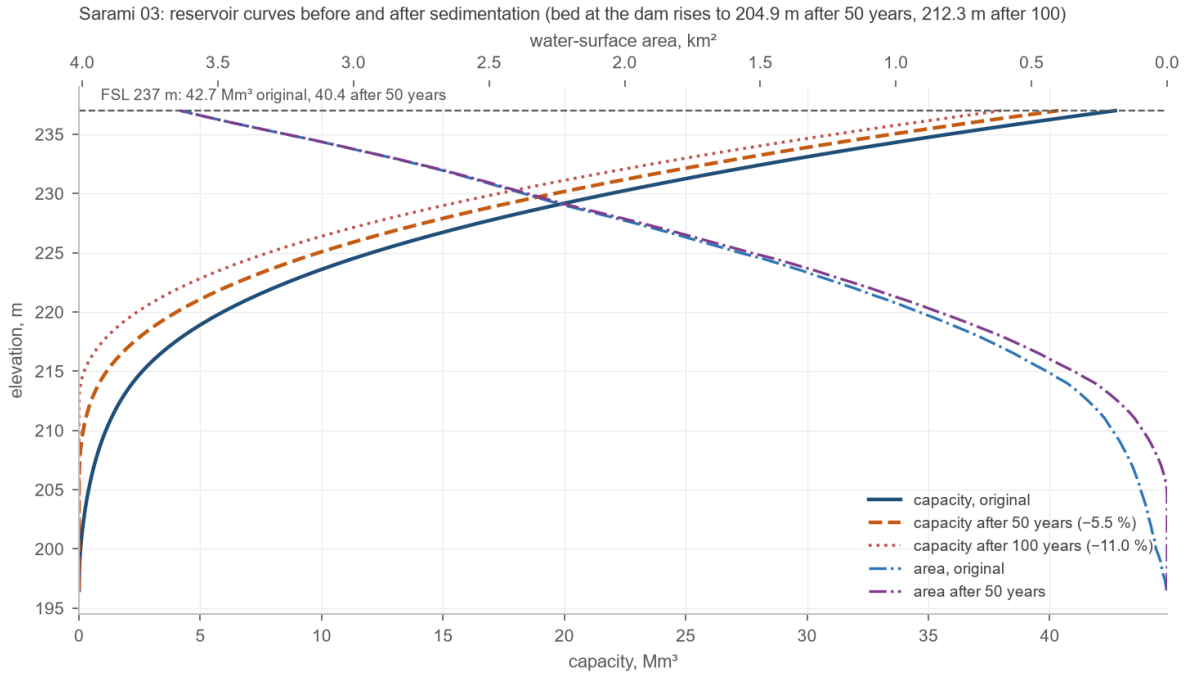


Figure 58 – Sarami 03: reservoir curves before and after sedimentation

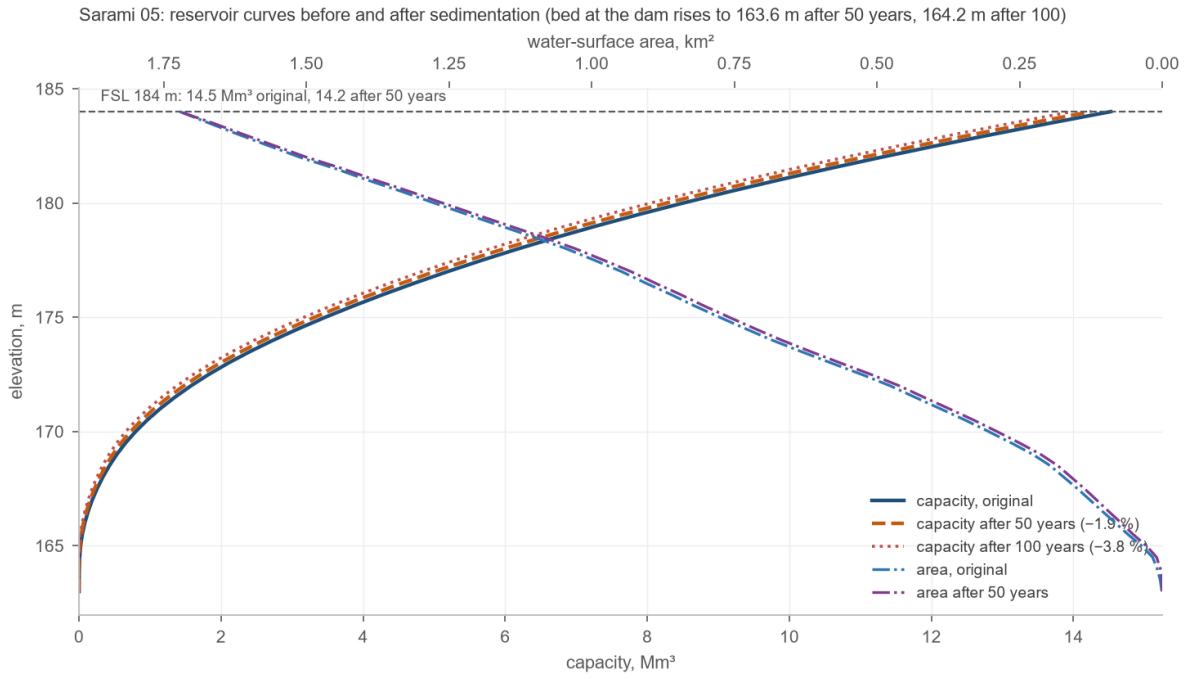


Figure 59 – Sarami 05: reservoir curves before and after sedimentation

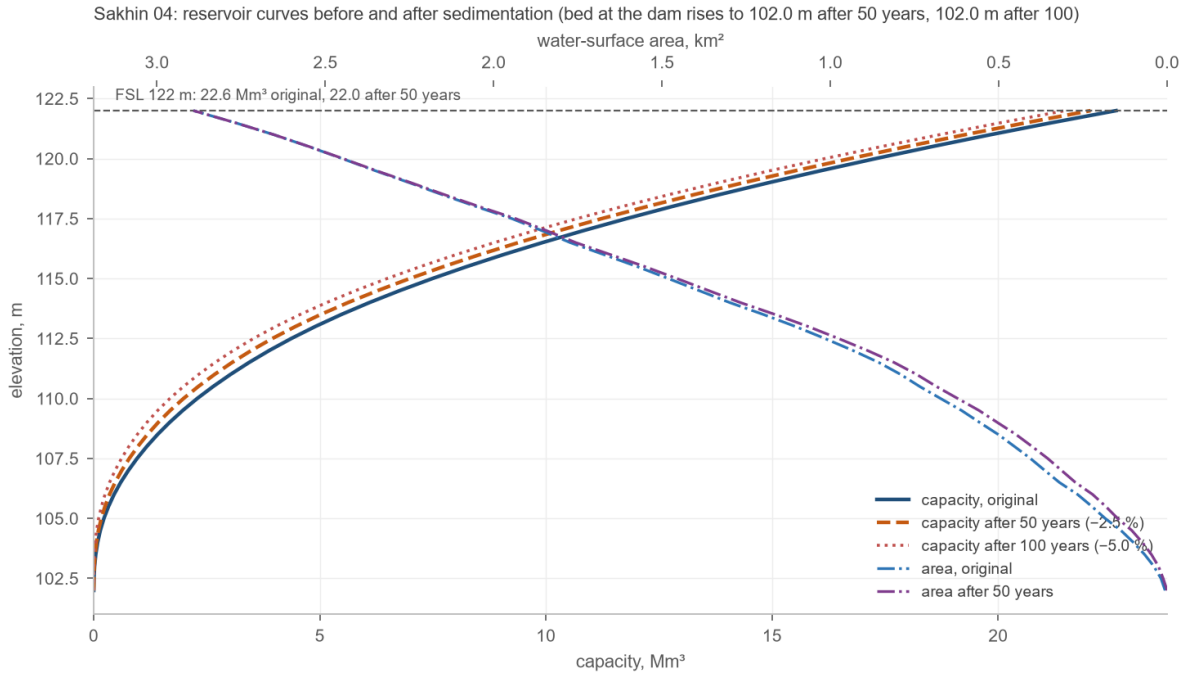


Figure 60 – Sakhin 04: reservoir curves before and after sedimentation

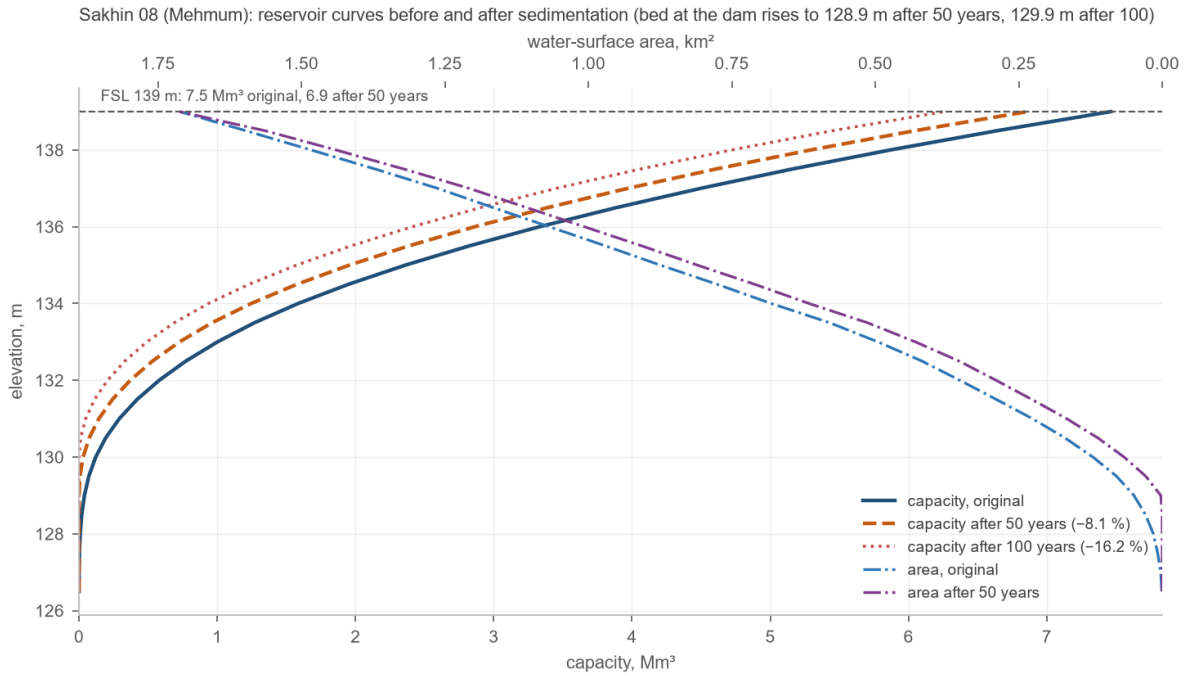


Figure 61 – Sakhin 08 (Mehmum): reservoir curves before and after sedimentation

APPENDIX C – REACH CHARACTERISTICS AT THE 200-YEAR FLOW

Every reach of the hydraulic model with its length, bed slope, roughness, velocity, size (depth x bed width) and 200-year design flow. Reaches without a modelled inflow carry no flow and take the minimum section.

Label	Length (m)	Slope (m/m)	Manning's n	Velocity (m/s)	Size (m)	Flow (m^3/s)
HAWCH1-C1	1,044	0.0047	0.030	3.20	2.5 x 29	174
HAWCH1-C2	2,090	0.0058	0.030	3.42	2.5 x 29	174
HAWCH1-C3	497	0.0120	0.030	4.29	2.5 x 29	174
HAWCH1-C4	2,727	0.0056	0.030	3.38	2.5 x 29	174
HAWCH1-C5	264	0.0010	0.030	1.54	2.5 x 60.5	174
HAWCH1-C6	415	0.0020	0.030	2.22	2.5 x 89.5	373
HAWCH1-C7	1,166	0.0023	0.030	2.13	3.0 x 89.5	299
HAWCH2-C1	1,508	0.0066	0.030	–	2.5 x 10	–
HAWCH2-C2	1,085	0.0059	0.030	3.47	2.5 x 20.5	132
HAWCH2-C3	902	0.0024	0.030	2.31	2.5 x 30.5	132
HAWCH2-C4	500	0.0100	0.030	3.59	2.5 x 30.5	132
HAWCH2-C5	2,046	0.0038	0.030	2.66	2.5 x 30.5	132
HAWCH2-C6	740	0.0052	0.030	3.37	2.5 x 30.5	190
HAWCH2-C7	364	0.0019	0.030	2.13	2.5 x 54	215
HAWCH2-C8	578	0.0035	0.030	2.55	2.5 x 54	215
HAWCH3-C1	1,440	0.0082	0.030	–	2.5 x 10	–
HAWCH4-C1	801	0.0079	0.030	–	2.5 x 10	–
HAWCH4-C2	584	0.0059	0.030	–	2.5 x 10	–
HAWCH5-C1	1,214	0.0068	0.030	–	2.5 x 10	–
HAWCH5-C2	868	0.0053	0.030	3.25	2.5 x 19	115
HAWCH5-C3	1,012	0.0045	0.030	3.03	2.5 x 20.5	115
HAWCH5-C4	500	0.0100	0.030	3.89	2.5 x 20.5	115
HAWCH5-C5	1,813	0.0060	0.030	3.31	2.5 x 20.5	115
HAWCH5-C6	1,325	0.0028	0.030	2.54	2.5 x 42	199
HAWCH5-C7	333	0.0036	0.030	2.69	2.5 x 44.5	199
HAWCH6-C1	1,270	0.0034	0.030	1.98	2.5 x 10	25
HAWCH7-C1	1,238	0.0045	0.030	2.83	2.5 x 12.5	66
HAWCH7-C2	500	0.0110	0.030	3.81	2.5 x 12.5	66
HAWCH7-C3	1,260	0.0040	0.030	2.71	2.5 x 13	66
HAWCH7-C4	1,538	0.0024	0.030	2.21	2.5 x 19.5	80
HAWCH7-C5	688	0.0070	0.030	3.10	2.5 x 19.5	80
HAWCH7-C6	1,284	0.0010	0.030	1.48	2.5 x 29	80
SHACH1-C1	720	0.0039	0.030	3.13	2.5 x 156.5	917
SHACH1-C2	575	0.0050	0.030	3.36	2.5 x 156.5	917
SHACH1-C3	615	0.0057	0.030	3.50	2.5 x 156.5	917
SHACH1-C4	1,091	0.0030	0.030	2.73	2.5 x 179.5	917
SHACH1-C5	500	0.0097	0.030	3.89	2.5 x 179.5	917
SHACH1-C6	987	0.0047	0.030	3.12	2.5 x 179.5	917
SHACH1-C7	381	0.0054	0.030	3.27	2.5 x 179.5	917
SHACH1-C8	353	0.0056	0.030	3.35	2.5 x 179.5	956
SHACH1-C9	393	0.0051	0.030	3.29	2.5 x 179.5	971
SHACH1-C10	1,009	0.0028	0.030	2.65	2.5 x 195.5	971
SHACH1-C11	499	0.0024	0.030	2.43	2.5 x 218.5	996
SHACH1-C12	920	0.0032	0.030	2.66	3.0 x 218.5	996
SHACH2-C1	1,649	0.0069	0.030	4.07	2.5 x 83.5	637

Label	Length (m)	Slope (m/m)	Manning's n	Velocity (m/s)	Size (m)	Flow (m^3/s)
SHACH2-C2	1,310	0.0064	0.030	3.94	2.5 x 86.5	637
SHACH2-C3	965	0.0077	0.030	4.16	2.5 x 86.5	637
SHACH2-C4	2,264	0.0075	0.030	4.13	2.5 x 86.5	637
SHACH2-C5	2,783	0.0047	0.030	3.40	2.5 x 100	637
SHACH2-C6	500	0.0116	0.030	4.46	2.5 x 100	637
SHACH2-C7	714	0.0041	0.030	3.16	2.5 x 107.5	637
SHACH2-C8	1,252	0.0059	0.030	3.54	2.5 x 107.5	637
SHACH3-C1	863	0.0066	0.030	–	2.5 x 10	–
SHACH3-C2	830	0.0071	0.030	–	2.5 x 10	–
SHACH3-C3	546	0.0047	0.030	–	2.5 x 10	–
SHACH3-C4	2,030	0.0064	0.030	–	2.5 x 10	–
SHACH3-C5	1,667	0.0084	0.030	4.38	2.5 x 40	327
SHACH3-C6	2,104	0.0068	0.030	3.95	2.5 x 44.5	327
SHACH3-C7	454	0.0031	0.030	2.69	2.5 x 65	327
SHACH3-C8	500	0.0082	0.030	3.64	2.5 x 65	327
SHACH3-C9	1,306	0.0053	0.030	3.18	2.5 x 65	327
SHACH3-C10	503	0.0041	0.030	3.02	2.5 x 65	348
SHACH3-C11	484	0.0044	0.030	3.08	2.5 x 65	348
SHACH3-C12	891	0.0038	0.030	2.94	2.5 x 65	348
SHACH3-C13	443	0.0022	0.030	2.32	2.5 x 97	421
SHACH3-C14	442	0.0042	0.030	2.81	2.5 x 97	421
SHACH3-C15	729	0.0031	0.030	2.75	2.5 x 124.5	641
SHACH3-C16	86	0.0010	0.030	1.59	2.5 x 267	795
SHACH4-C1	780	0.0040	0.030	3.13	2.5 x 94.5	554
SHACH4-C2	1,189	0.0053	0.030	3.40	2.5 x 94.5	554
SHACH4-C3	962	0.0026	0.030	2.55	2.5 x 116	554
SHACH4-C4	871	0.0076	0.030	3.51	2.5 x 116	554
SHACH4-C5	1,579	0.0037	0.030	2.83	2.5 x 116	560
SHACH4-C6	500	0.0066	0.030	3.38	2.5 x 116	560
SHACH4-C7	837	0.0036	0.030	2.81	2.5 x 116	560
SHACH4-C8	589	0.0054	0.030	3.19	2.5 x 116	562
SHACH4-C9	861	0.0026	0.030	2.54	2.5 x 118	562
SHACH4-C10	109	0.0010	0.030	1.59	2.5 x 253	753
SHACH5-C1	4,768	0.0055	0.030	3.35	2.5 x 20.5	127
SHACH5-C2	1,017	0.0081	0.030	3.77	2.5 x 20.5	127
SHACH5-C3	1,398	0.0034	0.030	2.78	2.5 x 46	239
SHACH5-C4	500	0.0066	0.030	3.42	2.5 x 46	239
SHACH5-C5	550	0.0040	0.030	2.93	2.5 x 46	239
SHACH5-C6	1,684	0.0031	0.030	2.66	2.5 x 50	249
SHACH6-C1	1,717	0.0040	0.030	2.76	2.5 x 14.5	75
SHACH6-C2	1,306	0.0014	0.030	1.78	2.5 x 46	154
SHACH6-C3	500	0.0080	0.030	3.06	2.5 x 46	154
SHACH6-C4	883	0.0030	0.030	2.26	2.5 x 46	154
SHACH6-C5	351	0.0060	0.030	2.81	2.5 x 46	154
SHACH6-C6	402	0.0082	0.030	3.09	2.5 x 46	154
SHACH7-C1	698	0.0070	0.030	3.61	2.5 x 15	99
SHACH7-C2	1,170	0.0042	0.030	3.03	2.5 x 29.5	167
SHACH7-C3	827	0.0075	0.030	3.62	2.5 x 29.5	167
SHACH7-C4	1,008	0.0031	0.030	2.64	2.5 x 43	211
SHACH7-C5	675	0.0036	0.030	2.77	2.5 x 43	211
SHACH7-C6	660	0.0017	0.030	2.01	2.5 x 56	211

Label	Length (m)	Slope (m/m)	Manning's n	Velocity (m/s)	Size (m)	Flow (m^3/s)
SHACH7-C7	699	0.0039	0.030	2.86	2.5 x 56	273
SHACH7-C8	693	0.0028	0.030	2.54	2.5 x 57.5	273
SHACH7-C9	976	0.0027	0.030	2.52	2.5 x 58	273
SHACH8-C1	1,392	0.0058	0.030	3.22	2.5 x 13	76
SHACH8-C2	1,899	0.0030	0.030	2.43	2.5 x 17	76
SHACH8-C3	589	0.0062	0.030	3.06	2.5 x 17	76
SHACH8-C4	647	0.0021	0.030	2.06	2.5 x 20	76
SHACH8-C5	1,357	0.0039	0.030	2.52	2.5 x 20	76
SHACH9-C1	2,230	0.0055	0.030	2.98	2.5 x 10	53
SHACH9-C2	399	0.0052	0.030	3.29	2.5 x 22	136
SHACH9-C3	703	0.0010	0.030	1.52	2.5 x 47.5	136
SHACH9-C4	569	0.0071	0.030	2.78	2.5 x 47.5	136
SHACH9-C5	795	0.0048	0.030	2.46	2.5 x 47.5	136
SHACH9-C6	794	0.0010	0.030	1.53	2.5 x 52	149
SHACH10-C1	1,941	0.0061	0.030	3.60	2.5 x 25	168
SHACH10-C2	1,004	0.0016	0.030	1.95	2.5 x 57.5	210
SHACH10-C3	809	0.0084	0.030	3.23	2.5 x 57.5	210
SHACH10-C4	1,044	0.0033	0.030	2.45	2.5 x 57.5	213
SHACH10-C5	576	0.0026	0.030	2.48	2.5 x 72.5	336
SHACH11-C1	1,352	0.0033	0.030	2.60	2.5 x 22	106
SHACH11-C2	1,075	0.0073	0.030	3.34	2.5 x 22	106
SHACH12-C1	649	0.0079	0.030	–	2.5 x 10	–
SHACH12-C2	800	0.0075	0.030	–	2.5 x 10	–
SHACH12-C3	1,076	0.0076	0.030	–	2.5 x 10	–
SHACH12-C4	501	0.0085	0.030	–	2.5 x 10	–
SHACH12-C5	748	0.0078	0.030	–	2.5 x 10	–
SHACH13-C1	1,642	0.0050	0.030	3.40	2.5 x 49.5	313
SHACH14-C1	1,856	0.0061	0.030	3.25	2.5 x 12	71
SHACH14-C2	653	0.0031	0.030	2.54	2.5 x 24	113
SHACH14-C3	500	0.0046	0.030	2.88	2.5 x 24	113
SHACH14-C4	935	0.0043	0.030	2.83	2.5 x 24	113
SHACH15-C1	821	0.0043	0.030	2.60	2.5 x 10	45
SHACH15-C2	659	0.0118	0.030	3.62	2.5 x 10	45
SHACH15-C3	843	0.0049	0.030	2.71	2.5 x 10	45
SHACH15-C4	559	0.0048	0.030	3.06	2.5 x 16.5	94
SHACH15-C5	500	0.0031	0.030	2.51	2.5 x 20	94
SHACH15-C6	1,205	0.0035	0.030	2.62	2.5 x 20	94
SHACH15-C7	809	0.0051	0.030	3.22	2.5 x 20	120
SHACH15-C8	1,412	0.0023	0.030	2.24	2.5 x 28.5	120
SHACH16-C1	1,505	0.0053	0.030	3.13	2.5 x 14	82
SHACH16-C2	500	0.0090	0.030	3.72	2.5 x 14	82
SHACH16-C3	667	0.0043	0.030	2.85	2.5 x 15.5	82
SHACH16-C4	1,050	0.0023	0.030	2.21	2.5 x 25.5	105
SHACH16-C5	499	0.0071	0.030	3.15	2.5 x 25.5	105
SHACH16-C6	1,887	0.0048	0.030	2.78	2.5 x 25.5	105
SHACH16-C7	317	0.0010	0.030	1.50	2.5 x 37.5	105
SHACH17-C1	1,762	0.0069	0.030	3.85	2.5 x 29	207
SHACH17-C2	970	0.0037	0.030	2.88	2.5 x 38.5	207
SHACH17-C3	500	0.0079	0.030	3.65	2.5 x 38.5	207
SHACH17-C4	1,172	0.0040	0.030	2.96	2.5 x 38.5	207
SHACH17-C5	704	0.0031	0.030	2.65	2.5 x 42	207

Label	Length (m)	Slope (m/m)	Manning's n	Velocity (m/s)	Size (m)	Flow (m^3/s)
SHACH18-C1	733	0.0013	0.030	1.72	2.5 x 37	119
SHACH18-C2	500	0.0116	0.030	3.36	2.5 x 37	119
SHACH18-C3	537	0.0025	0.030	2.11	2.5 x 37	119
SHACH18-C4	1,250	0.0053	0.030	2.65	2.5 x 37	119
SHACH19-C1	1,812	0.0024	0.030	–	2.5 x 10	–
SHACH20-C1	858	0.0056	0.030	3.14	2.5 x 12.5	72
SHACH20-C2	1,243	0.0044	0.030	2.86	2.5 x 13.5	72
SHACH20-C3	1,040	0.0026	0.030	2.45	2.5 x 40.5	185
SHACH20-C4	614	0.0047	0.030	2.93	2.5 x 40.5	185
SHACH21-C1	1,089	0.0062	0.030	3.30	2.5 x 11.5	71
SARCH1-C1	760	0.0059	0.030	3.73	2.5 x 58	403
SARCH1-C2	1,322	0.0094	0.030	4.30	2.5 x 58	403
SARCH1-C3	970	0.0085	0.030	4.16	2.5 x 58	403
SARCH1-C4	1,917	0.0081	0.030	4.11	2.5 x 58	403
SARCH1-C5	2,951	0.0069	0.030	3.91	2.5 x 58	403
SARCH1-C6	1,945	0.0061	0.030	3.83	2.5 x 77.5	555
SARCH1-C7	1,674	0.0049	0.030	3.43	2.5 x 86.5	555
SARCH1-C8	744	0.0089	0.030	4.12	2.5 x 86.5	555
SARCH1-C9	1,011	0.0041	0.030	3.15	2.5 x 94	555
SARCH1-C10	713	0.0075	0.030	3.79	2.5 x 94	555
SARCH1-C11	1,090	0.0028	0.030	2.65	2.5 x 209	1,036
SARCH1-C12	575	0.0050	0.030	3.16	2.5 x 209	1,036
SARCH1-C13	1,597	0.0031	0.030	2.70	2.5 x 209	1,013
SARCH1-C14	284	0.0010	0.030	1.59	2.5 x 343	1,022
SARCH2-C1	681	0.0033	0.030	2.75	2.5 x 49	251
SARCH2-C2	1,037	0.0051	0.030	3.14	2.5 x 49	251
SARCH2-C3	517	0.0035	0.030	2.80	2.5 x 49	251
SARCH2-C4	799	0.0015	0.030	1.89	2.5 x 94	333
SARCH2-C5	497	0.0067	0.030	3.00	2.5 x 94	333
SARCH2-C6	2,611	0.0031	0.030	2.37	2.5 x 94	333
SARCH3-C1	3,014	0.0084	0.030	4.38	2.5 x 41	336
SARCH3-C2	760	0.0065	0.030	3.88	2.5 x 46.5	336
SARCH3-C3	2,179	0.0072	0.030	4.00	2.5 x 46.5	336
SARCH3-C4	913	0.0058	0.030	3.66	2.5 x 49	336
SARCH4-C1	2,374	0.0030	0.030	2.36	2.5 x 15	65
SARCH4-C2	731	0.0087	0.030	3.33	2.5 x 15	65
SAKCH1-C1	672	0.0077	0.030	4.26	2.5 x 58.5	465
SAKCH1-C2	458	0.0103	0.030	4.65	2.5 x 58.5	465
SAKCH1-C3	867	0.0070	0.030	4.05	2.5 x 61.5	465
SAKCH1-C4	994	0.0057	0.030	3.69	2.5 x 67.5	465
SAKCH1-C5	1,305	0.0063	0.030	3.93	2.5 x 96	708
SAKCH1-C6	1,869	0.0056	0.030	3.69	2.5 x 102.5	708
SAKCH1-C7	1,297	0.0068	0.030	3.92	2.5 x 102.5	708
SAKCH1-C8	1,113	0.0046	0.030	3.36	2.5 x 112.5	708
SAKCH1-C9	743	0.0033	0.030	2.85	2.5 x 132.5	708
SAKCH1-C10	1,087	0.0057	0.030	3.37	2.5 x 132.5	708
SAKCH1-C11	1,249	0.0021	0.030	2.28	2.5 x 165.5	708
SAKCH1-C12	814	0.0010	0.030	1.59	2.5 x 238	708
SAKCH2-C1	901	0.0068	0.030	4.03	2.5 x 74.5	561
SAKCH2-C2	1,456	0.0040	0.030	3.11	2.5 x 96.5	561
SAKCH2-C3	766	0.0036	0.030	2.88	2.5 x 109.5	561

Label	Length (m)	Slope (m/m)	Manning's n	Velocity (m/s)	Size (m)	Flow (m^3/s)
SAKCH2-C4	1,928	0.0060	0.030	3.51	2.5 x 238	1,349
SAKCH2-C5	2,499	0.0029	0.030	2.69	2.5 x 268	1,352
SAKCH2-C6	1,218	0.0024	0.030	2.45	2.5 x 317.5	1,461
SAKCH2-C7	1,012	0.0010	0.030	1.60	2.5 x 488	1,461
SAKCH3-C1	1,858	0.0029	0.030	2.59	2.5 x 45	218
SAKCH3-C2	1,862	0.0023	0.030	2.31	2.5 x 60	259
SAKCH3-C3	702	0.0034	0.030	2.61	2.5 x 60	259
SAKCH3-C4	656	0.0026	0.030	2.41	2.5 x 60	259
SAKCH3-C5	979	0.0043	0.030	2.83	2.5 x 60	264
SAKCH3-C6	416	0.0010	0.030	1.56	2.5 x 90.5	264
SAKCH4-C1	1,348	0.0039	0.030	–	2.5 x 10	–
SAKCH4-C2	573	0.0015	0.030	–	2.5 x 10	–
SAKCH5-C1	1,677	0.0040	0.030	2.73	2.5 x 14	71
SAKCH5-C2	1,096	0.0010	0.030	1.53	2.5 x 52.5	149

APPENDIX D – PLAN AND PROFILE DRAWINGS

The plan and profile drawings of the 37 channels for the 200-year design are issued as a separate set; the sheets are listed by channel.

Channel	Sheets	First drawing	Last drawing
HAW-CH1-FP	10	2224-PD-HY-PP-B4-001	2224-PD-HY-PP-B4-010
HAW-CH2-SS	9	2224-PD-HY-PP-B4-011	2224-PD-HY-PP-B4-019
HAW-CH3-SS	3	2224-PD-HY-PP-B4-020	2224-PD-HY-PP-B4-022
HAW-CH4-SS	3	2224-PD-HY-PP-B4-023	2224-PD-HY-PP-B4-025
HAW-CH5-SS	9	2224-PD-HY-PP-B4-026	2224-PD-HY-PP-B4-034
HAW-CH6-SS	3	2224-PD-HY-PP-B4-035	2224-PD-HY-PP-B4-037
HAW-CH7-SS	8	2224-PD-HY-PP-B4-038	2224-PD-HY-PP-B4-045
SHA-CH1-FP	10	2224-PD-HY-PP-B4-046	2224-PD-HY-PP-B4-055
SHA-CH2-SM	13	2224-PD-HY-PP-B4-056	2224-PD-HY-PP-B4-068
SHA-CH3-SM	15	2224-PD-HY-PP-B4-069	2224-PD-HY-PP-B4-083
SHA-CH4-SM	10	2224-PD-HY-PP-B4-084	2224-PD-HY-PP-B4-093
SHA-CH5-SM	11	2224-PD-HY-PP-B4-094	2224-PD-HY-PP-B4-104
SHA-CH6-SM	7	2224-PD-HY-PP-B4-105	2224-PD-HY-PP-B4-111
SHA-CH7-SM	9	2224-PD-HY-PP-B4-112	2224-PD-HY-PP-B4-120
SHA-CH8-SS	7	2224-PD-HY-PP-B4-121	2224-PD-HY-PP-B4-127
SHA-CH9-SS	7	2224-PD-HY-PP-B4-128	2224-PD-HY-PP-B4-134
SHA-CH10-SS	7	2224-PD-HY-PP-B4-135	2224-PD-HY-PP-B4-141
SHA-CH11-SS	4	2224-PD-HY-PP-B4-142	2224-PD-HY-PP-B4-145
SHA-CH12-SS	5	2224-PD-HY-PP-B4-146	2224-PD-HY-PP-B4-150
SHA-CH13-SS	3	2224-PD-HY-PP-B4-151	2224-PD-HY-PP-B4-153
SHA-CH14-SS	5	2224-PD-HY-PP-B4-154	2224-PD-HY-PP-B4-158
SHA-CH15-SS	8	2224-PD-HY-PP-B4-159	2224-PD-HY-PP-B4-166
SHA-CH16-SS	8	2224-PD-HY-PP-B4-167	2224-PD-HY-PP-B4-174
SHA-CH17-SS	7	2224-PD-HY-PP-B4-175	2224-PD-HY-PP-B4-181
SHA-CH18-SS	5	2224-PD-HY-PP-B4-182	2224-PD-HY-PP-B4-186
SHA-CH19-SS	3	2224-PD-HY-PP-B4-187	2224-PD-HY-PP-B4-189
SHA-CH20-SS	5	2224-PD-HY-PP-B4-190	2224-PD-HY-PP-B4-194
SHA-CH21-SS	3	2224-PD-HY-PP-B4-195	2224-PD-HY-PP-B4-197
SAR-CH1-FP	19	2224-PD-HY-PP-B4-198	2224-PD-HY-PP-B4-216
SAR-CH2-SM	8	2224-PD-HY-PP-B4-217	2224-PD-HY-PP-B4-224
SAR-CH3-SS	8	2224-PD-HY-PP-B4-225	2224-PD-HY-PP-B4-232
SAR-CH4-SS	5	2224-PD-HY-PP-B4-233	2224-PD-HY-PP-B4-237
SAK-CH1-FP	14	2224-PD-HY-PP-B4-238	2224-PD-HY-PP-B4-251
SAK-CH2-FP	11	2224-PD-HY-PP-B4-252	2224-PD-HY-PP-B4-262
SAK-CH3-SM	8	2224-PD-HY-PP-B4-263	2224-PD-HY-PP-B4-270
SAK-CH4-SS	3	2224-PD-HY-PP-B4-271	2224-PD-HY-PP-B4-273
SAK-CH5-SS	4	2224-PD-HY-PP-B4-274	2224-PD-HY-PP-B4-277

APPENDIX E – COSTS DASHBOARD

The estimate of 268.8 million OMR at a glance: the channel, dyke and culvert costs by catchment and by type, then the cost of every channel, dyke and culvert of the scheme.

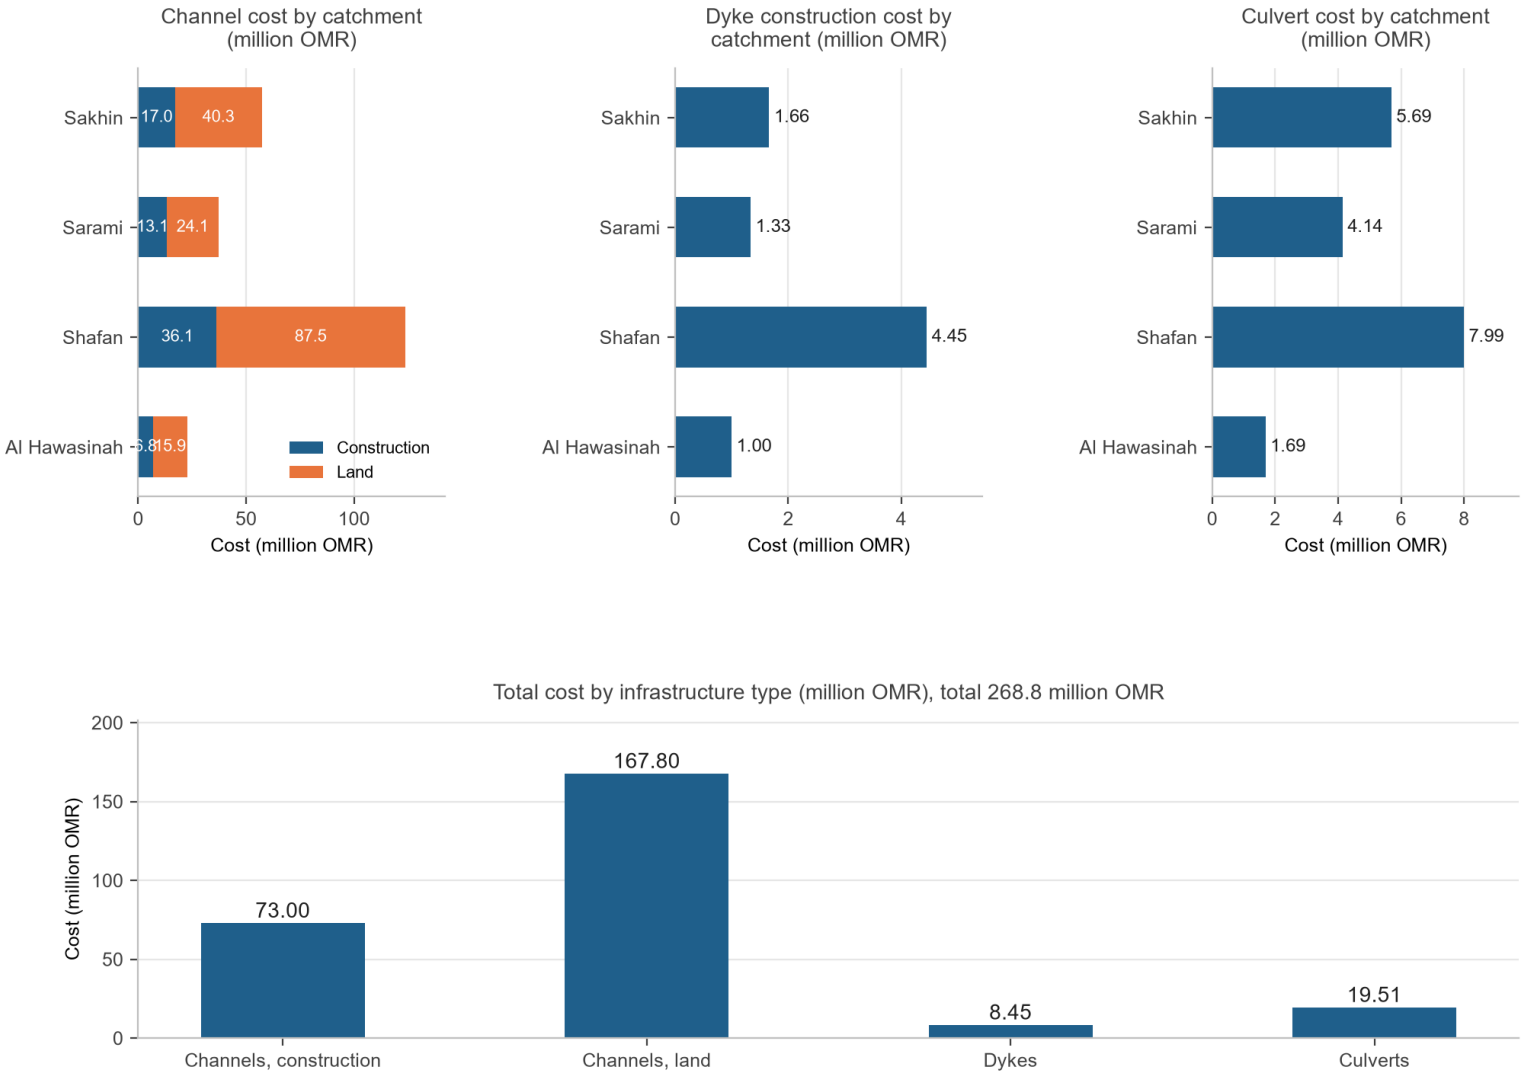


Figure 62 – Costs dashboard: channels, dykes and culverts by catchment, and the total by infrastructure type

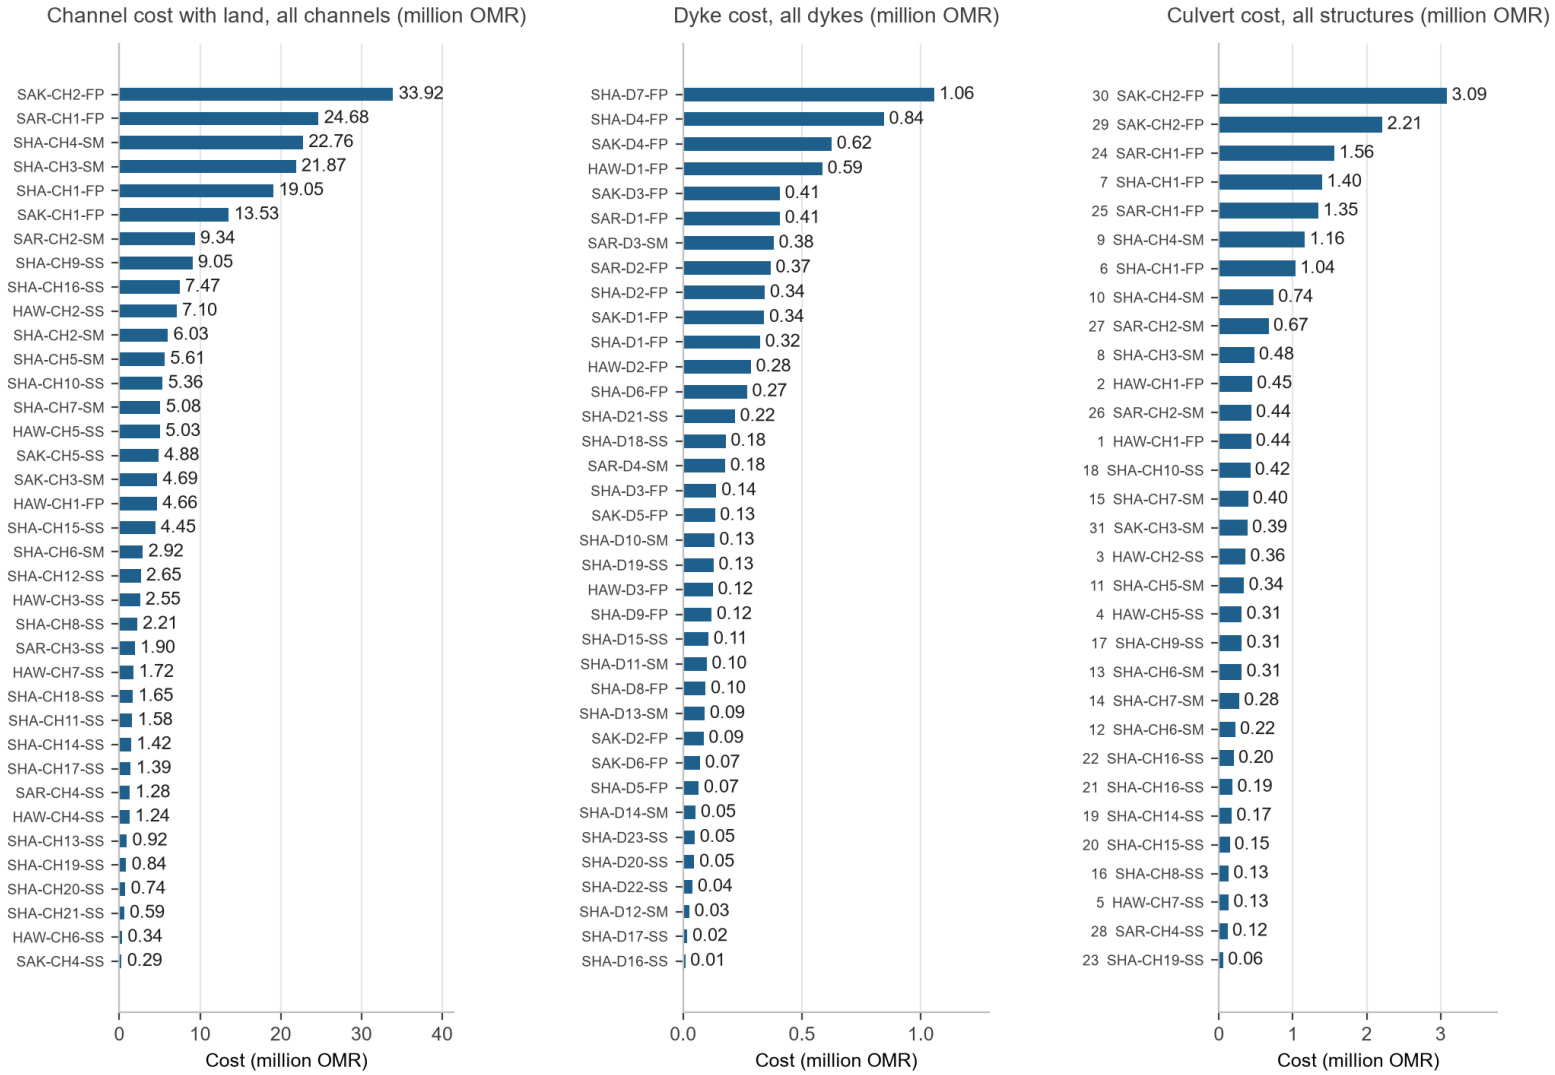


Figure 63 – Costs dashboard: every channel, dyke and culvert